



Маечка 128-170 pp Отто 2011/4 мод.34

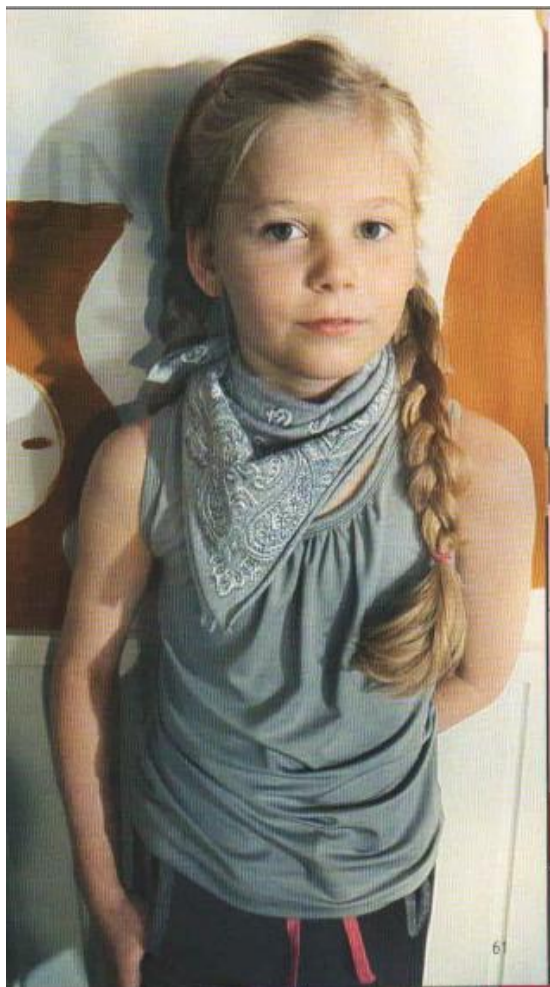

34. Glow-worm jersey top 128-134-140-146-152-158-164-170 cm Page 61

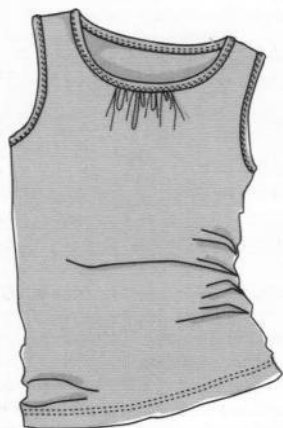

MATERIALS

- 50-50-55-55-60-60-65-65 cm viscose jersey (CV/EL), stretch/recovery 30%
- 12 cm clear elastic tape, width 5 mm, Framilon®

CUTTING


Cut front and back panels from jersey as indicated on list of pattern pieces. Do not add seam allowances to neckline and armholes.

Cut also 4 cm wide binding strips for finishing neckline and armholes. If you use a binder attachment on your coverstitch machine to attach the bindings, cut the binding strips in the width that fits the binder.

SEWING

Construction techniques: Stitch seams with serger or with overedge stretch stitch on regular sewing machine. See general instructions for finishing edges with binding on p. 44.


Joining: Stitch piece of clear elastic tape to right side of front neckline seam allowance, gathering portion between notches to width of 10 cm. Stitch left shoulder seam. Finish neckline with binding. Stitch right shoulder seam. Finish armholes with binding. Stitch side seams. Stitch shoulder seam allowances at neckline and side seam allowances at armholes flat across width of bindings. Fold up, press and stitch bottom hem as marked on pattern.




PATTERN PIECES cut

1 front	
2 back	


PATTERN SHEET F red

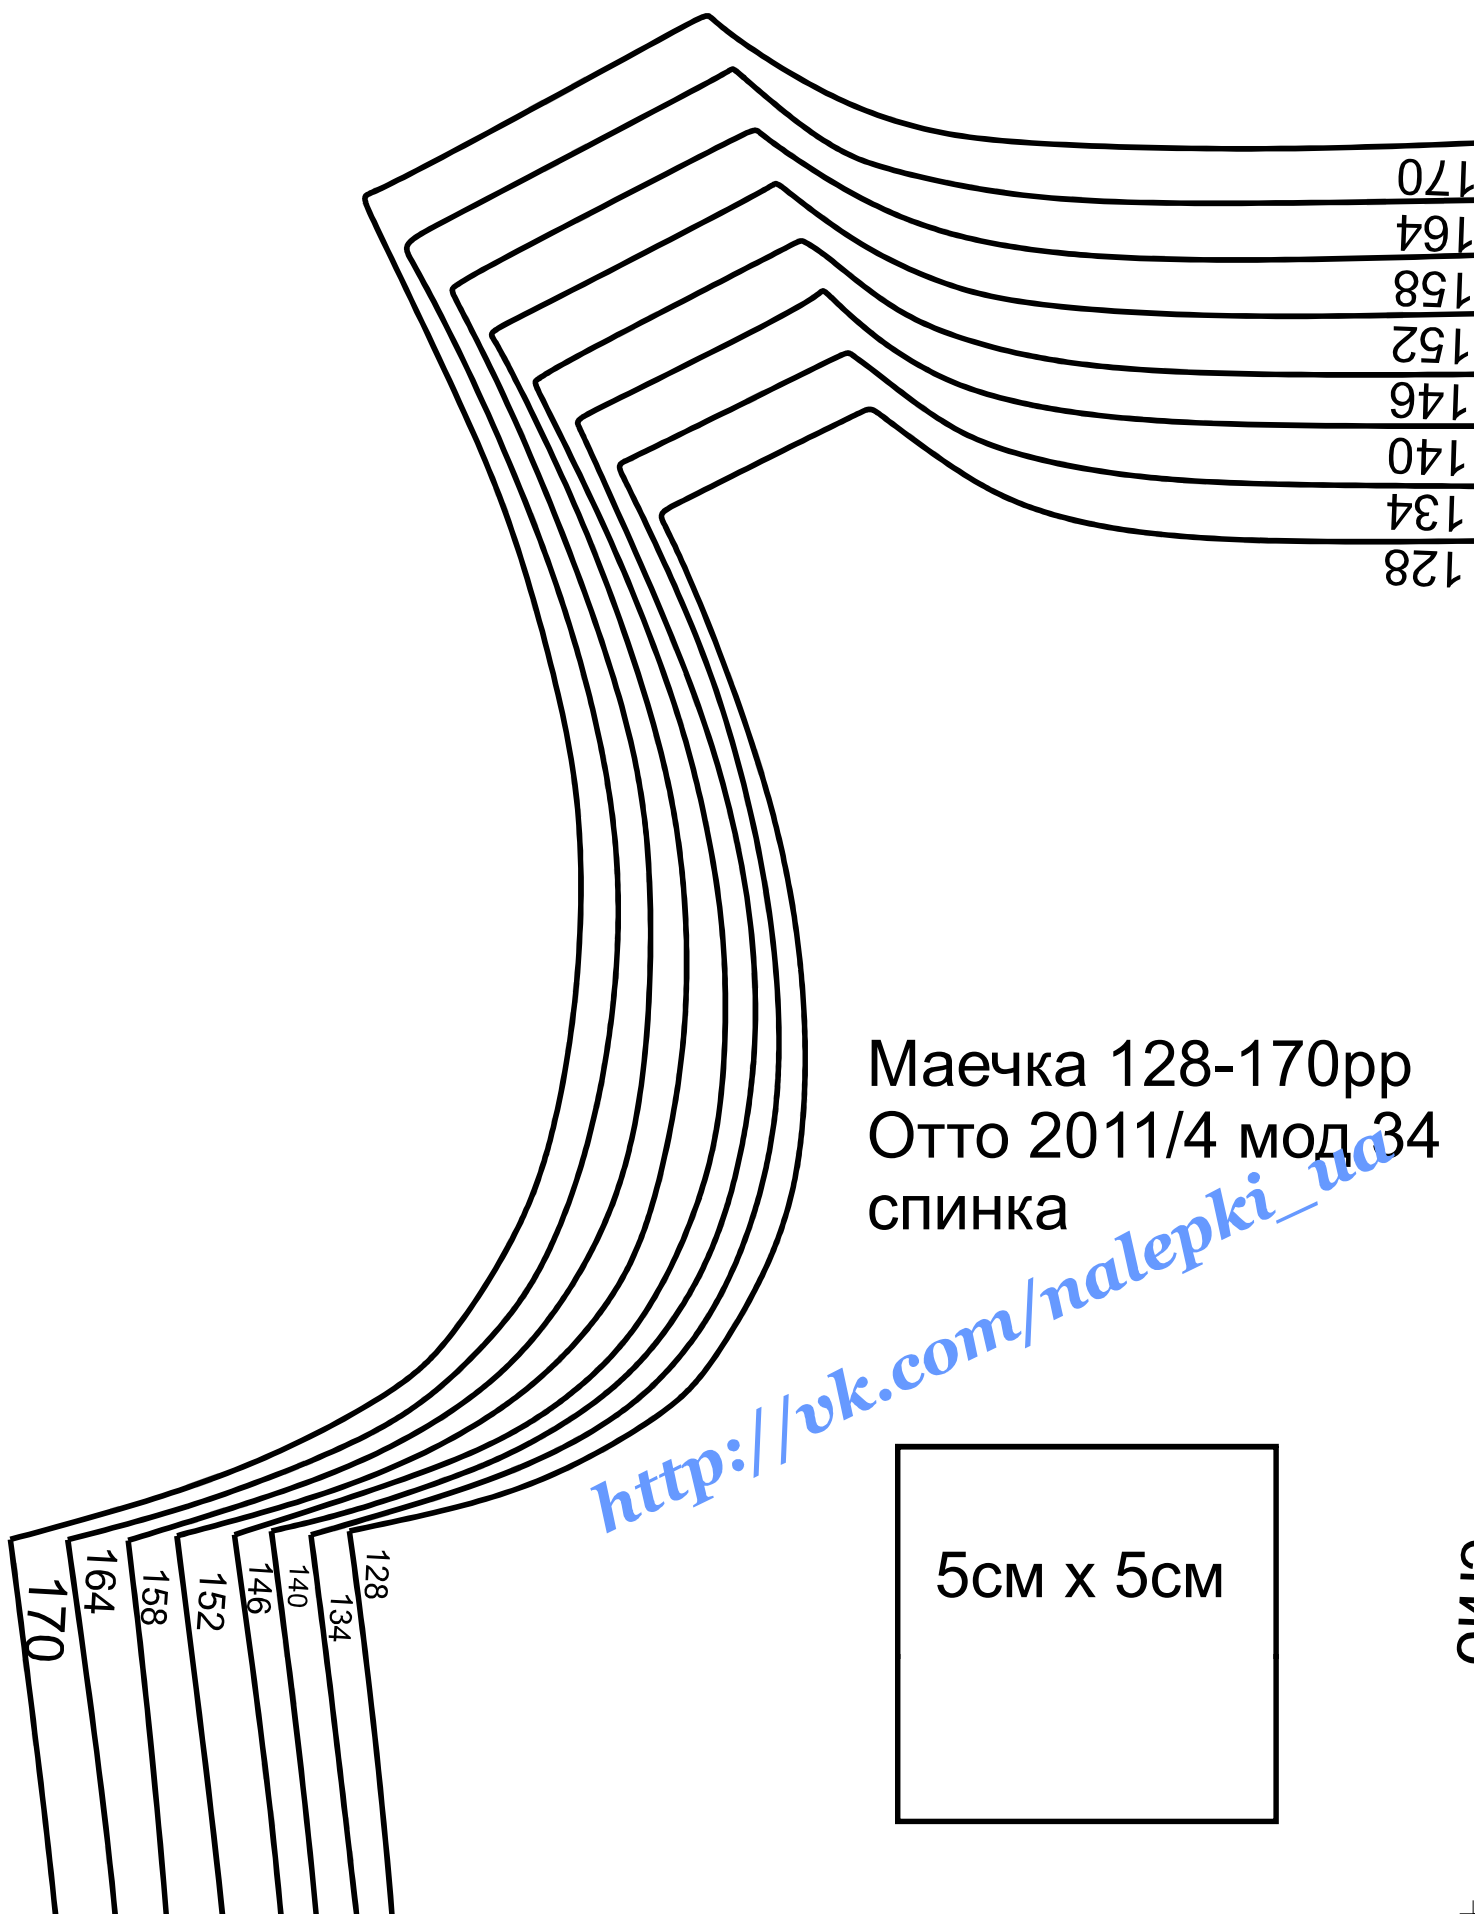

Маечка 128-170pp
Отто 2011/4 мод 34
СПИНКА

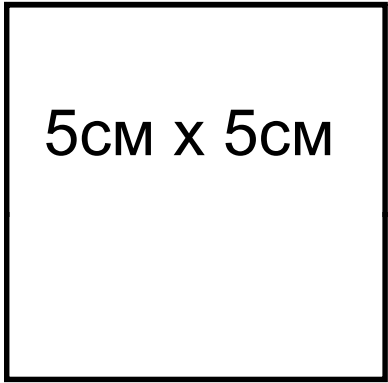

Спинка

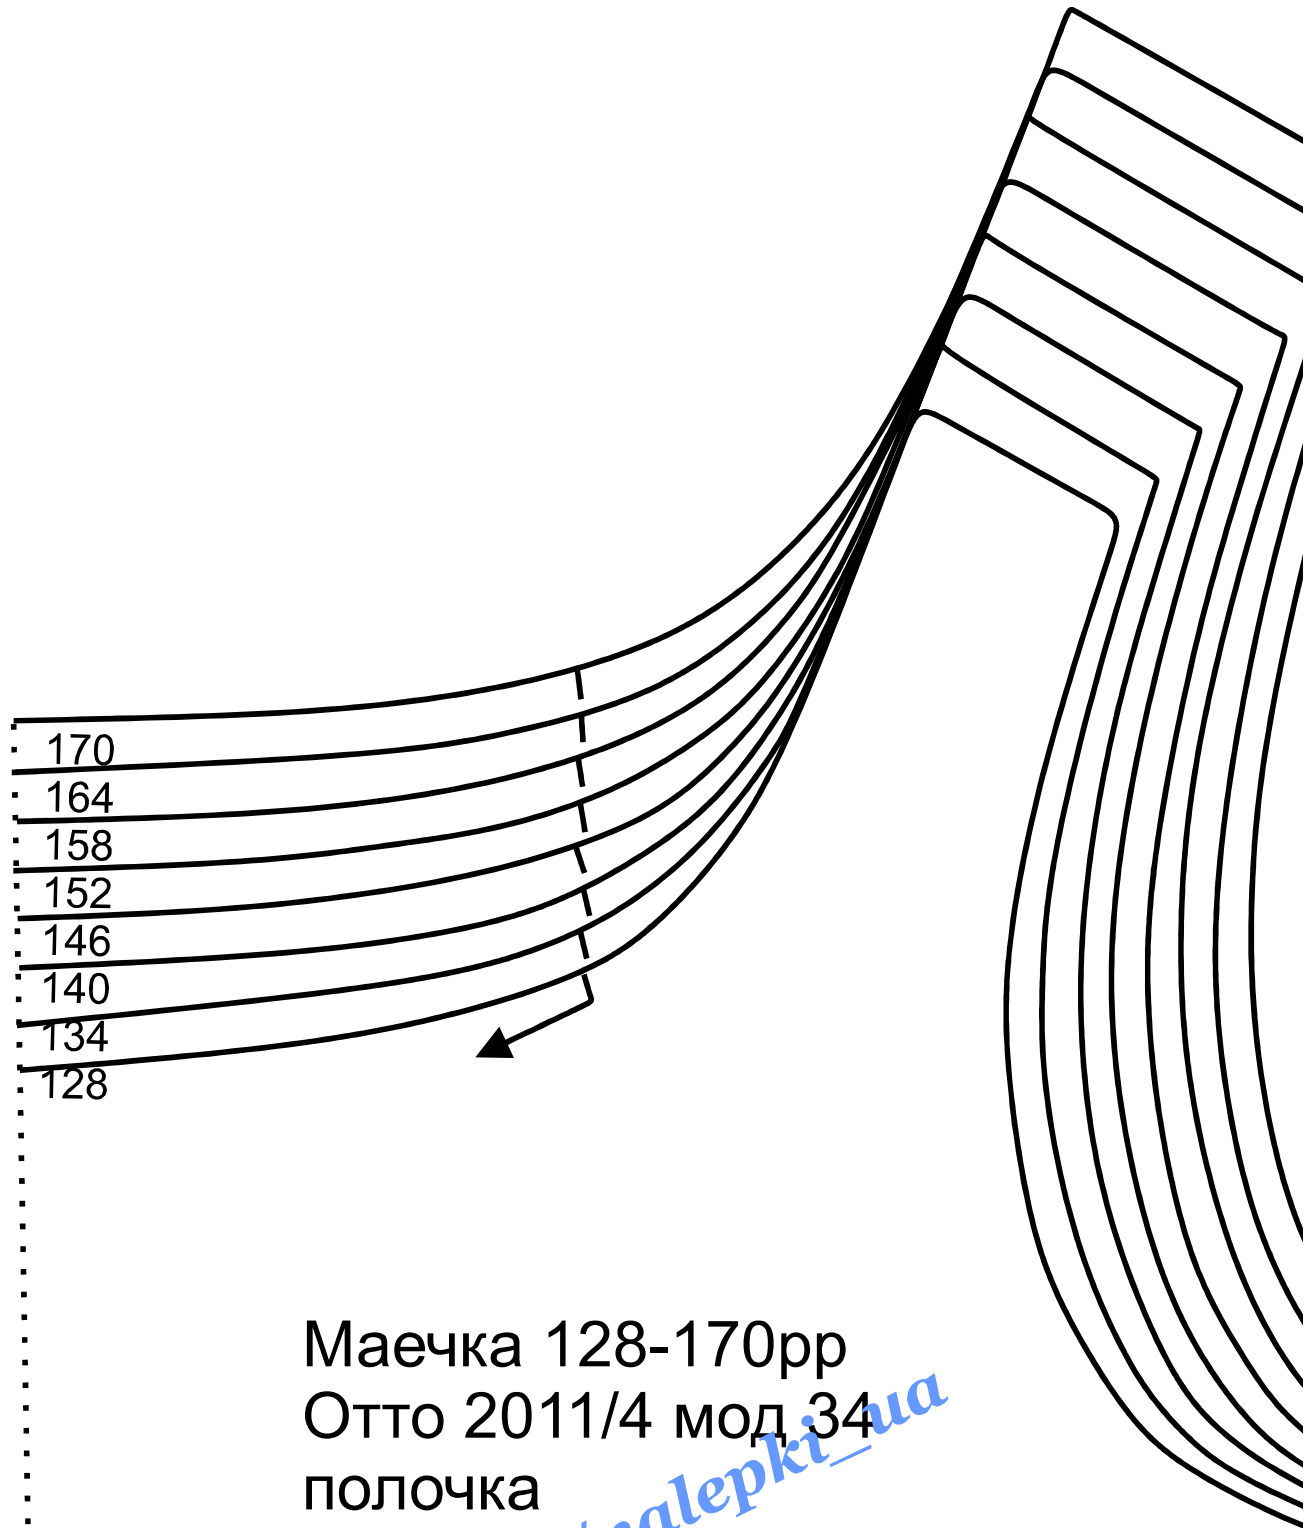


Маечка 128-170pp
Отто 2011/4 мод 34
полочка

http://vk.com/nalepki_ua

СГИБ

СГИБ

(3, 1)

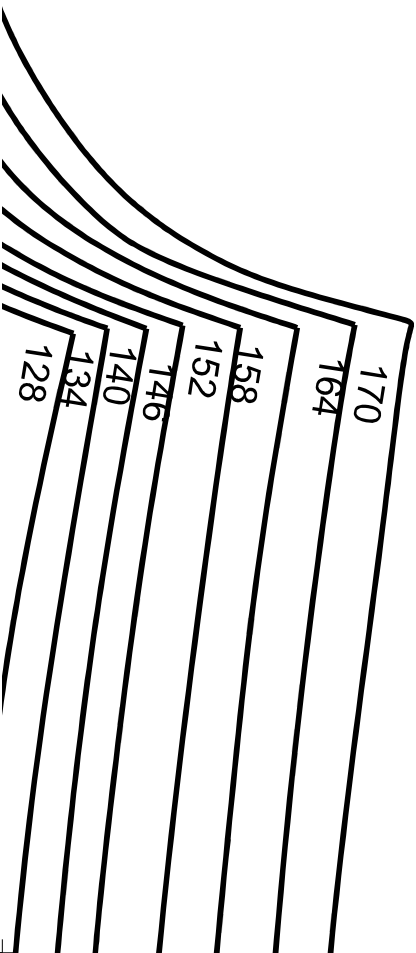

128


134


140

146

152

158

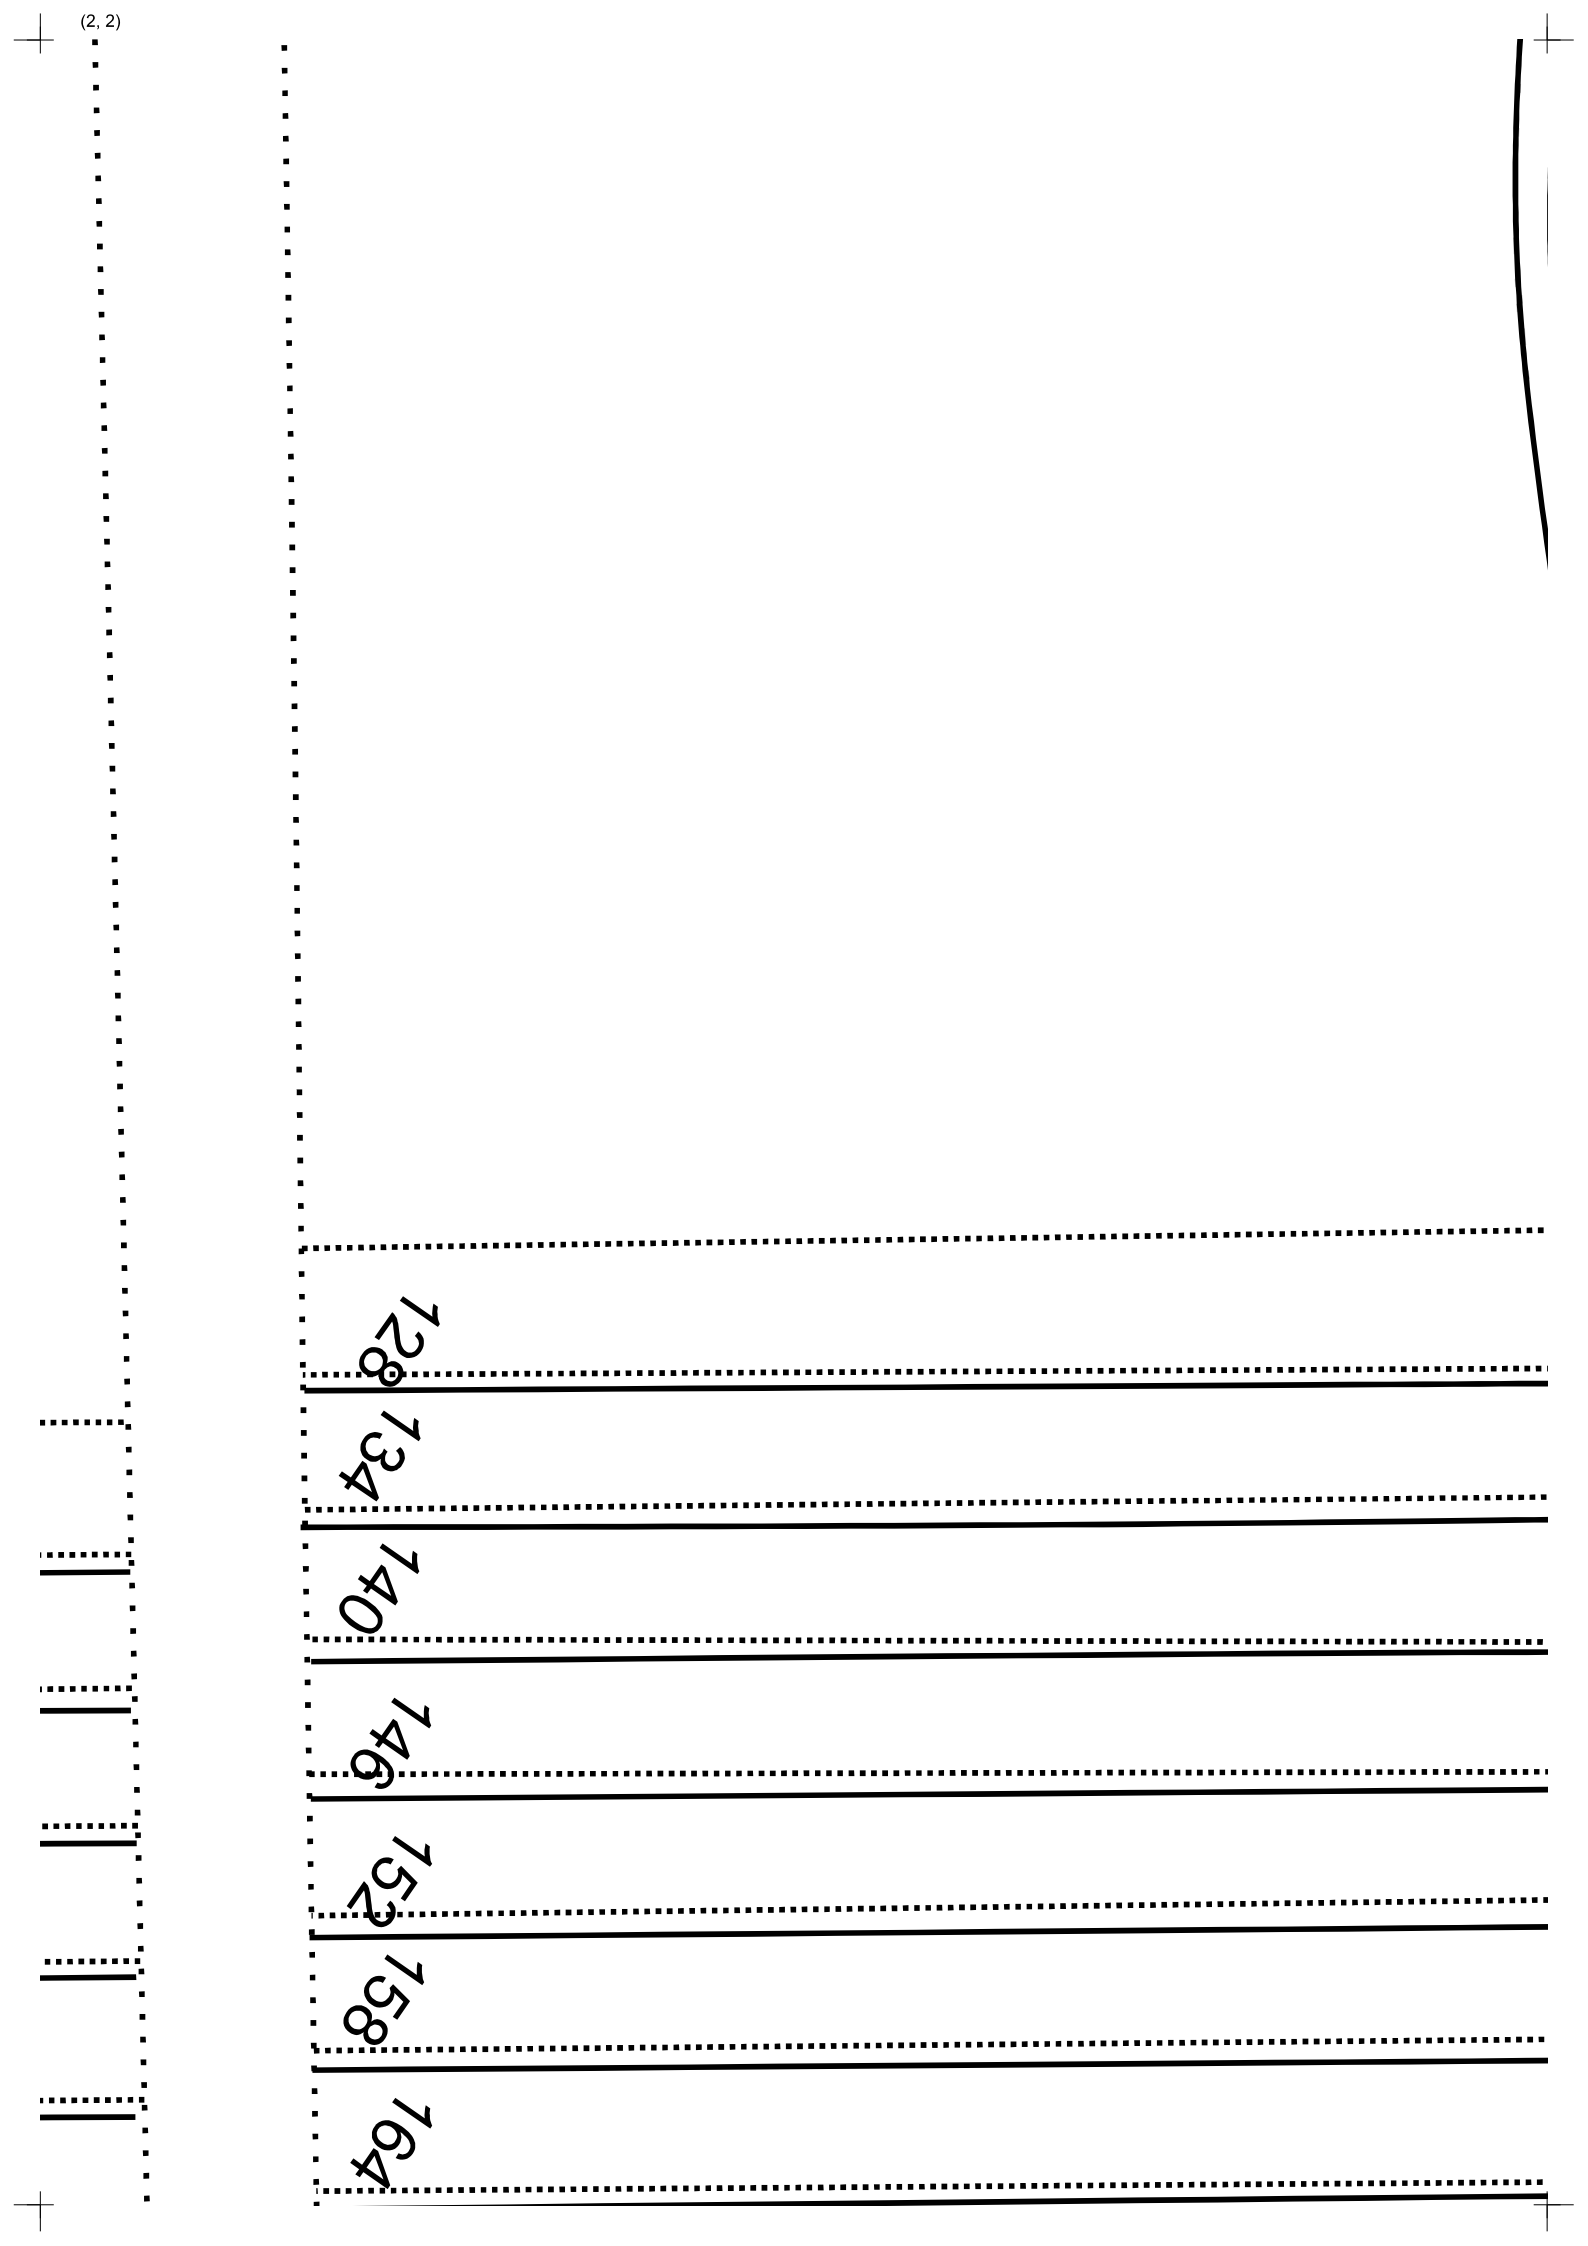

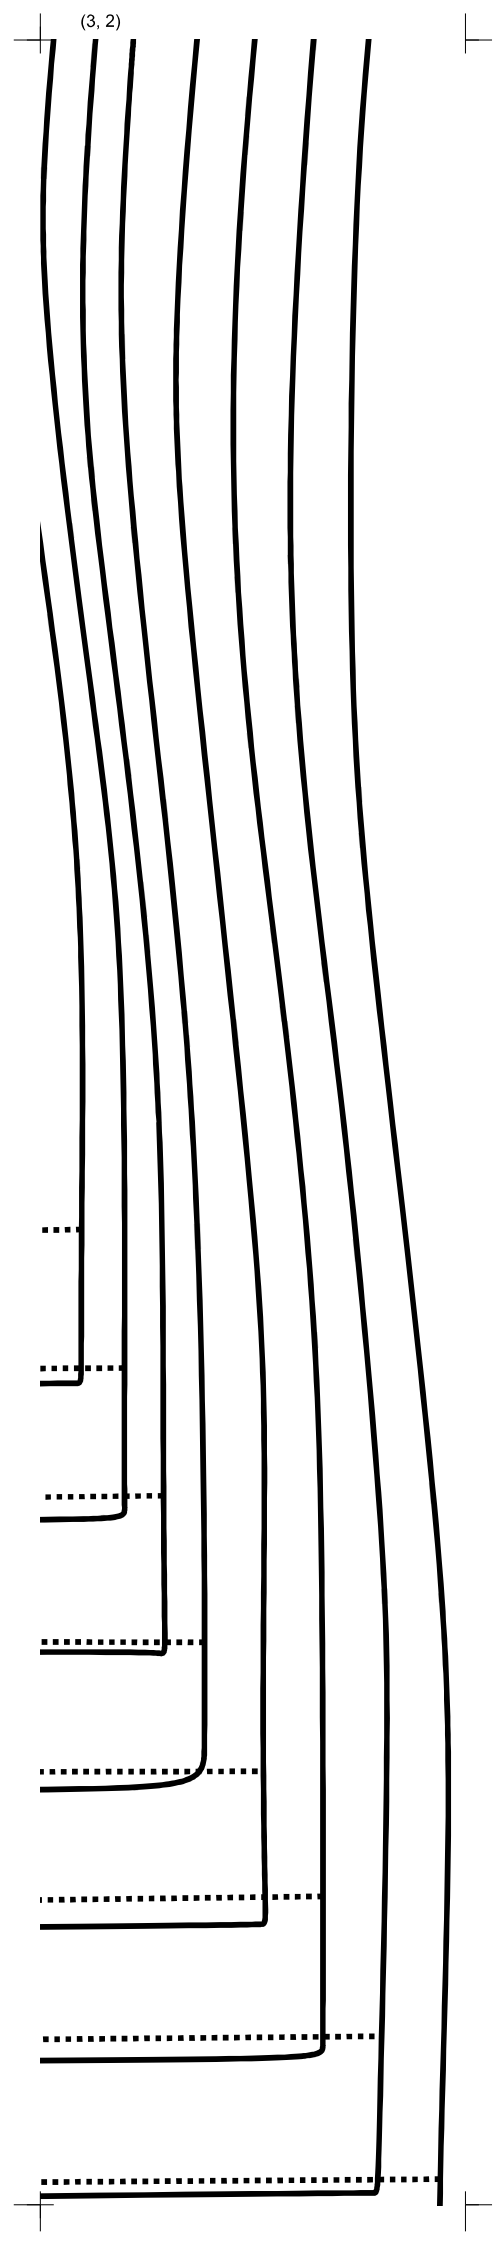

(1, 3)

164

170

