


Shoulder bag

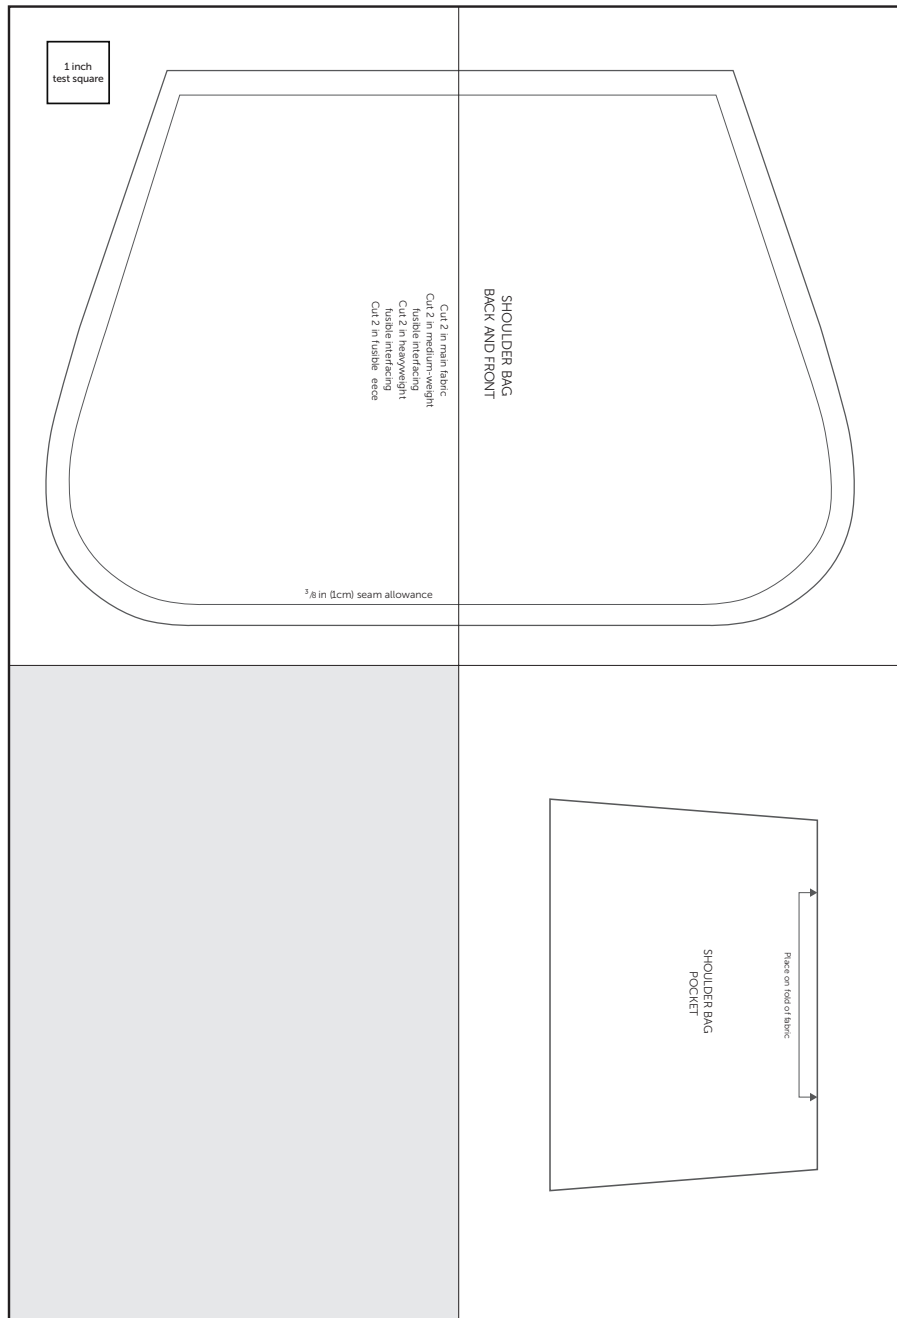

1

1 inch
test square

Cut 2 in main fabric
Cut 2 in medium-weight
fusible interfacing
Cut 2 in heavyweight
fusible interfacing
Cut 2 in fusible fleece

$\frac{3}{8}$ in (1cm) seam allowance




2



SHOULDER BAG
BACK AND FRONT

3

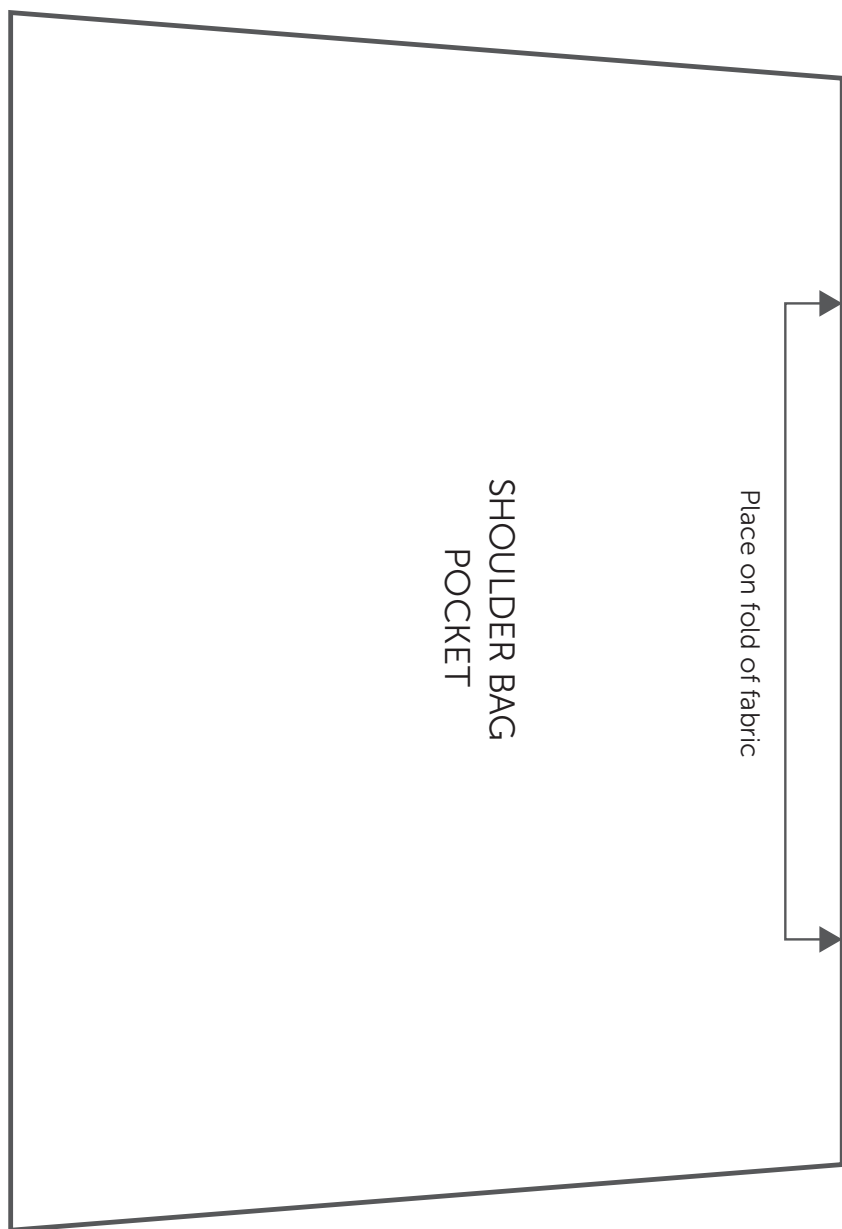

Place on fold of fabric

SHOULDER BAG
POCKET