



KWIK-SEW®



Pattern 3595
Sizes: XS-S-M-L-XL

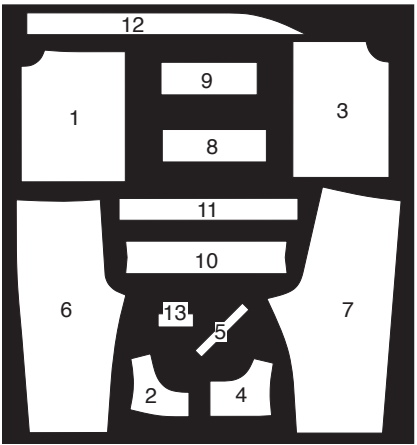

1. Top, Front View A and B
2. Top, Front Yoke View A and B
3. Top, Back View A and B
4. Top, Back Yoke View A and B
5. Top, Armhole Binding View A and B
6. Pants, Front View A and B
7. Pants, Back View A and B
8. Top, Front Band View A
9. Top, Back Band View A
10. Pants, Band View A
11. Top, Front Ruffle View B
12. Top, Back Ruffle View B
13. Top, Back Interfacing View B

For View A, use pattern pieces 1 through 10.

For View B, use pattern pieces 1 through 7, 11, 12 and 13.

HOW TO USE KWIK-SEW MULTI-SIZE PATTERN

Pattern includes five sizes and the lines are color coded for the different sizes. Pattern is made to fit specific body measurements with ease allowed for comfort and style. To select pattern size, compare your body measurements to those listed on the back of the pattern envelope and choose the size that is closest to your measurements. Select the pattern pieces for the view you have chosen. Press pattern pieces with a dry iron and cut out the paper pattern pieces, following the view and the color coding for the size you have chosen. Check for correct length and make any necessary adjustments on pattern pieces before placing them on fabric for cutting.

CUTTING Preshrink fabric if necessary. Fold fabric double, right sides together, unless otherwise indicated in the layouts. Place pattern pieces on wrong side of fabric, following the layout for size, view and fabric width. If placing pattern pieces on single layer of fabric, place fabric right side up. Any adjustments made on the pattern can change the position of the pattern pieces, in this case, use the layout as a guide. Layouts are shown for fabric with nap, one-way design or shading, place all pattern pieces with the arrow on top of the grain line in the same direction. Follow arrows for correct grain, placing ends of grain line an equal distance from the selvage. Hold pattern pieces in place with weights or pins. Cut out pattern pieces, using scissors or rotary cutter. Before removing the pattern pieces from fabric, transfer all construction lines, dots and notches to fabric. The easiest way to mark notches, center front, center back and fold lines is to make tiny clips on the seam allowances. Or, mark with chalk or water soluble pen. If marking is needed on right side of fabric, mark with pins or hand basting stitches. Label pattern pieces on wrong side with tape.

LAYOUT CODE

Fabric	Pattern piece with the printed side of pattern up	Pattern piece with the printed side of pattern down


If a pattern piece is marked "Place on Fold" and is shown in the following manner, cut all the other pattern pieces first, allowing fabric where the shaded half is shown. Then fold fabric and place the piece on the fold and cut.




Fold

FABRIC 60" (152 cm) WIDE


VIEW A All Sizes

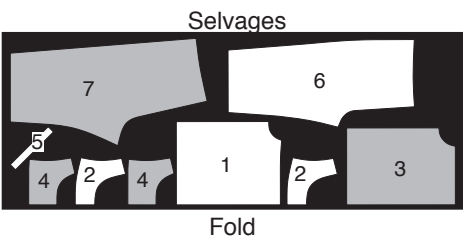


VIEW A CONTRAST Sizes: XS-S-M-L



VIEW A CONTRAST Size: XL




VIEW B All Sizes

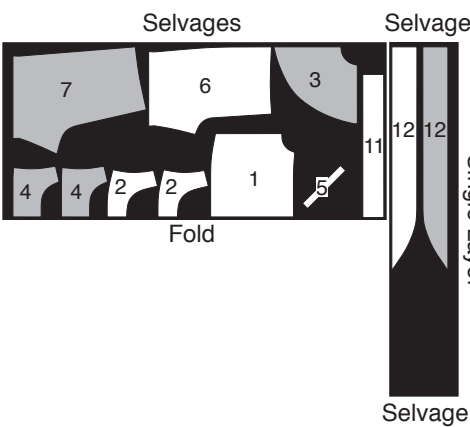


FABRIC 45" (115 cm) WIDE


VIEW A Sizes: XS-S-M

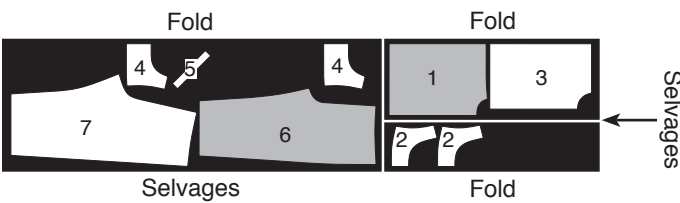


VIEW A Sizes: L-XL

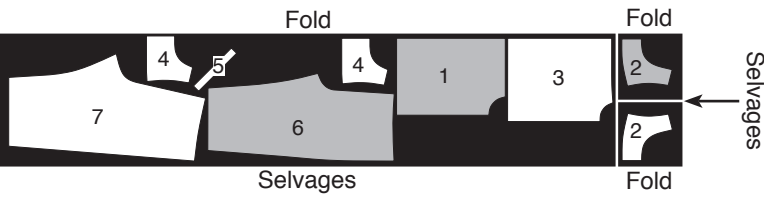


VIEW A CONTRAST All Sizes



VIEW B Sizes: XS-S

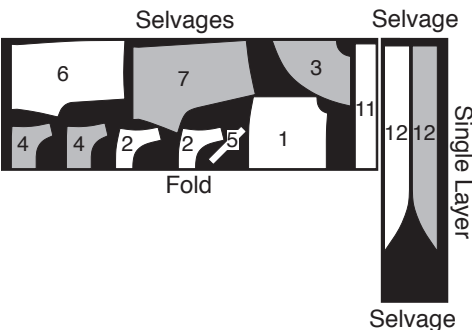

VIEW B Sizes: M-L-XL

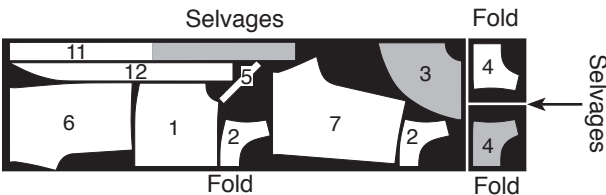

SEWING PROCEDURES

Use an all purpose thread and a size 12/80 sewing machine needle for light to medium weight fabric and a size 12/80 or 14/90 for medium to heavyweight fabric.

Standard sewing machine. Sew the seams with a medium length straight stitch. Overcast seam allowances together, unless otherwise stated in the instructions, and finish raw edges of facings, hems and single layers of fabric, using a wide zigzag stitch or a three-step zigzag stitch.

Serger (overlock) machine. Sew the seams and finish the raw edges of facings, hems and single layers of fabric. Guide fabric, being sure that only the 1/4" (6 mm) seam allowance is used.


Understitching keeps facings and bindings from rolling to outside of garment. Fold the seam allowances toward the facing and stitch on facing close to seam through facing and seam allowances.

Easing and gathering one or two rows of machine stitching on the seam allowances with a longer stitch length and looser thread tension. Stitch lengths vary from 6 to 10 stitches per inch (3 - 5 per cm), use a shorter stitch length for sheer or lightweight fabric and a longer length for medium to heavyweight fabrics.

SEAM ALLOWANCES – 1/4" (6 mm) seam allowances are included for all seams, unless otherwise specified in the following instructions.

PRESSING


Steam press each seam as sewn. Press seams to one side, unless otherwise specified in the following instructions. Clip seam allowances where necessary so seams are flat.



CLIP INNER CURVES



NOTCH OUTER CURVES



CLIP CORNERS

FABRIC ILLUSTRATION CODE


Right Side	Wrong Side	Interfacing

VIEW A


1/4" (6 mm) seam allowances included.

Top



1. Stitch front yoke to back yoke, right sides together, at shoulder seams. Press seam allowances open. Repeat for other yoke.





Pin yokes, right sides together, and stitch neckline. Clip curved seam allowances.




Understitch seam allowances to inside yoke (see Understitching in Sewing Procedures). Turn yoke right side out and press.




2. Pin armholes of inside and outside yokes, **from one side of garment**, right sides together, with armholes from other side in between. Stitch armhole (see illustration).

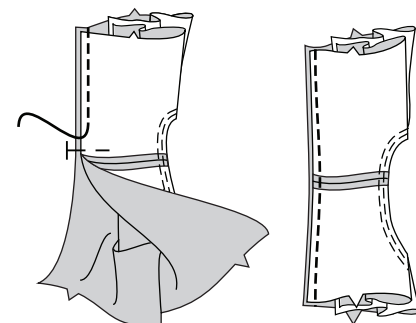


Turn right side out.




Repeat for other armhole. Press.



3. Sew gathering stitches on front and back at yoke seams between notches, on seam lines and again in the middle of seam allowances.

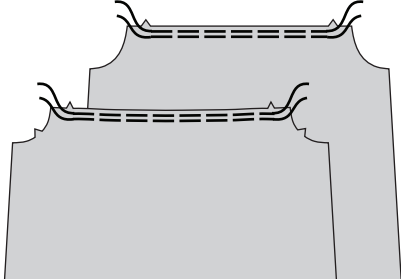



4. Stitch front to back, right sides together, at sides seams.




5. Fold each armhole binding lengthwise, wrong sides and raw edges together, and press.




Pin binding to armhole, right sides and raw edges together, matching notches on front and notch to side seam, and stitch. Clip curved seam allowances. Understitch seam allowances to binding (see Sewing Procedures).





Trim seam allowances close to stitches. Fold binding to wrong side and stitch close to inner edge of binding. Repeat for other armhole.





6. Pin outside front and back yokes to front and back, right sides together, at yoke seams, matching notches, and armhole edges. Pull up gathering stitches to fit and adjust gathers evenly. Stitch yoke seams.

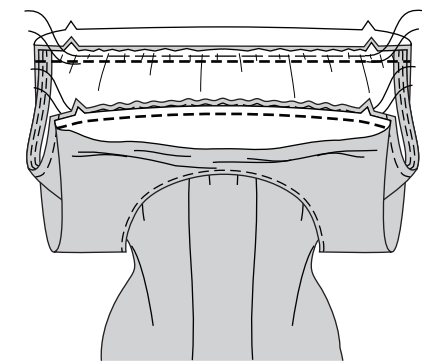

Press yoke seam allowances toward yoke. Fold under raw edges of inside yoke and pin to seam allowances covering stitches. To secure inside yoke, on right side, stitch on yoke close to seam and be sure to catch inside yoke with stitches.

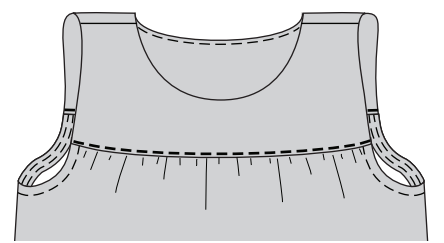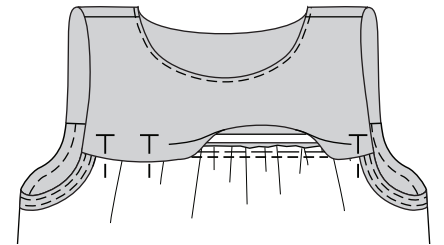



7. Stitch front band and back band, right sides together, at side seams. Press seam allowances open.

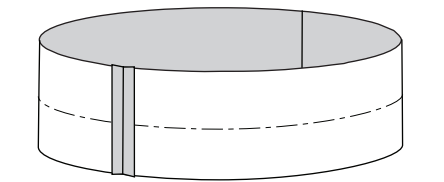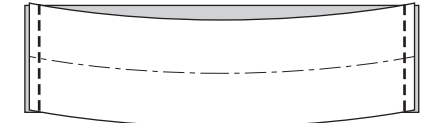

Fold band on fold line, wrong sides and raw edges together, and press.




Pin band to right side of top, at bottom edge, with raw edges together, matching center fronts, center backs, and side seams. Stitch. Press seam allowances toward top.

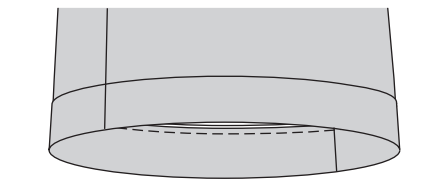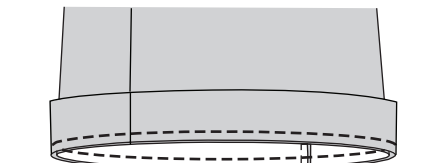


Pants


8. Stitch fronts, right sides together, at center front seam. Stitch backs, right sides together, at center back seam, matching notches.

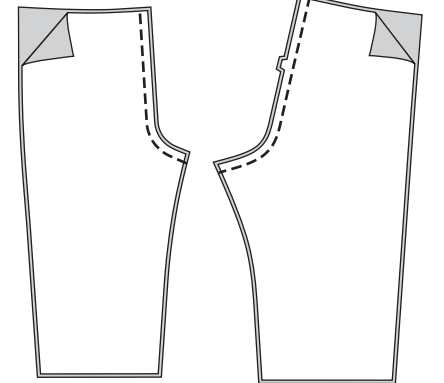

9. Pin front to back, right sides together, at outside leg seams and inside leg seams, matching center front seam to center back seam. Stitch.

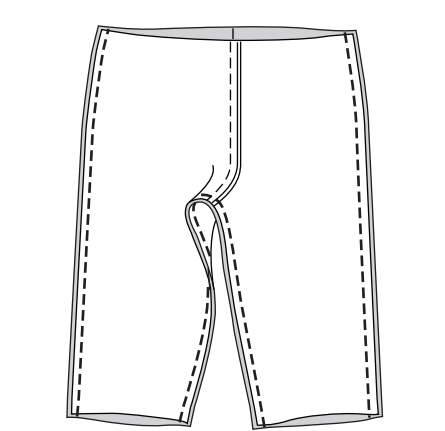


10. Overcast waist edge. To make casing, fold 3/4" (2 cm) to wrong side and press.


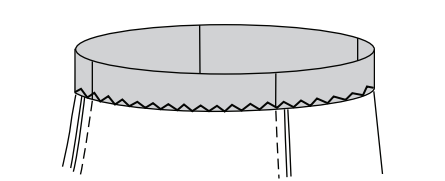


11. Cut one piece of 3/8" (1 cm) wide elastic the following length:
XS - 20" (51 cm)
S - 22 1/2" (57 cm)
M - 25" (63 cm)
L - 28" (71 cm)
XL - 31 1/2" (80 cm)




Overlap ends of elastic 3/8" (1 cm) and stitch together.





12. Place elastic inside casing, with edge of elastic along crease. Using a zipper foot, stitch close to edge of elastic. As you sew, pull elastic from the stitched casing to keep fabric flat for sewing. Distribute gathers evenly. To keep elastic from rolling, stitch across the width of elastic at center front, center back, and side seams.

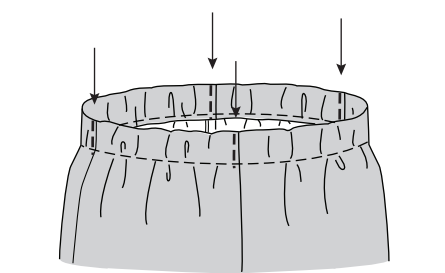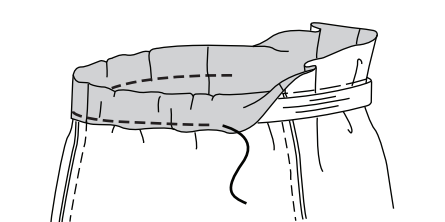

13. Fold each band, right sides together, and stitch inside leg seam. Press seam allowances open. Fold bands on fold line, wrong sides and raw edges together, and press.

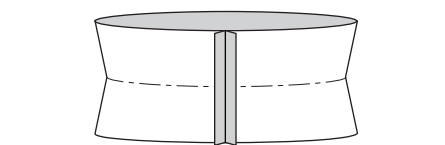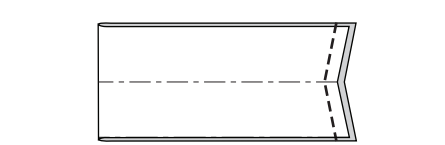

Pin band to right side of leg, at bottom edge, with raw edges together, matching inside leg seams. Stitch. Press seam allowances toward pants.

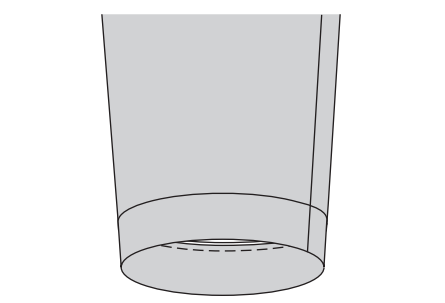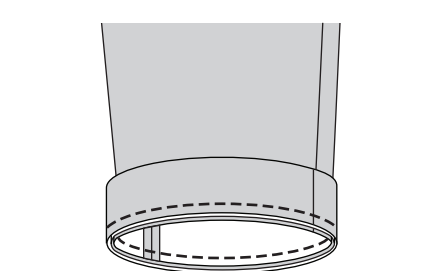

Congratulations on completing your **KWIK•SEW** sewing project!




Please take a moment to share your comments with our design studio by visiting: www.kwiksew.com/survey

VIEW B


1/4" (6 mm) seam allowances included.

Top


1. Cut two pieces of fusible interfacing (pattern piece 13) for back yokes. Fold each back yoke at back edge, wrong sides together, and press. Unfold back yokes, place interfacing along creases as shown, and fuse in place. Interfaced side of yoke will be inside yoke.

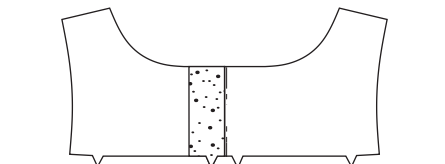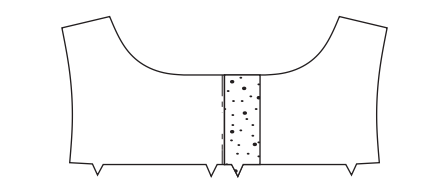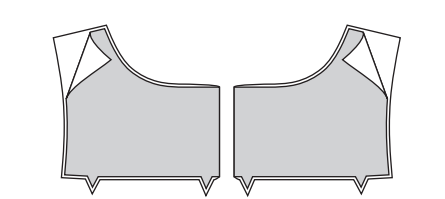


2. Pin back yokes to one front yoke, right sides together, at shoulder seams and stitch.

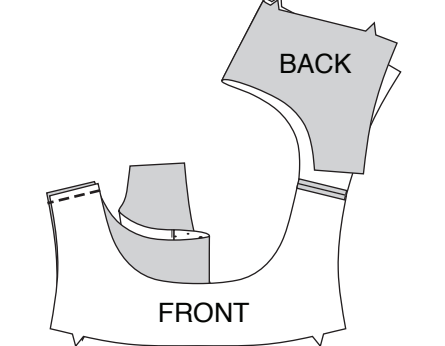


Pin other front yoke to remaining shoulder seams on back yokes, right sides together, and stitch. Press shoulder seam allowances open.

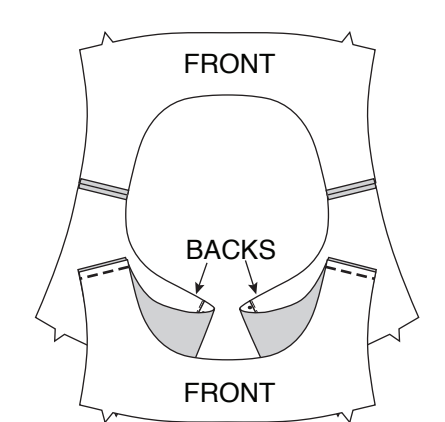



3. Fold back yokes along back edges, right sides together, and pin neckline, matching shoulder seams. Stitch neckline. Clip seam allowances.

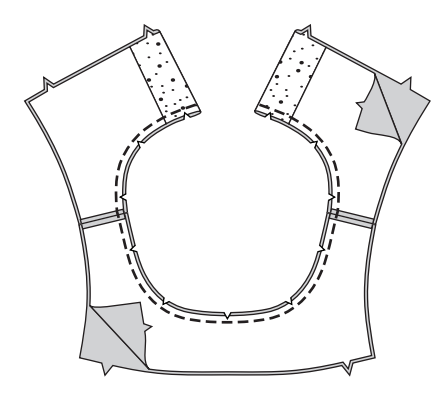


4. Pin armholes of inside and outside yokes, right sides together. Stitch armholes. Clip curved seam allowances.

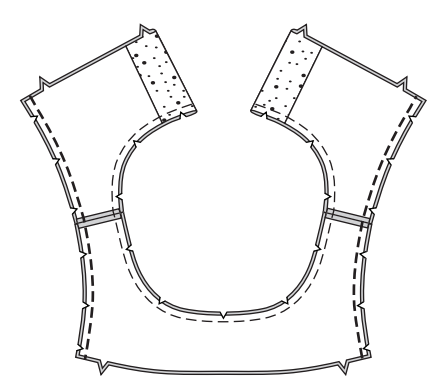


Turn right side out by pulling back yoke through shoulder area to front, one side at a time. Press neckline and armholes.

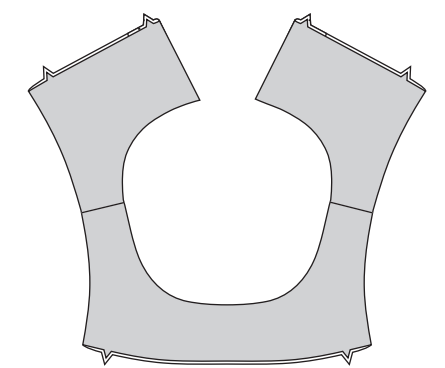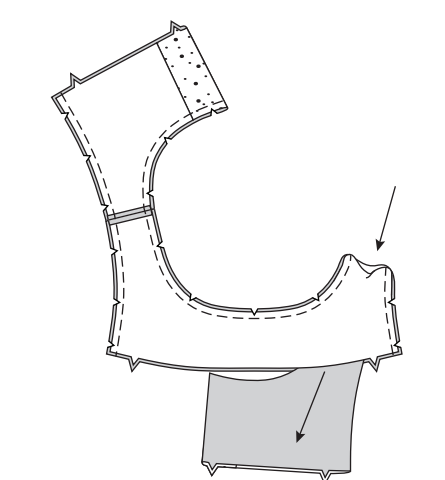

5. Sew gathering stitches on front and backs on yoke seams between notches, on seam line and again in the middle of seam allowances (see Easing and gathering in Sewing Procedures).

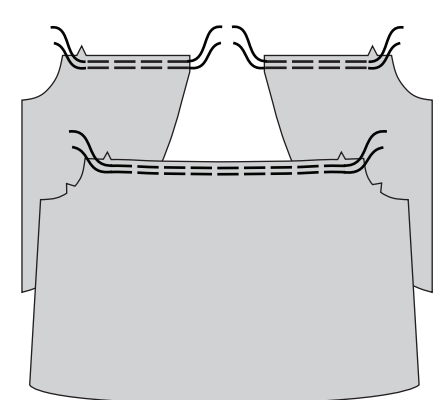


6. Pin backs to front, right sides together, at side seams. Stitch.

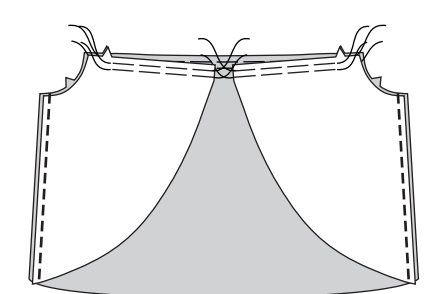


7. Continue, following View A step 5.


8. Stitch back ruffles to front ruffle, right sides together, at side seams.

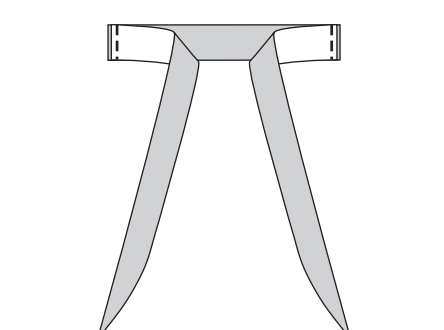


On outer edge, fold 1/4" (6 mm) hem to wrong side and press. Fold under raw edge to form a double hem, press and pin. Stitch close to edge of hem.

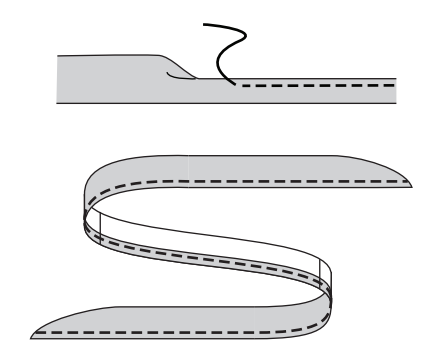


Sew gathering stitches on ruffle seam edge on seam line and again in the middle of seam allowance.

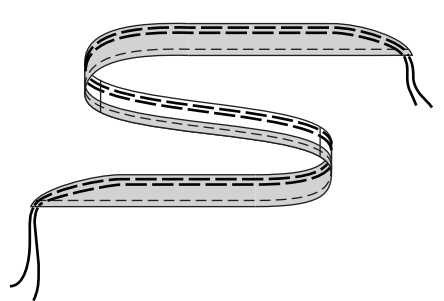




9. Pin ruffle to bottom and back edges of top, right sides together, at ruffle seam, matching center front, side seams, and edges even at back yoke seam. Pull up gathering stitches to fit and pin. Stitch.

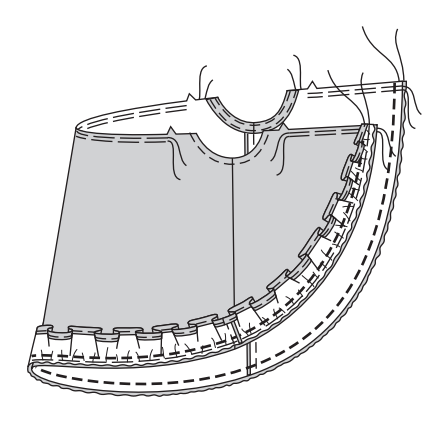


10. Pin outside front yoke to front, right sides together, at yoke seam, matching center front, notches, and armhole edges. Pin outside back yokes to backs, right sides together, matching notches and edges of ruffle at center back notches. Pull up gathering stitches to fit and distribute gathers evenly. Stitch.

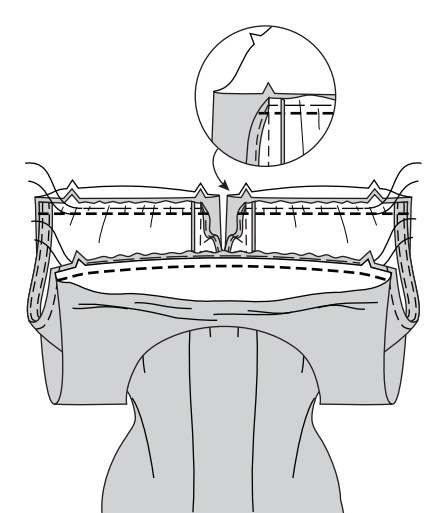


Press yoke seam allowances toward yokes. Fold under raw edges of inside yokes and pin to seam allowances, covering stitches. To secure inside yokes, on right side, stitch on yokes close to seams and be sure to catch inside yoke with stitches; on backs, stitch to back edges.

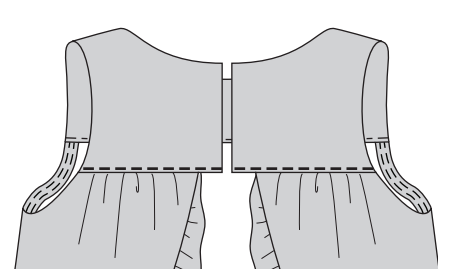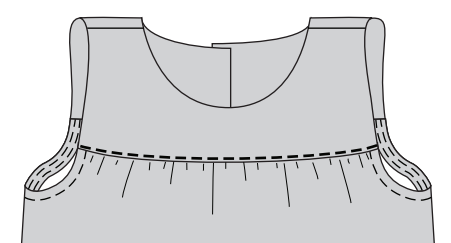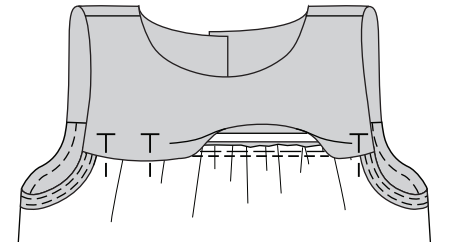

11. Mark two horizontal buttonholes on left back yoke 1/2" (1.3 cm) from back edge. Mark top buttonhole 5/8" (1.5 cm) below neckline edge and bottom buttonhole 5/8" (1.5 cm) above yoke seam. Make buttonholes.

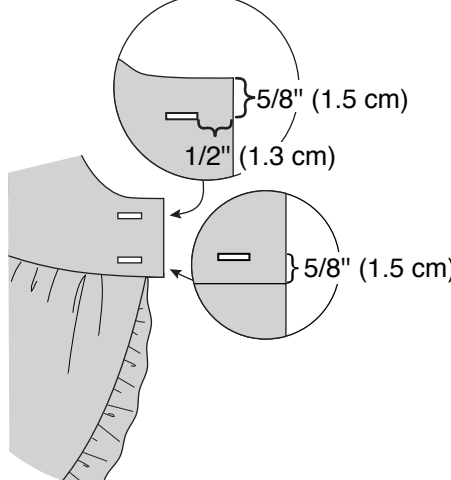


Sew buttons to right back along center back to match buttonholes.

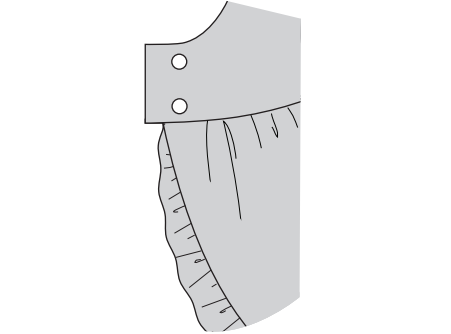

Shorts

12. Sew shorts, following View A pants, steps 8 through 12.

13. Overcast bottom edges of legs, fold 1" (2.5 cm) hems to wrong side and press. Stitch close to edge of hems.

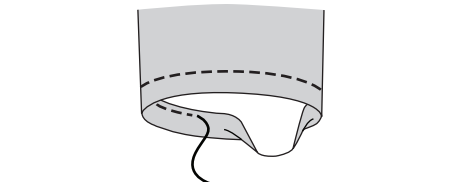

Congratulations on completing your **KWIK•SEW** sewing project!

Please take a moment to share your comments with our design studio by visiting: www.kwiksew.com/survey

If you purchased this pattern without the enclosing envelope, you should be aware that this pattern is stolen property. It was reported "unsold and destroyed" to KWIK•SEW®, and neither KWIK•SEW® nor the distributor has received any payment for this "stripped pattern."

©MMVIII KWIK•SEW® Pattern Co., Inc. All rights reserved. Protected under international copyright law. Commercial or industrial use prohibited unless there is a written agreement with KWIK•SEW® Pattern Co., Inc. This pattern or any part thereof may not be reproduced in any form or by any process without written permission from the copyright owner.

KWIK•SEW® Pattern Co., Inc. is not responsible for misprints or other errors, and in no event shall be liable for any damages whatsoever resulting from the purchase or use of this product.

Printed in the United States of America.