



Thank you for purchasing this Simplicity pattern.
We have made every effort to provide you with a high quality product

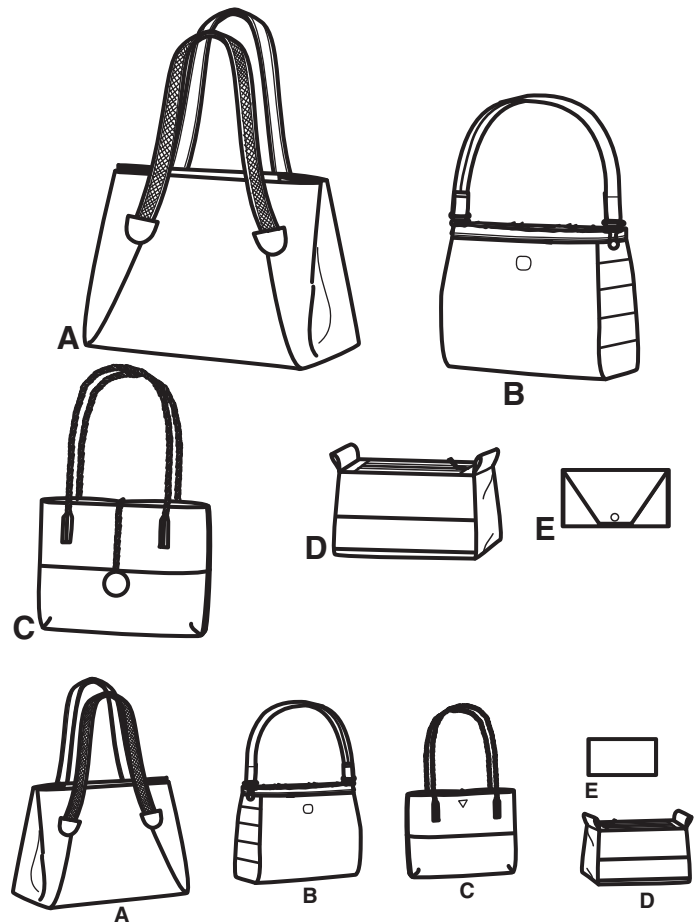

Sign-up for our **free** newsletter
today at **simplicity.com**

Cutting Layouts

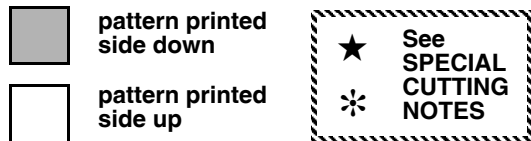

POSITION OF PATTERN PIECES MAY VARY SLIGHTLY ACCORDING TO YOUR PATTERN SIZE

General Directions For Cutting

PRE-SHRINK and iron all fabric.

FOR DOUBLE THICKNESS-Fold fabric with **RIGHT** sides together. Pin pattern to **WRONG** side of fabric.

FOR SINGLE THICKNESS-Pin pattern to **RIGHT** side of fabric.

★ If layout shows a piece extending past fold, cut out all pieces except piece that extends. Open out fabric to single thickness. Cut extending piece on **RIGHT** side of fabric in position shown.

✱ Mark small arrows along both selvages indicating direction of nap or design. Fold fabric crosswise with **RIGHT** sides together, and cut along fold. Turn one fabric layer around so arrows on both layers go in the same direction. Place **RIGHT** sides together.

A BAG: FRONT AND BACK


USE PIECE 1

FOR LINING FRONT AND BACK- FOLLOW SAME LAYOUT

FOR HANDLE PATCH- CUT FOUR OF PIECE 6 FROM LEATHER OR LEATHER-LIKE FABRIC REMNANT

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP




POCKET AND SIDE

USE PIECES 2 3

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP

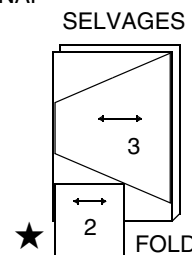


LINING POCKET, SIDE AND HANDLE

USE PIECES 2 3 4

CUT ONE OF PIECE 2

44" 45" OR 58" 60" (115CM OR 150CM)


WITH NAP



FUSIBLE FLEECE

USE PIECES 1 3


44" 45" (115CM)

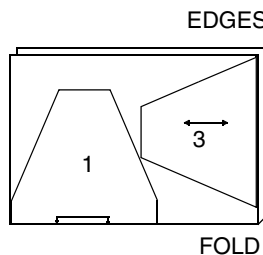

STABILIZER

USE PIECES 1 2 3 5

20" (51CM)

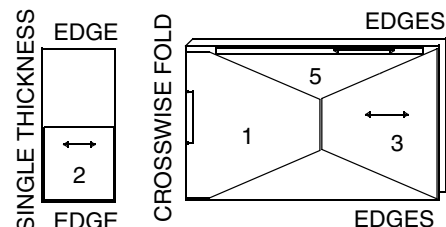


B BAG

USE PIECES 7 8

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP

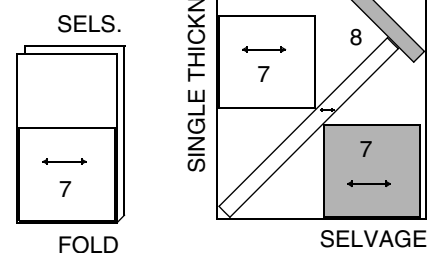

C BAG: UPPER FRONT AND BACK


USE PIECE 9

FOR SNAP DOT- CUT ONE OF PIECE 12 FROM FABRIC REMNANT

FOR SNAP DOT FACING- CUT ONE OF PIECE 13 FROM FELT REMNANT

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP




LOWER FRONT AND BACK

USE PIECE 10

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP




LINING

USE PIECE 11

44" 45" OR 58" 60" (115CM OR 150CM)


WITH NAP



FUSIBLE FLEECE

USE PIECES 9 10 13

44" 45" (115CM) EDGE

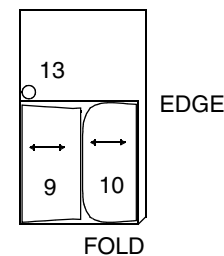

D BAG


USE PIECES 14 15 16

FOR LINING - FOLLOW SAME LAYOUT

DOT FOR ZIPPER PULL- CUT TWO OF PIECE 17 FROM LEATHER OR LEATHER-LIKE FABRIC REMNANT

44" 45" OR 58" 60" (115CM OR 150CM)


WITH NAP

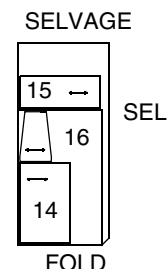

INTERFACING

USE PIECES 14 15 16

20" TO 25" (51CM TO 64CM) FUSIBLE



E BAG: FRONT AND BACK

USE PIECE 18

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP



CONTRAST FLAP

USE PIECE 19

44" 45" OR 58" 60" (115CM OR 150CM)

WITH NAP




LINING AND SNAP DOT

USE PIECES 20 22

44" 45" OR 58" 60" (115CM OR 150CM)


WITH NAP

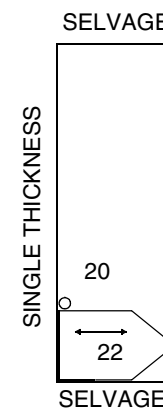


INTERFACING

USE PIECES 18 19 21

20" TO 25" (51CM TO 64CM) FUSIBLE




22 pieces given

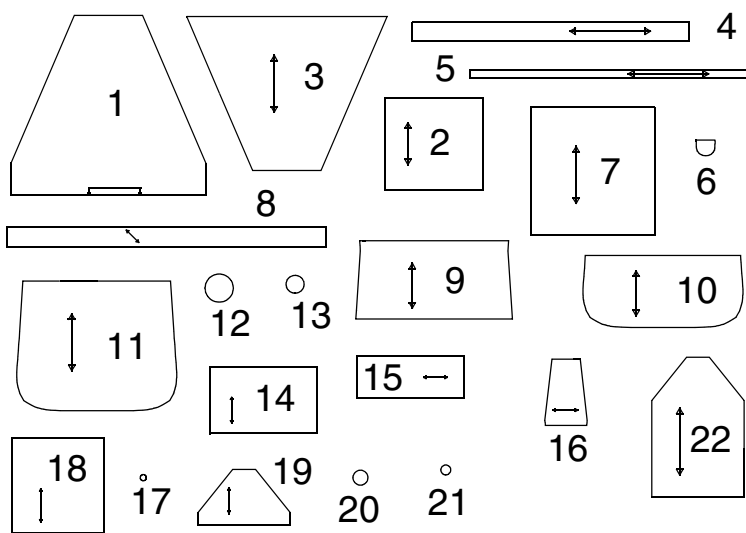

- | | |
|-----------------------------|-----------------------|
| 1-FRONT AND BACK -A | 12-SNAP DOT -C |
| 2-POCKET -A | 13-SNAP DOT FACING -C |
| 3-SIDE -A | 14-FRONT AND BACK -D |
| 4-HANDLE -A | 15-BOTTOM -D |
| 5-HANDLE STABILIZER -A | 16-SIDE -D |
| 6-PATCH -A | 17-DOT -D |
| 7-FRONT AND BACK -B | 18-FRONT AND BACK -E |
| 8-BAND -B | 19-FLAP -E |
| 9-UPPER FRONT AND BACK -C | 20-SNAP DOT -E |
| 10-LOWER FRONT AND BACK -C | 21-DOT INTERFACING -E |
| 11-FRONT AND BACK LINING -C | 22-LINING -E |

Sewing Directions

FABRIC KEY



Read **General Directions** before you begin.

With **RIGHT** sides together, stitch 1/2" (1.3cm) seams and press all seams open, unless otherwise indicated.


Sewing procedures **ITALICIZED** in Sewing Directions are defined below:

FLEECE, INTERFACING, STABILIZER -Pin fusible interfacing to **WRONG** side of project sections as instructed in Sewing Directions. Fuse in place, following manufacturer's directions.

PATTERN PIECES WILL BE IDENTIFIED BY NUMBER THE FIRST TIME THEY ARE BEING USED.

BAG A

1. Apply **STABILIZER** to front and back (1) and side (3) sections. With **RIGHT** sides together, stitch sides to front and back, matching small dots.
2. Fuse handle stabilizer (5) to **WRONG** side of handle (4), centering it over handle and following manufacturer's directions. Press long edges of handle toward center over stabilizer.
3. On **OUTSIDE**, stitch braid trim to handle over raw edges, stitching close to both long edges.
4. Turn bag **RIGHT** side out; press. On **OUTSIDE**, pin handles to bag, placing ends at lower large dots and edge of handle along seam. Stitch handle in place close to both long edges between large dots, as shown. Glue patch (6) over ends of each handle. Allow glue to dry.

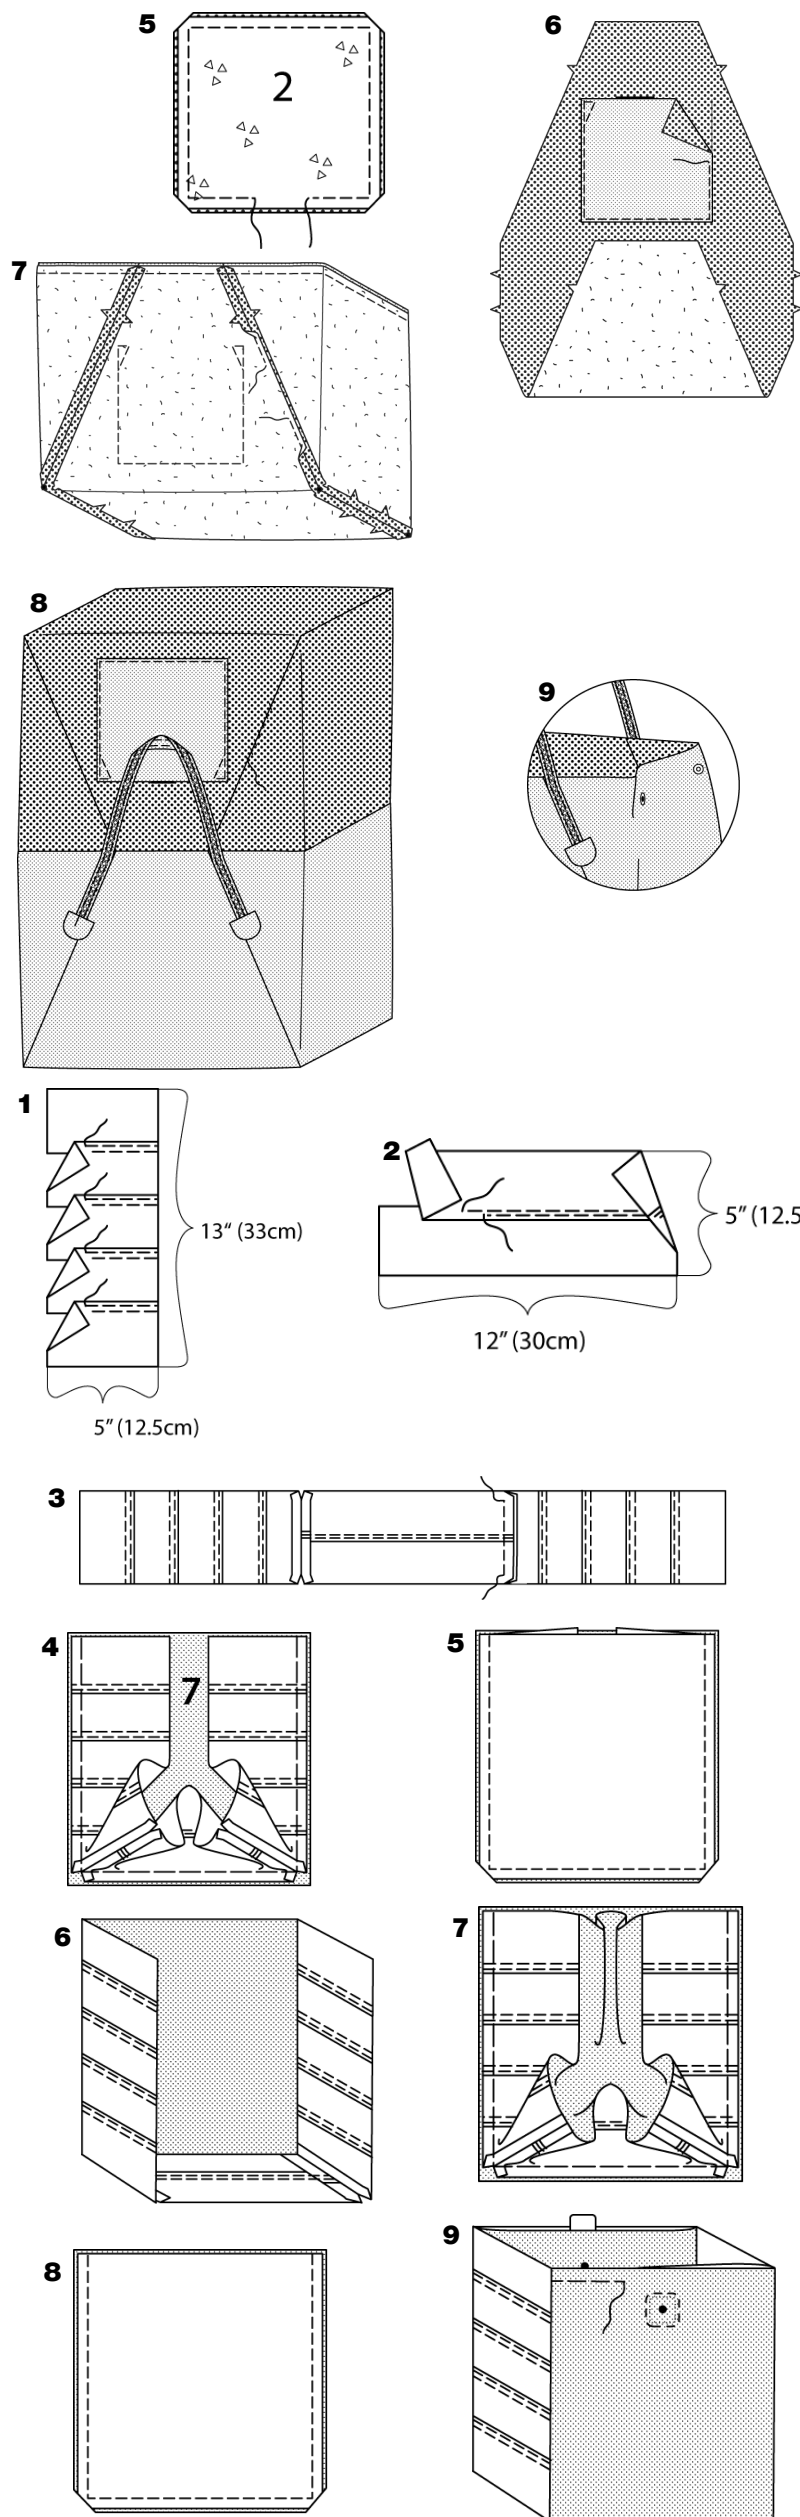

5. Apply **STABILIZER** to pocket (2). With RIGHT sides together, stitch lining to pocket, leaving an opening in lower edge for turning. Trim seams and corners.

6. Turn pocket RIGHT side out; press, pressing under opening edges. Apply **FLEECE** to front and back lining. On OUTSIDE, pin pocket to lining along pocket line. Stitch pocket close to side and lower edges, reinforcing upper corners, as shown.

7. Apply **FLEECE** to side lining sections. Stitch seams of lining same as for bag, leaving an opening in one side seam for turning. With RIGHT sides together, stitch lining to upper edge of bag, matching seams. Trim seam.

8. Turn bag and lining RIGHT side out; press. Slip-stitch opening closed.

9. Push lining into bag; press. Apply snaps to sides at small dots, following manufacturer's directions. Fasten snaps when finished.

BAG B

1. Make each bag side panel section from jute webbing as follows: Cut five pieces of jute webbing each 5" (12.5cm) long. Using front and back (7) pattern tissue as a guide, lap long edges of webbing approximately 1/2" (1.3cm) over each other so that it forms a side panel equal to the side length of front and back. Stitch close to lapped edges on both sides of panel.

2. To make bottom panel, cut two pieces of webbing each the length of lower edge of front and back. Lap the two pieces of webbing so that the bottom panel measures 5" (12.5cm) wide. Stitch close to lapped edges on both sides of panel.

3. Stitch side panels to ends of bottom panel in 1/2" (1.3cm) seams, stitching to within 1/2" (1.3cm) of long edges, as shown; back-stitch to reinforce seams.

NOTE: *You have cut four front and back sections. Two sections will be referred to as front and back and two sections will be referred to as facings.*

4. Working on bag front, with RIGHT sides together, pin front to side and bottom panel, placing seams at corners and having raw edges even. Baste.


5. With RIGHT sides together, pin facing to front, sandwiching side and bottom panel between the two layers and having raw edges even. Stitch, leaving upper edges open. Trim seams and corners.

6. Turn front RIGHT side out; press.

7. Working on bag back, with RIGHT sides together, pin back to remaining edge of side and bottom panel, placing seams at corners and having raw edges even. Baste.

8. With RIGHT sides together, pin facing to back, sandwiching bag front and side and bottom panel between the two layers and having raw edges even. Stitch, leaving upper edges open. Trim seams and corners.

9. Turn back RIGHT side out; press. Separate magnetic snap. Slip snap between bag and facing on front and back, placing snap at small dot. Using a hand running stitch, hand sew bag to facing, stitching around snap, as shown. Baste upper edges together when finished.

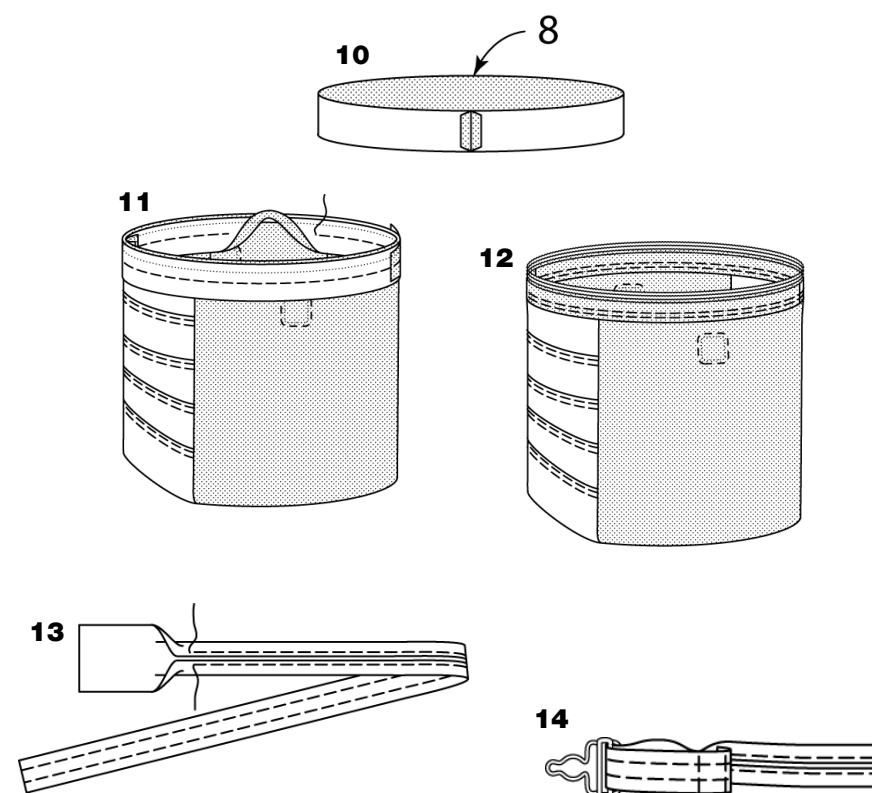

10. Stitch ends of band (8), forming a circle.

11. With RIGHT sides together, pin bands together, sandwiching upper edge of bag between the two layers, matching seams and placing stitching line along seam line of bag. Stitch bands through all thicknesses along stitching line.

12. Press bands up. Top-stitch band 1/4" (6mm) above seam and again 1/4" (6mm) away. Bands are cut on the bias and the edges are intentionally left raw.

13. Cut a piece of webbing 38" (96.5cm) long for strap. Bring long edges of strap to center; press. Stitch long edges in place.

14. Insert each end of strap through overall buckle, wrapping ends around center bar and turning under 5" (12.5cm) on end of strap. Press under 1/2" (1.3cm) on raw end. Stitch across end and again 1" (2.5cm) away from first stitching. Apply buttons to side panels and attach buckles over buttons when finished.

BAG C

1. Apply **FLEECE** to lower front and back (10). To make darts, with RIGHT sides together, bring broken lines together, matching small dots. Stitch along broken line from wide end to point. Apply one half of magnetic snap to lower front at small dot, following manufacturer's directions.

2. Apply **FLEECE** to upper front and back (9). Make and apply each handle as follows: Cut two pieces of jute cording each 32" (81.5cm) long. Working with two pieces of cording together, on OUTSIDE, pin one end of handle to upper front and back, placing ends 1/2" (1.3cm) over one lower small dot, as shown. Stitch across ends of cording at small dot with several rows of stitching.

3. Turn handle up over ends. Stitch across handle 1/2" (1.3cm) from lower small dot and at upper small dot. Twist cording together so that twisted length measures 21" (53.5cm) long. Stitch across end of handle just below twisted end. Trim end of handle so that 3" (7.5cm) extends beyond stitching.

4. Pin stitched end of handle to upper front and back, placing ends 1/2" (1.3cm) over lower small dot, as shown. Stitch across handle at lower small dot with several rows of stitching.












5. Turn handle up over end. Stitch across handle 1/2" (1.3cm) from lower small dot and at upper small dot over previous stitching.

6. With RIGHT sides together, stitch upper front and back to lower front and back. Stitch front to back along side and lower edges, matching seams and darts.

7. Turn bag RIGHT side out; press. Cut remaining jute cording in half, forming two pieces for strap. On OUTSIDE, pin the two strap pieces to upper edge of bag back at small dot, having raw edges even. Baste.

1387

3 / 3

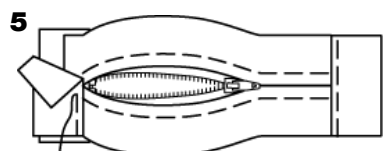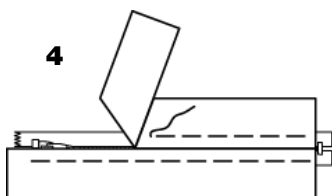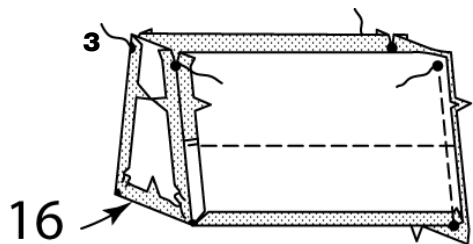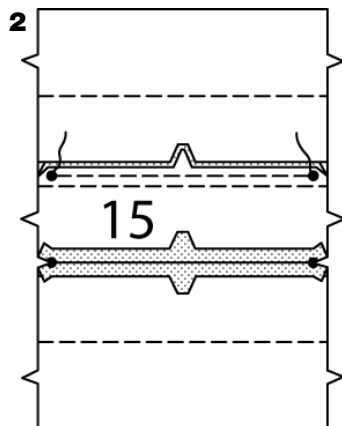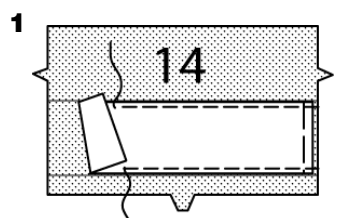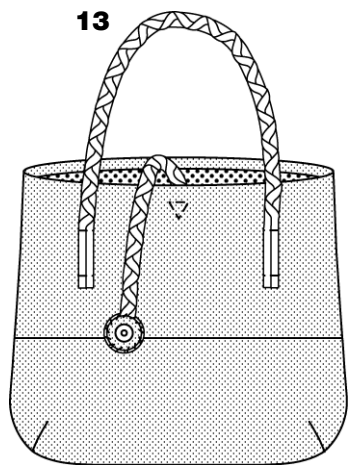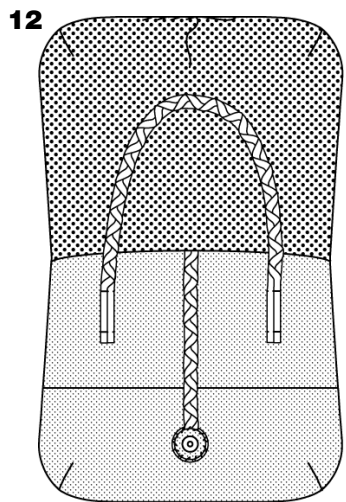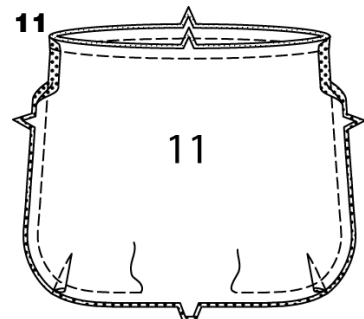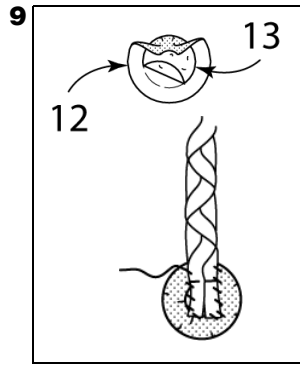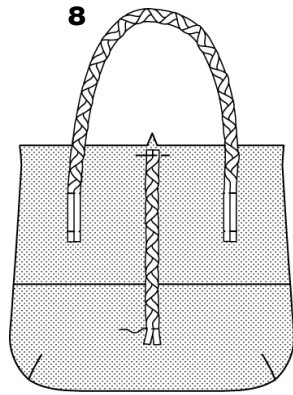

8. Twist the two strap pieces together for about 9-1/2" (24cm) long. Stitch across end of strap just below twist. Trim ends to within 1/2" (1.3cm) of stitching.

9. Fuse snap dot facing (13) cut of fleece to **WRONG** side of snap dot (12) along broken line, following manufacturer's directions. Press under raw edges of snap dot along edge of fleece. Hand sew end of strap to **WRONG** side of snap dot, as shown.

10. Apply remaining half of magnetic snap to center of felt snap dot facing, following manufacturer's directions. With **WRONG** sides together, pin facing to snap dot, sandwiching strap between the two layers and having edges even. Hand sew outer edges together, catching strap into stitching.

11. Stitch darts and seams of front and back lining (11) same as for bag, leaving an opening in lower edge for turning. With **RIGHT** sides together, stitch lining to upper edge of bag, matching seams. Trim seam.

12. Turn bag and lining **RIGHT** side out; press. Slip-stitch opening closed.

13. Push lining into bag, folding upper edge of bag to **INSIDE** along fold line; press, pressing strap out. On **OUTSIDE**, stitch along broken lines, catching strap into stitching to hold it in place.

BAG D












1. On **OUTSIDE**, pin jute webbing to front and back (14), placing it between placement lines for trim and having ends even. Stitch webbing close to long edges. Baste raw edges together.

2. Apply webbing to bottom (15) same as for front and back. With **RIGHT** sides together, pin front and back sections to bottom, matching small dots and notches. Stitch seams between small dots; back-stitch at small dots to reinforce seams.

3. With **RIGHT** sides together, pin side (16) sections to bag, matching small dots. Stitch side and lower edges below upper small dots; back-stitch at small dots to reinforce seams.

4. Cut two pieces of belting each 9-1/4" (23.5cm) long. Pin closed zipper under long edges of belting with tab end 3/4" (2cm) from one end, having edges meet at center of zipper. (Zipper will extend beyond other end of belting.) Baste. Stitch 3/8" (1cm) each side of center, using an adjustable zipper foot. Trim zipper even with end of belting.

5. Cut four pieces of belting each 3" (7.5cm) long. Encase each end of zipper as follows: Pin two pieces of belting together, sandwiching zipper end between belting and lapping belting 3/4" (2cm) over zipper end, as shown. Stitch inner edges of belting together, being careful to catch both edges of belting into stitching. Apply belting to other end of zipper in same manner. Trim belting so that entire zipper assembly equals the length of upper edge of bag.

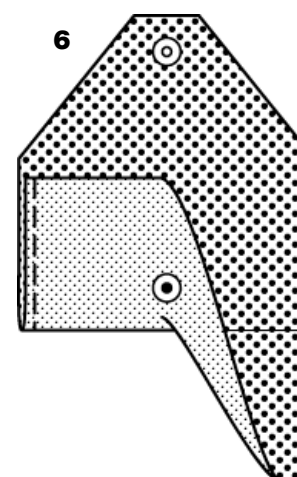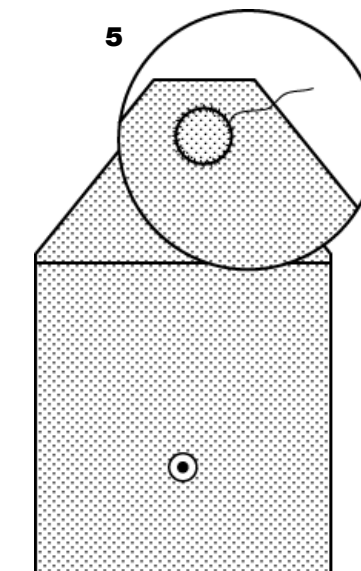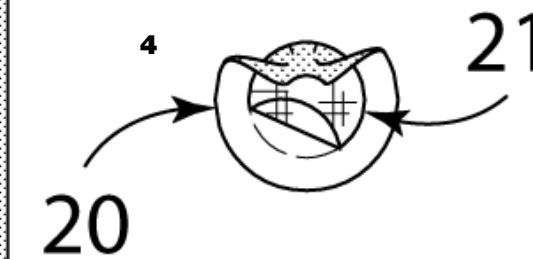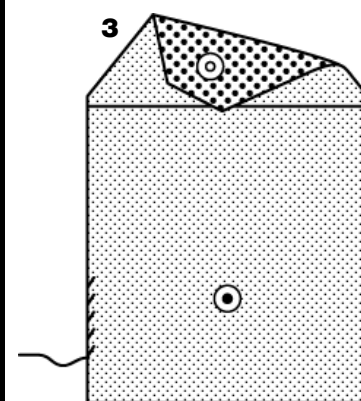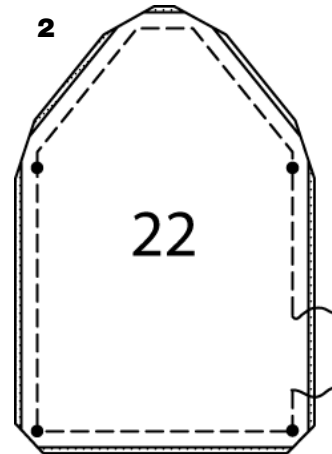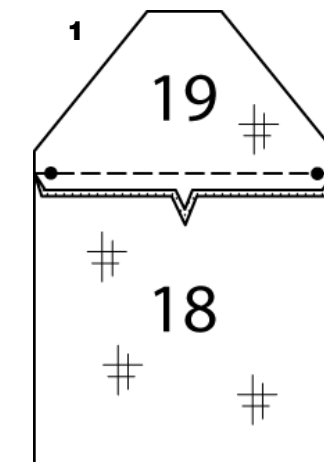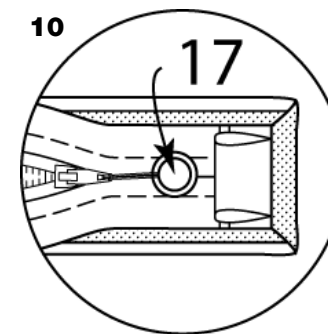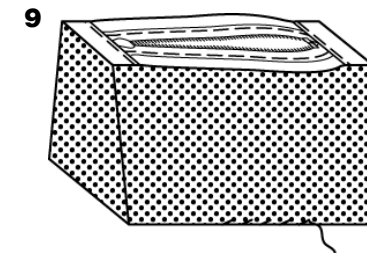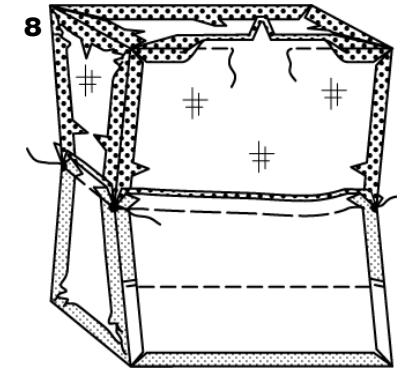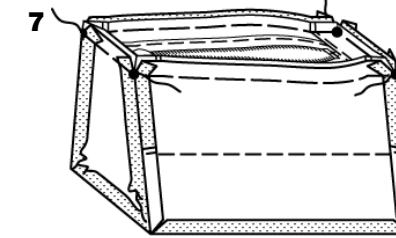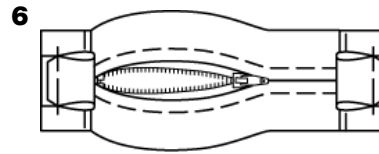

6. Cut two pieces of belting each 3" (7.5cm) for tabs. Fold tab in half, having raw edges even. Press. On **OUTSIDE**, pin tabs to ends of zipper assembly, centering them over zipper and having raw edges even. Baste.

7. Open zipper. With **RIGHT** sides together, pin zipper assembly to upper edge of bag, having raw edges even. Baste.

8. Apply **INTERFACING** to lining sections. Stitch seams of lining same as for front and back, bottom and sides, leaving an opening in one seam for turning. With **RIGHT** sides together, pin lining to upper edge of bag over zipper assembly, matching small dots. Stitch in 1/2" (1.3cm) seams, breaking stitching at small dots; back-stitch at small dots to reinforce seams. Trim seams and corners.

9. Turn lining **RIGHT** side out through opening. Slip-stitch opening closed.

10. Turn bag **RIGHT** side out through zipper opening. Close zipper. Cut a piece of leatherette cord 4" (10cm) long for zipper pull. Fold cord in half and insert folded end through zipper tab, as shown. Glue dots (17) together, sandwiching ends of zipper pull between the two layers.

BAG E

1. Apply **INTERFACING** to front and back (18) and flap (19). With **RIGHT** sides together, stitch flap to notched end of front and back, matching small dots. Press seam away from flap.

2. With **RIGHT** sides together, stitch lining (22) to bag, matching small dots and leaving a small opening for turning in one side edge. Trim seams and corners.

3. Turn bag **RIGHT** side out; press. Slip-stitch opening closed. Apply magnetic snap to bag and lining at small dots, following manufacturer's directions.

4. Apply dot **INTERFACING** (21) to snap dot (20) along broken line. Press under raw edges of snap dot to **WRONG** side along edge of interfacing.

5. On **OUTSIDE**, pin snap dot to flap over magnetic snap backing, as shown. Hand sew pressed edges of snap dot in place.

6. Fold front of bag along fold line, having side edges even. Press. Stitch side edges together 1/4" (6mm) from finished edges. Fold flap down along fold line when finished; press.