


Brindille & Twig sewing pattern and tutorial



#89



rolled hem romper



Size range: Premie to 5-6T : 44 to 118

Supply list

Fabric

Medium weight knit fabric. I use cotton/lycra jersey.

Short version:

0.75 yards (meters) for sizes up to 2-3T

1 yard (meter) for size 3-4T to 5-6T

Long version:

0.75 yards (meters) for sizes up to 6-9M

1 yard (meter) sizes 9-12M to 2-3T

1.25 yards (meters) sizes 3-4T to 5-6T

Lightweight fusible interfacing.

0.12 yards (meters) for all sizes

Machines

Serger,

Sewing machine

Tools

Scissors,

Safety pins,

Snap fastener

Notions

5 sets of snaps


(I suggest size 14 aka: 5/16": 8mm)

Putting together a Brindille & Twig pattern:


- Print the pattern pages at 100%- No scaling or fitting to page.
(I suggest only printing the pattern and reading instructions off the computer, if you have Internet access.)
- Follow the photo examples to tape your pattern together.




Pattern printed out.

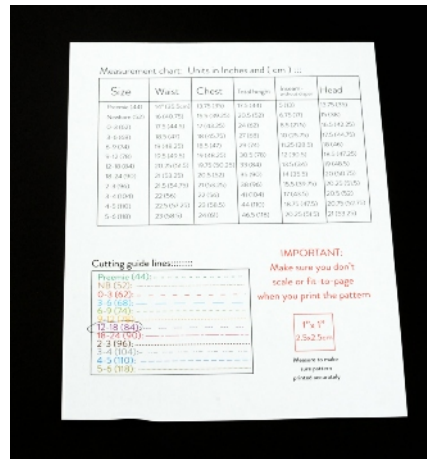

Measure the 1"x1" square to make sure it printed accurately.

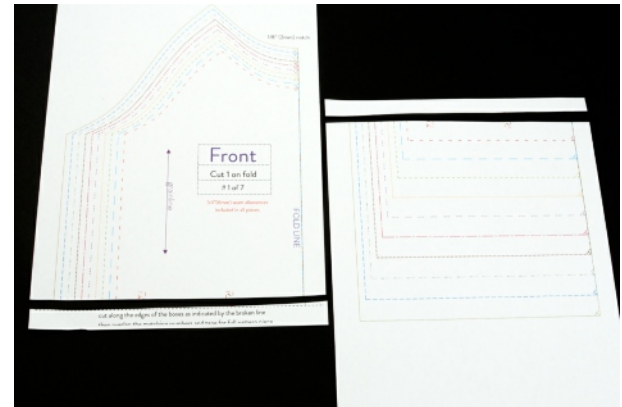

Cut along the edges of the indication boxes to cut the extra white paper off. It makes it easier to line them up.

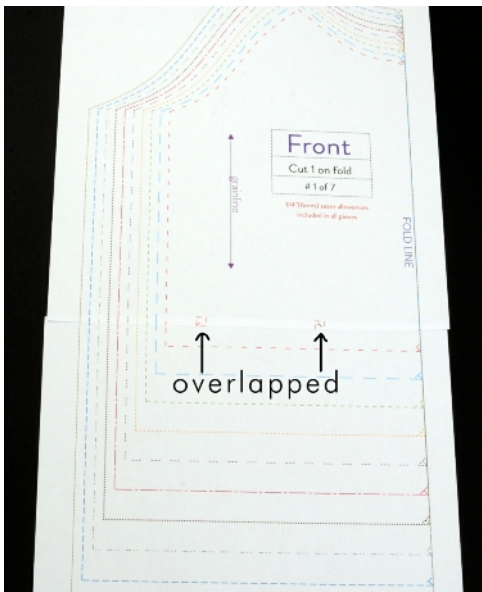

Overlap those boxes with the matching number and tape together at that seam.



Cut out the size that works best based on the measurement chart.

Body measurements: Units in Inches and (cm) :::

Size	Waist	Chest	Total height	Inseam- without diaper	Head
Preemie (44)	14” (35.5cm)	13.75 (35)	17.5 (44)	5 (13)	13.75 (35)
Newborn (52)	16 (40.75)	15.5 (39.25)	20.5 (52)	6.75 (17)	15 (38)
0-3 (62)	17.5 (44.5)	17 (43.25)	24 (62)	8.5 (21.5)	16.5 (42.25)
3-6 (68)	18.5 (47)	18 (45.75)	27 (68)	10 (25.75)	17.5 (44.75)
6-9 (74)	19 (48.25)	18.5 (47)	29 (74)	11.25 (28.5)	18 (46)
9-12 (78)	19.5 (49.5)	19 (48.25)	30.5 (78)	12 (30.5)	18.5 (47.25)
12-18 (84)	20.25 (51.5)	19.75 (50.25)	33 (84)	13.5 (34)	19 (48.5)
18-24 (90)	21 (53.25)	20.5 (52)	35 (90)	14 (35.5)	20 (50.75)
2-3 (96)	21.5 (54.75)	21 (53.25)	38 (96)	15.5 (39.75)	20.25 (51.5)
3-4 (104)	22 (56)	22 (56)	41 (104)	17 (43.5)	20.5 (52)
4-5 (110)	22.5 (57.25)	23 (58.5)	44 (110)	18.75 (47.5)	20.75 (52.75)
5-6 (118)	23 (58.5)	24 (61)	46.5 (118)	20.25 (51.5)	21 (53.25)


Cutting guide lines:::::::::

Preemie (44):	
NB (52):	-----
0-3 (62):	- - - - -
3-6 (68):	— — — — —
6-9 (74):	- - - - -
9-12 (78):	-----
12-18 (84):	--- --- ---
18-24 (90):	-----
2-3 (96):	
3-4 (104):	- - - - -
4-5 (110):	- - - - -
5-6 (118):	-----

IMPORTANT:
 Make sure you don't
 scale or fit-to-page
 when you print the pattern



Measure to make
 sure pattern
 printed accurately

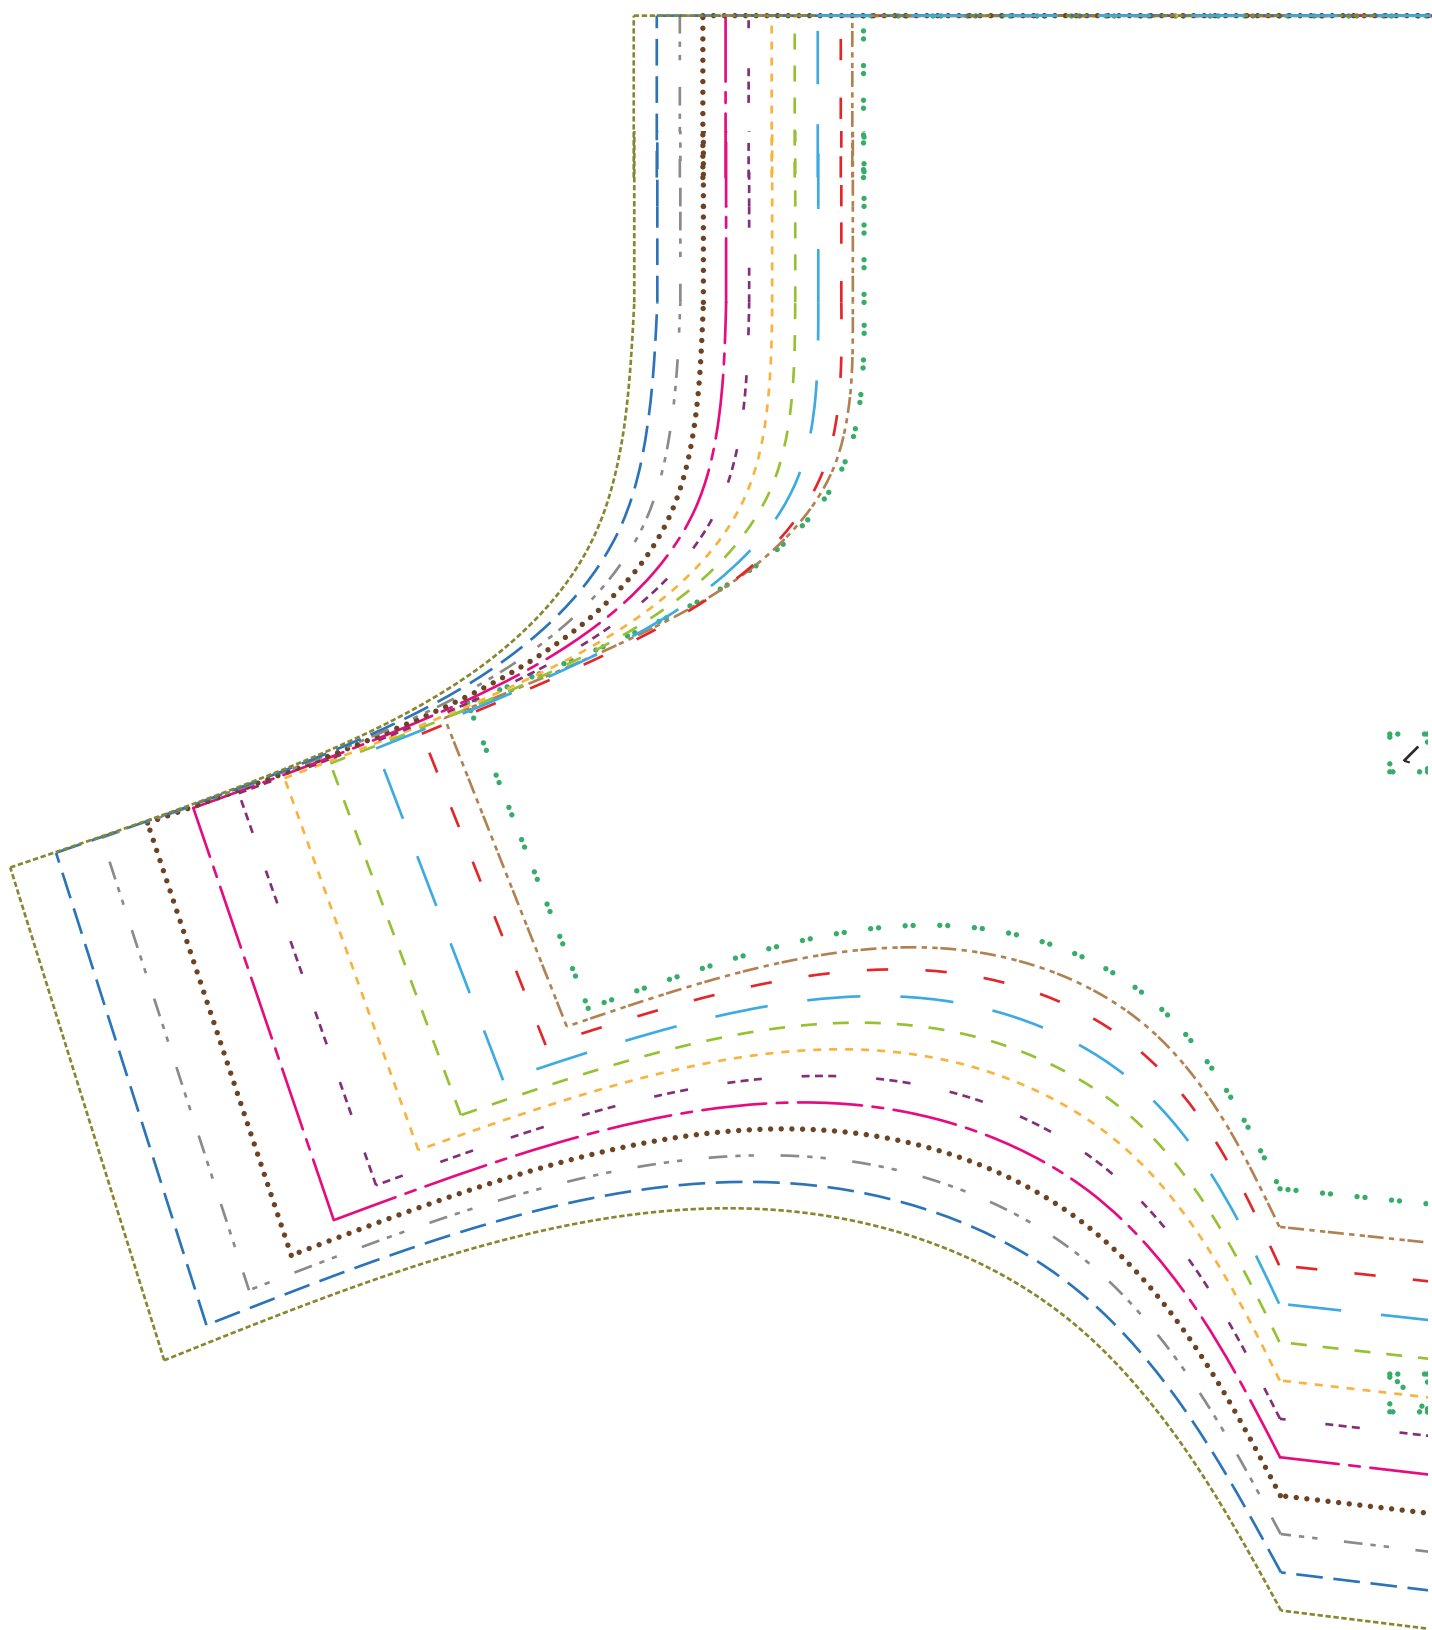



Front		#89
Cut 2		
Cut 1 with pattern facing up and 1 with pattern facing down to get opposites		
piece 1 of 6		



grainline


1/4"(6mm) seam allowances
included in all pieces


cut along the edges of the boxes as indicated by this broken line then overlap the matching numbers and tape for full pattern piece.


W

There are two hem lengths for each size. The shorter one is for the shorts version and the longer for the pants version. Cut along whichever length you want to make.

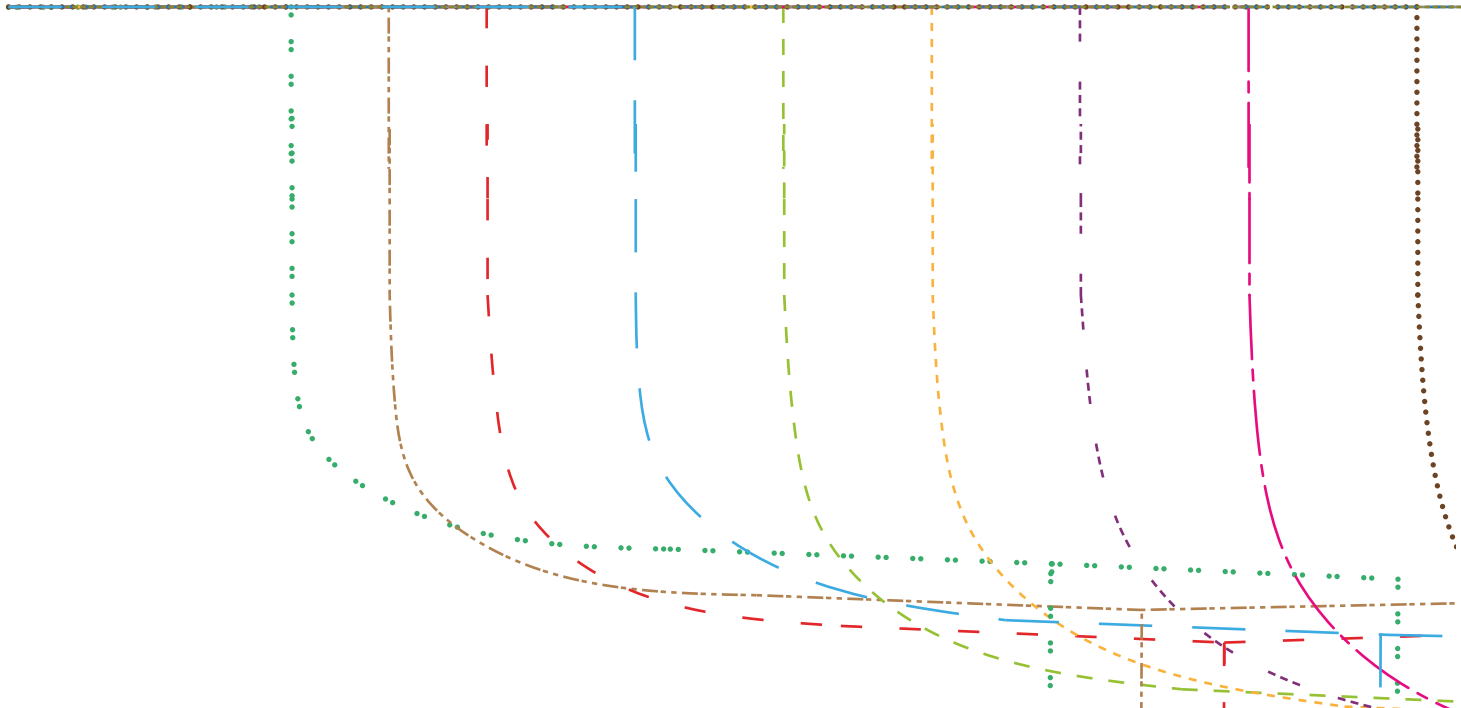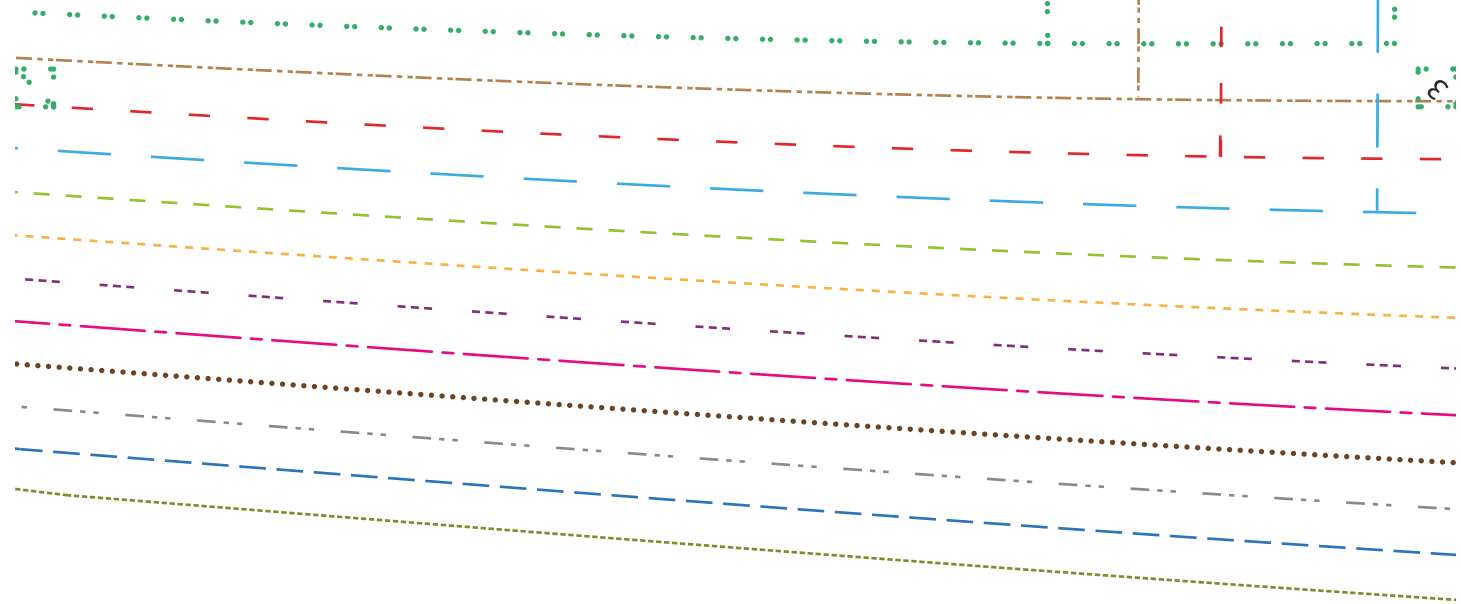

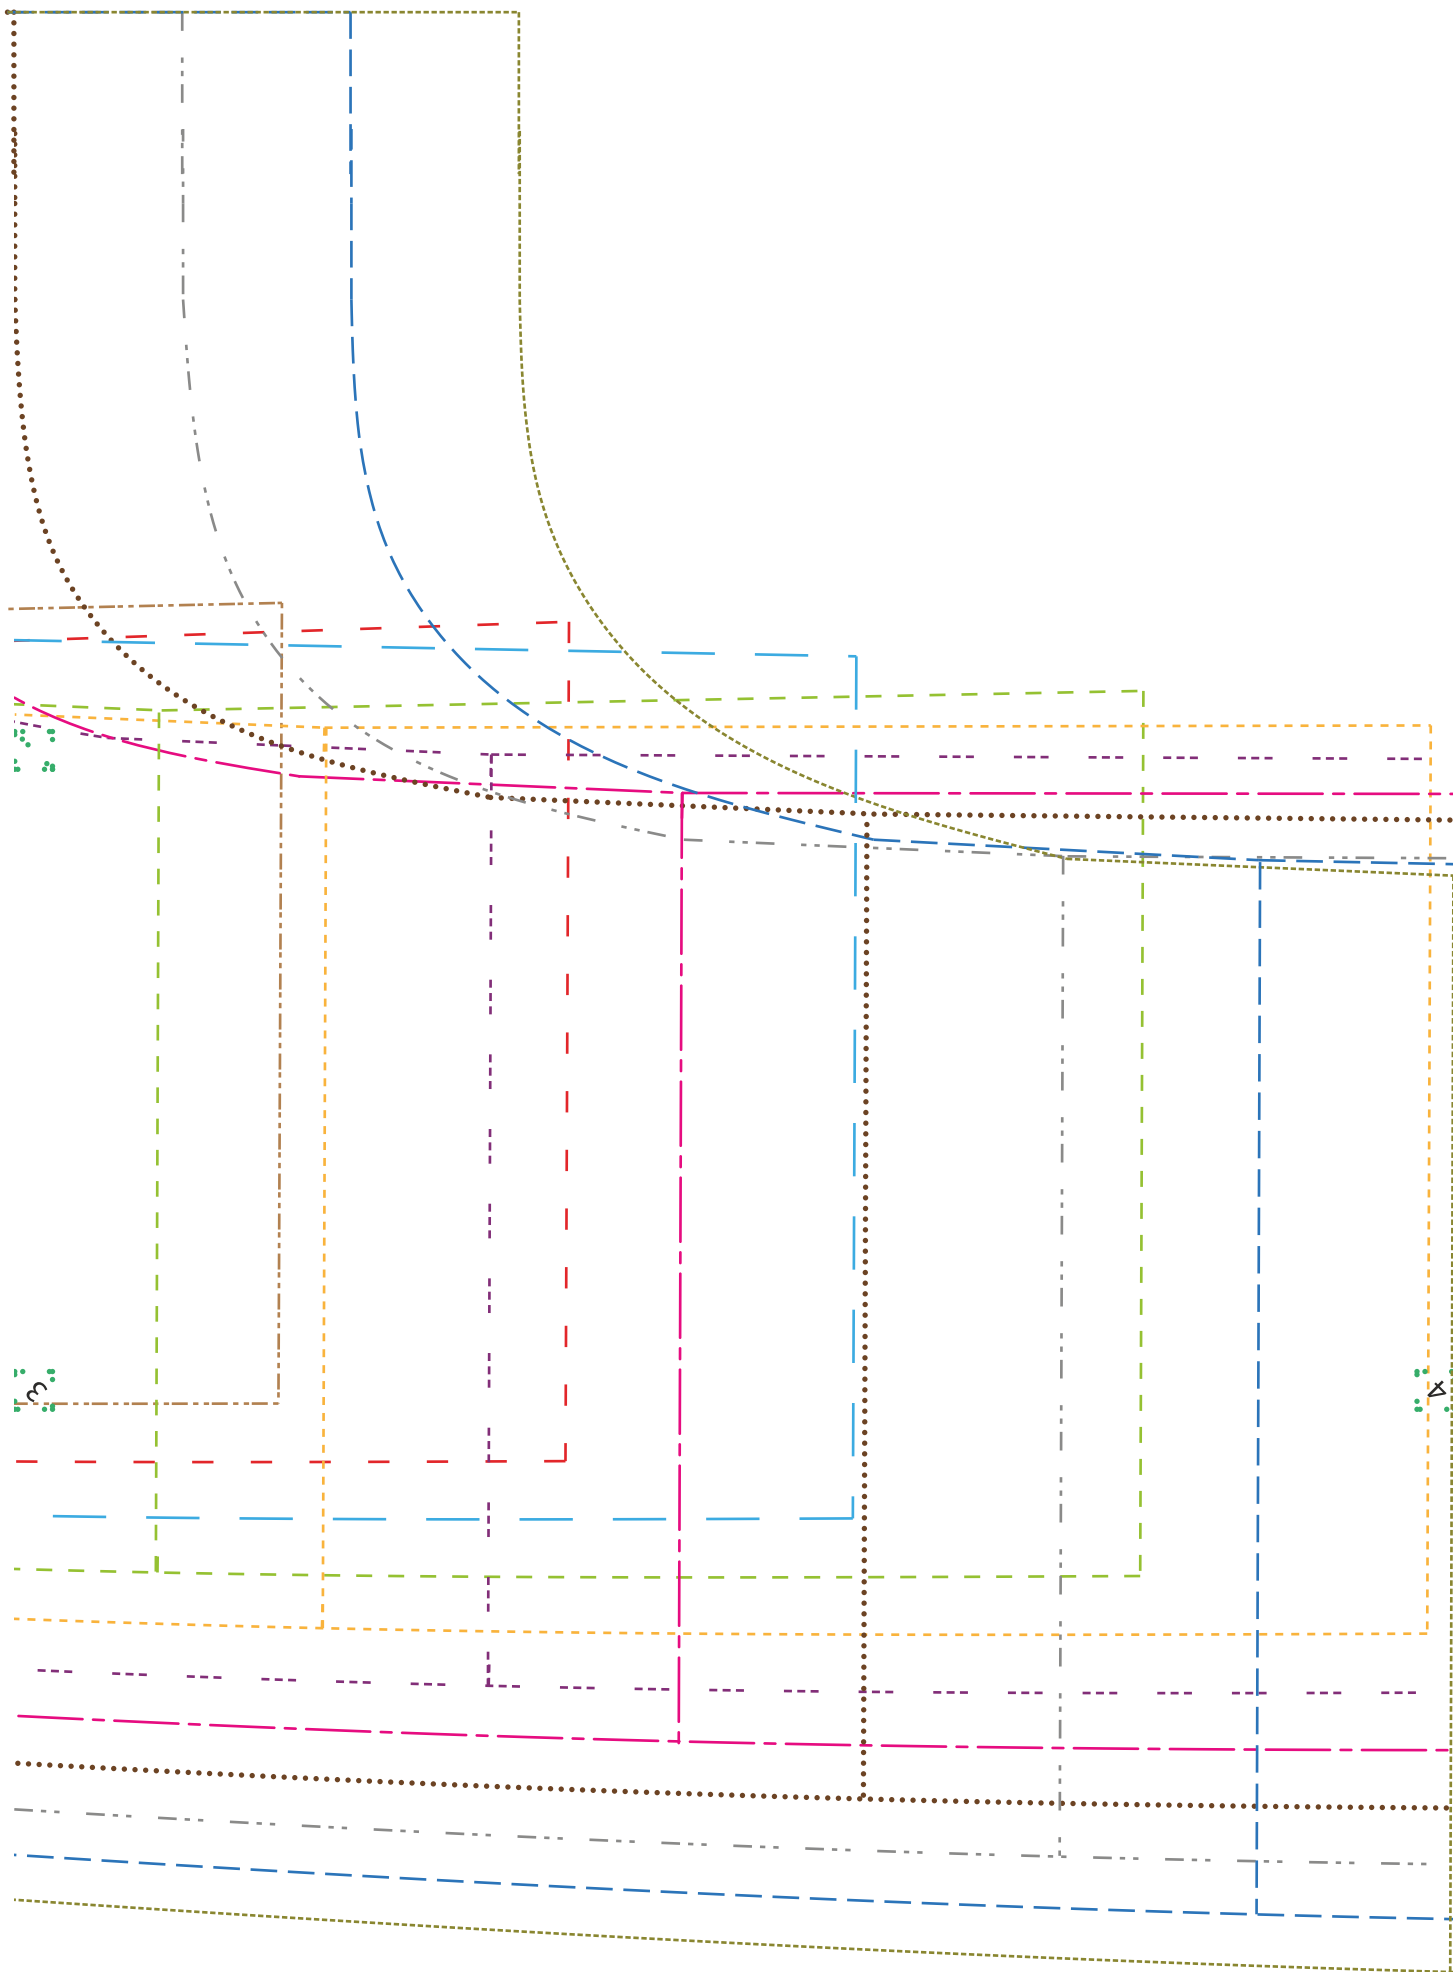


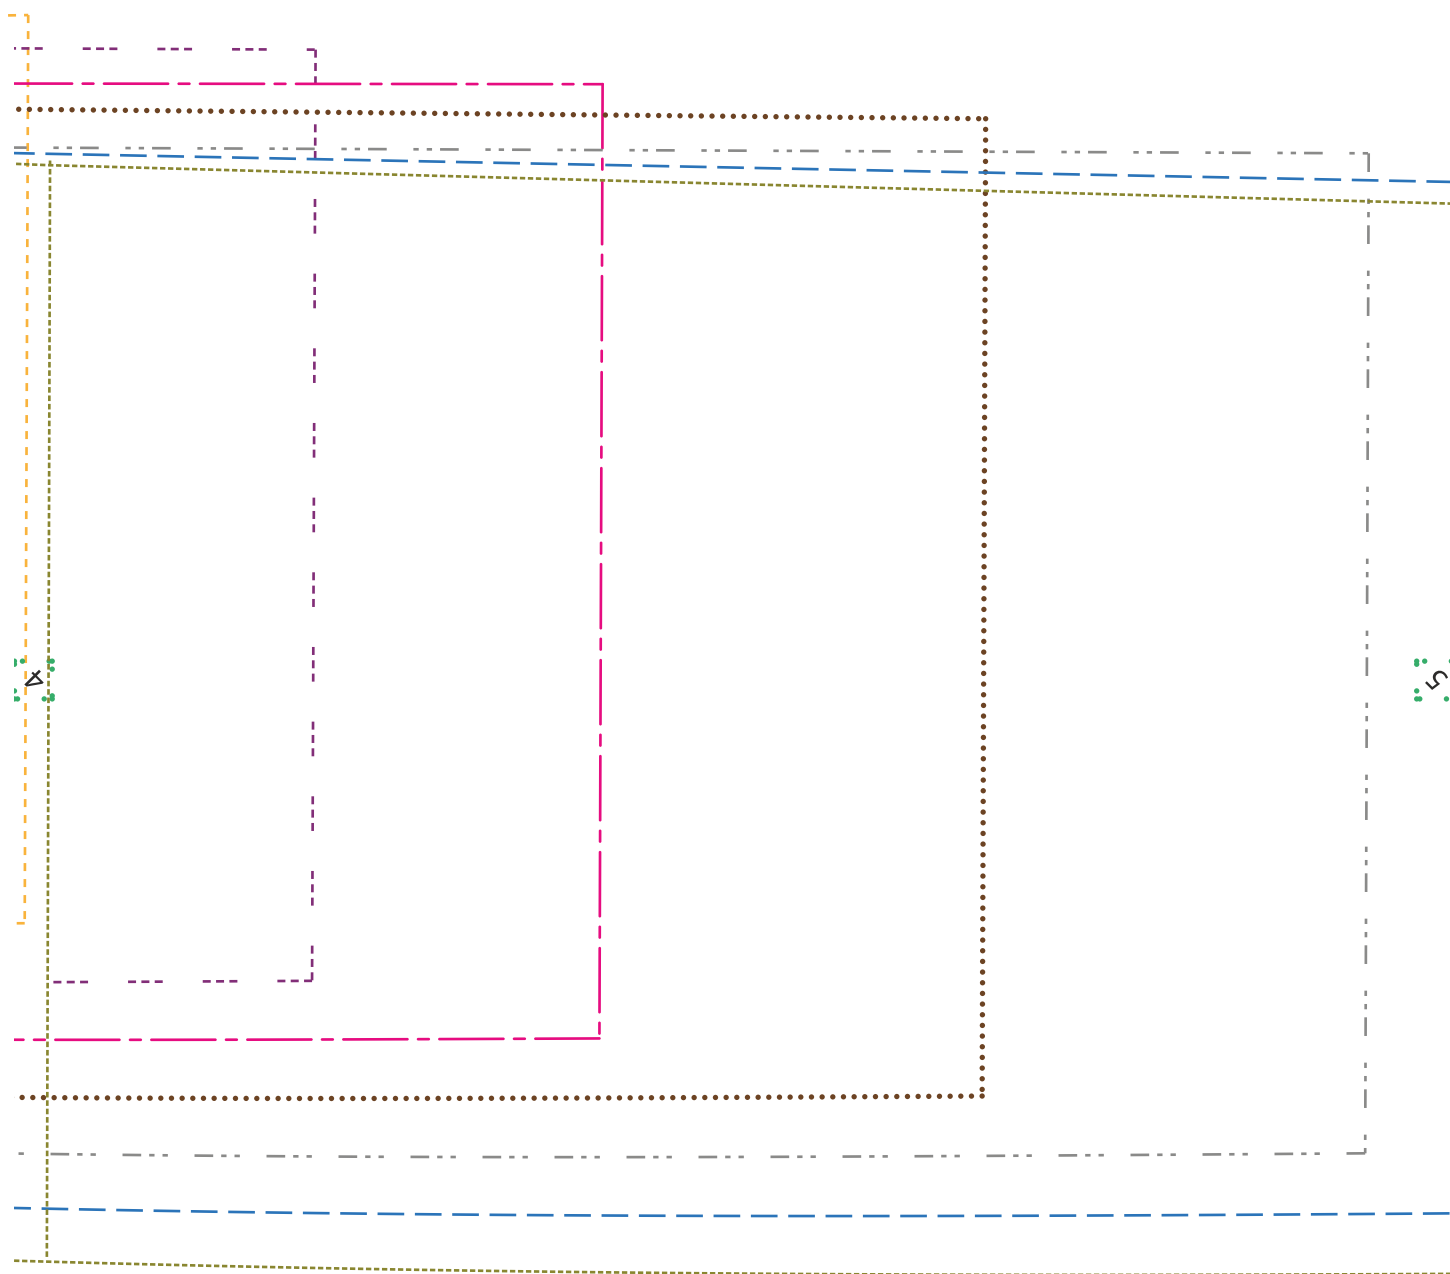

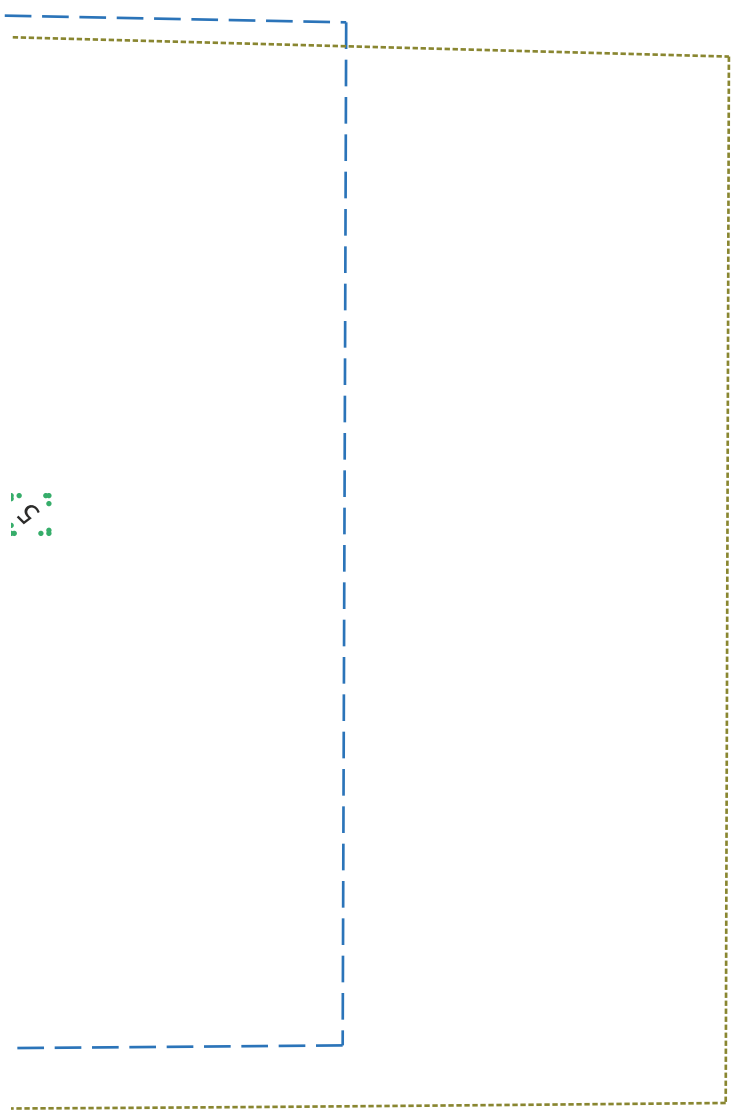

5

1/8" (2mm) notch

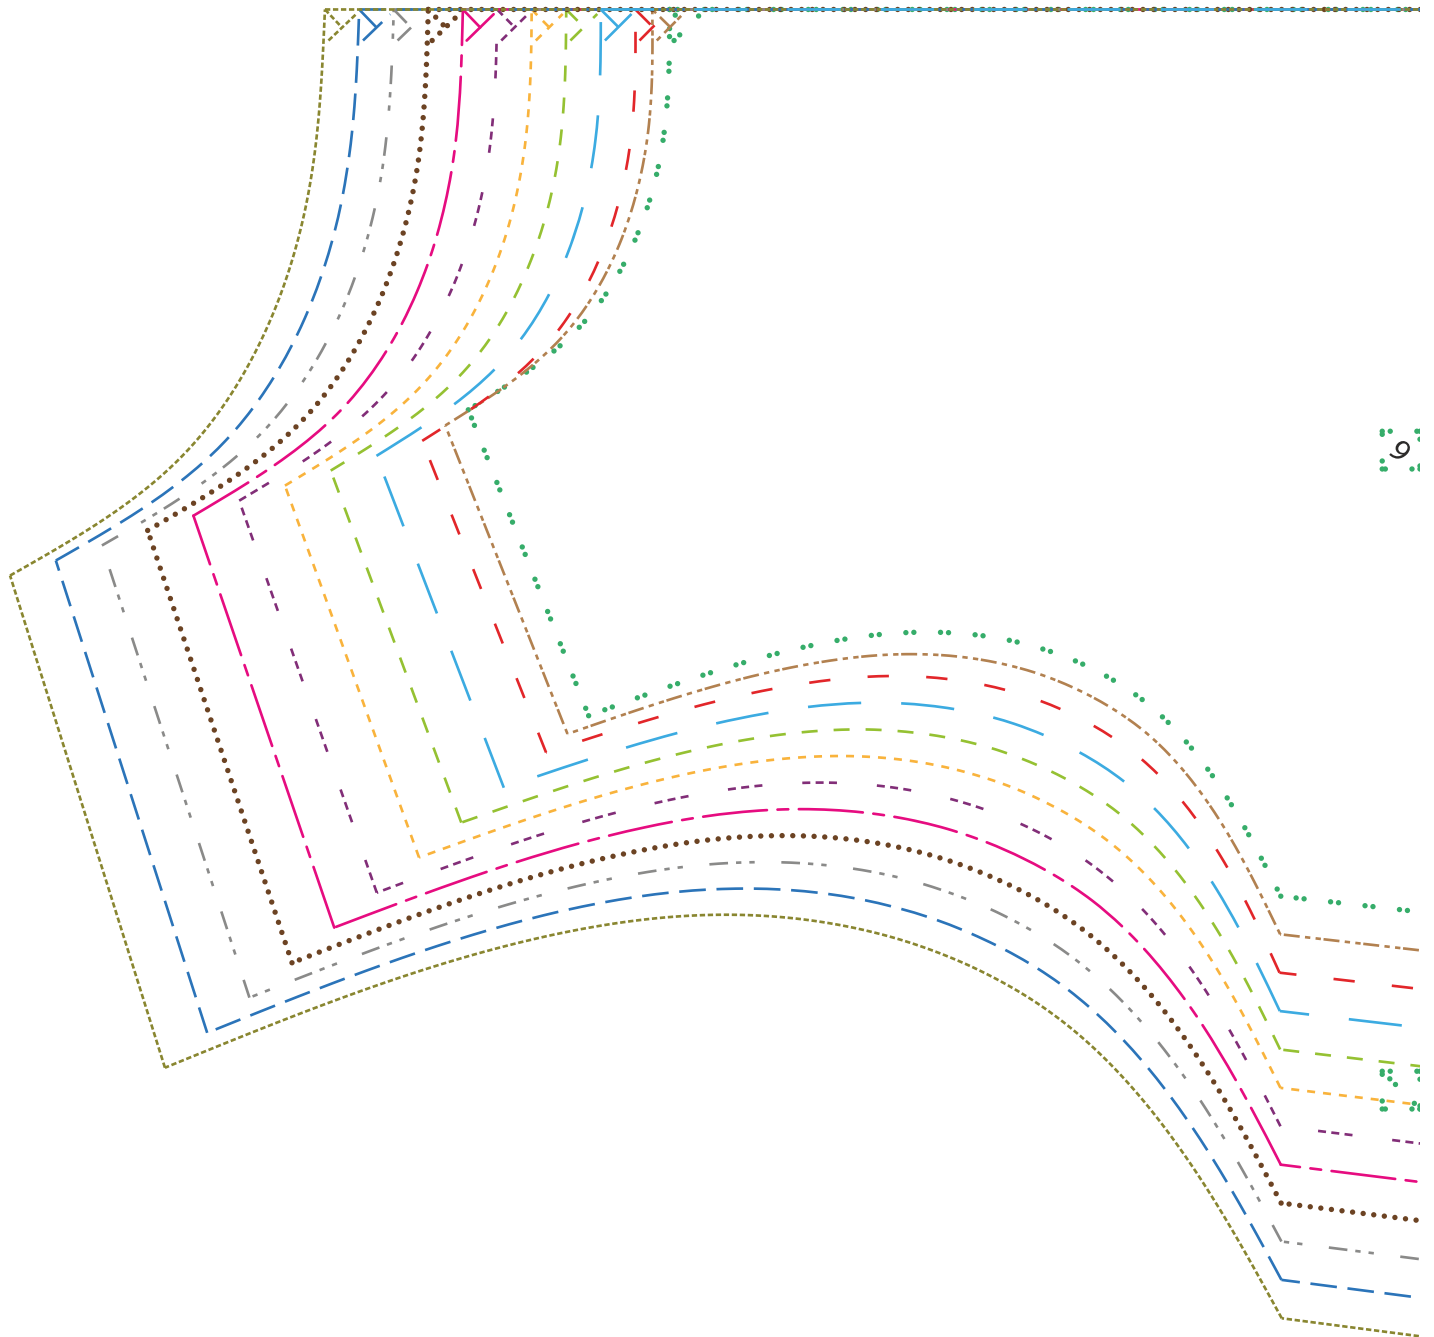

FOLD LINE


grainline


#89


Back


Cut 1 on fold

piece 2 of 6

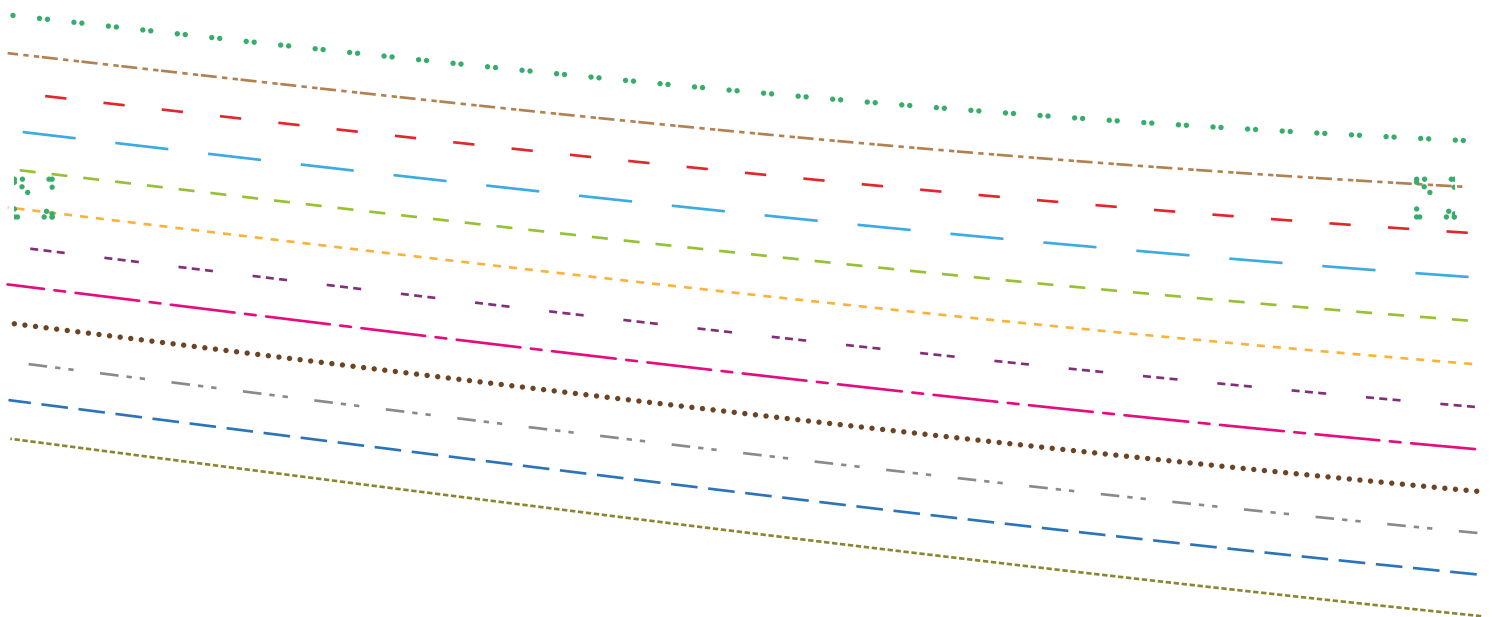


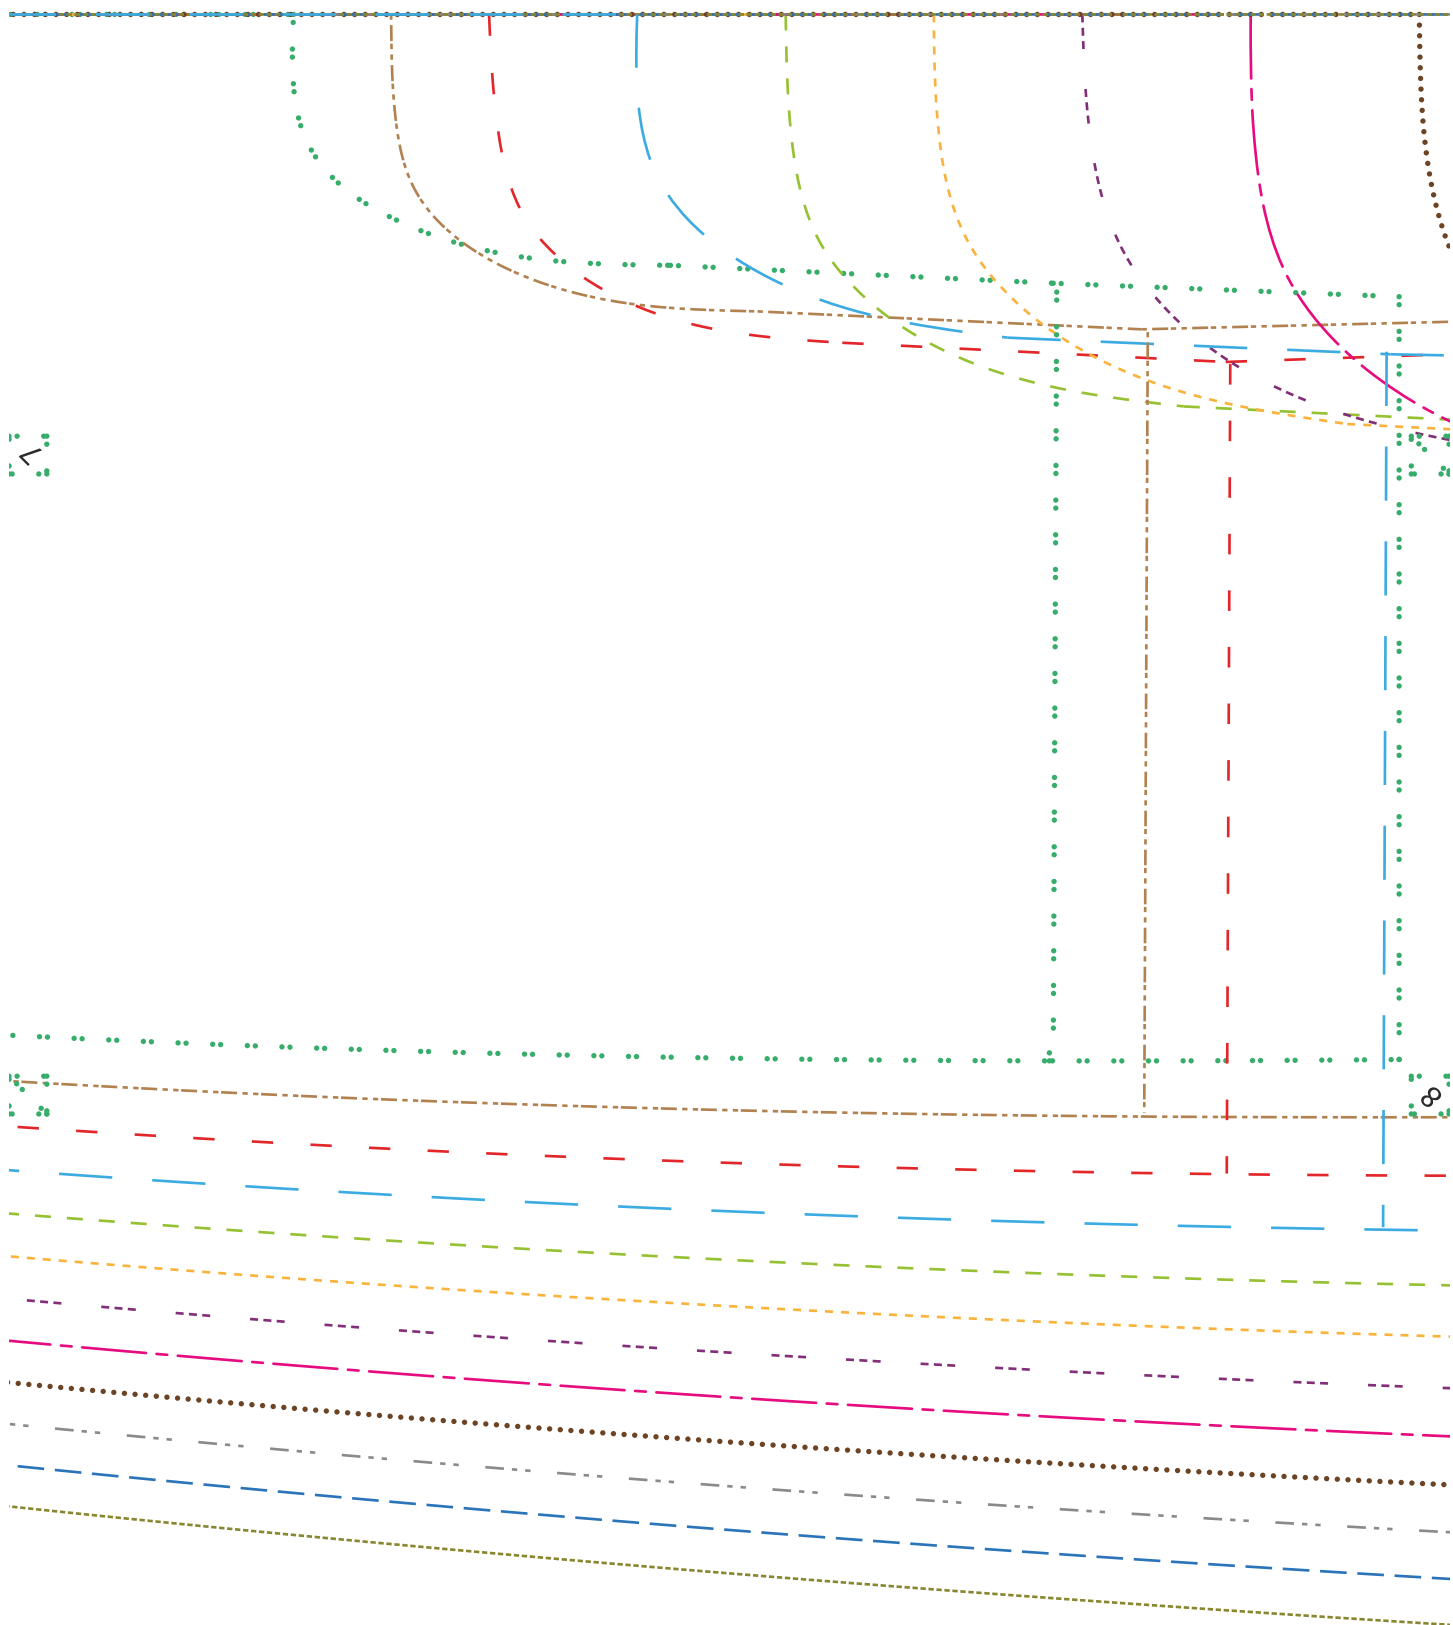


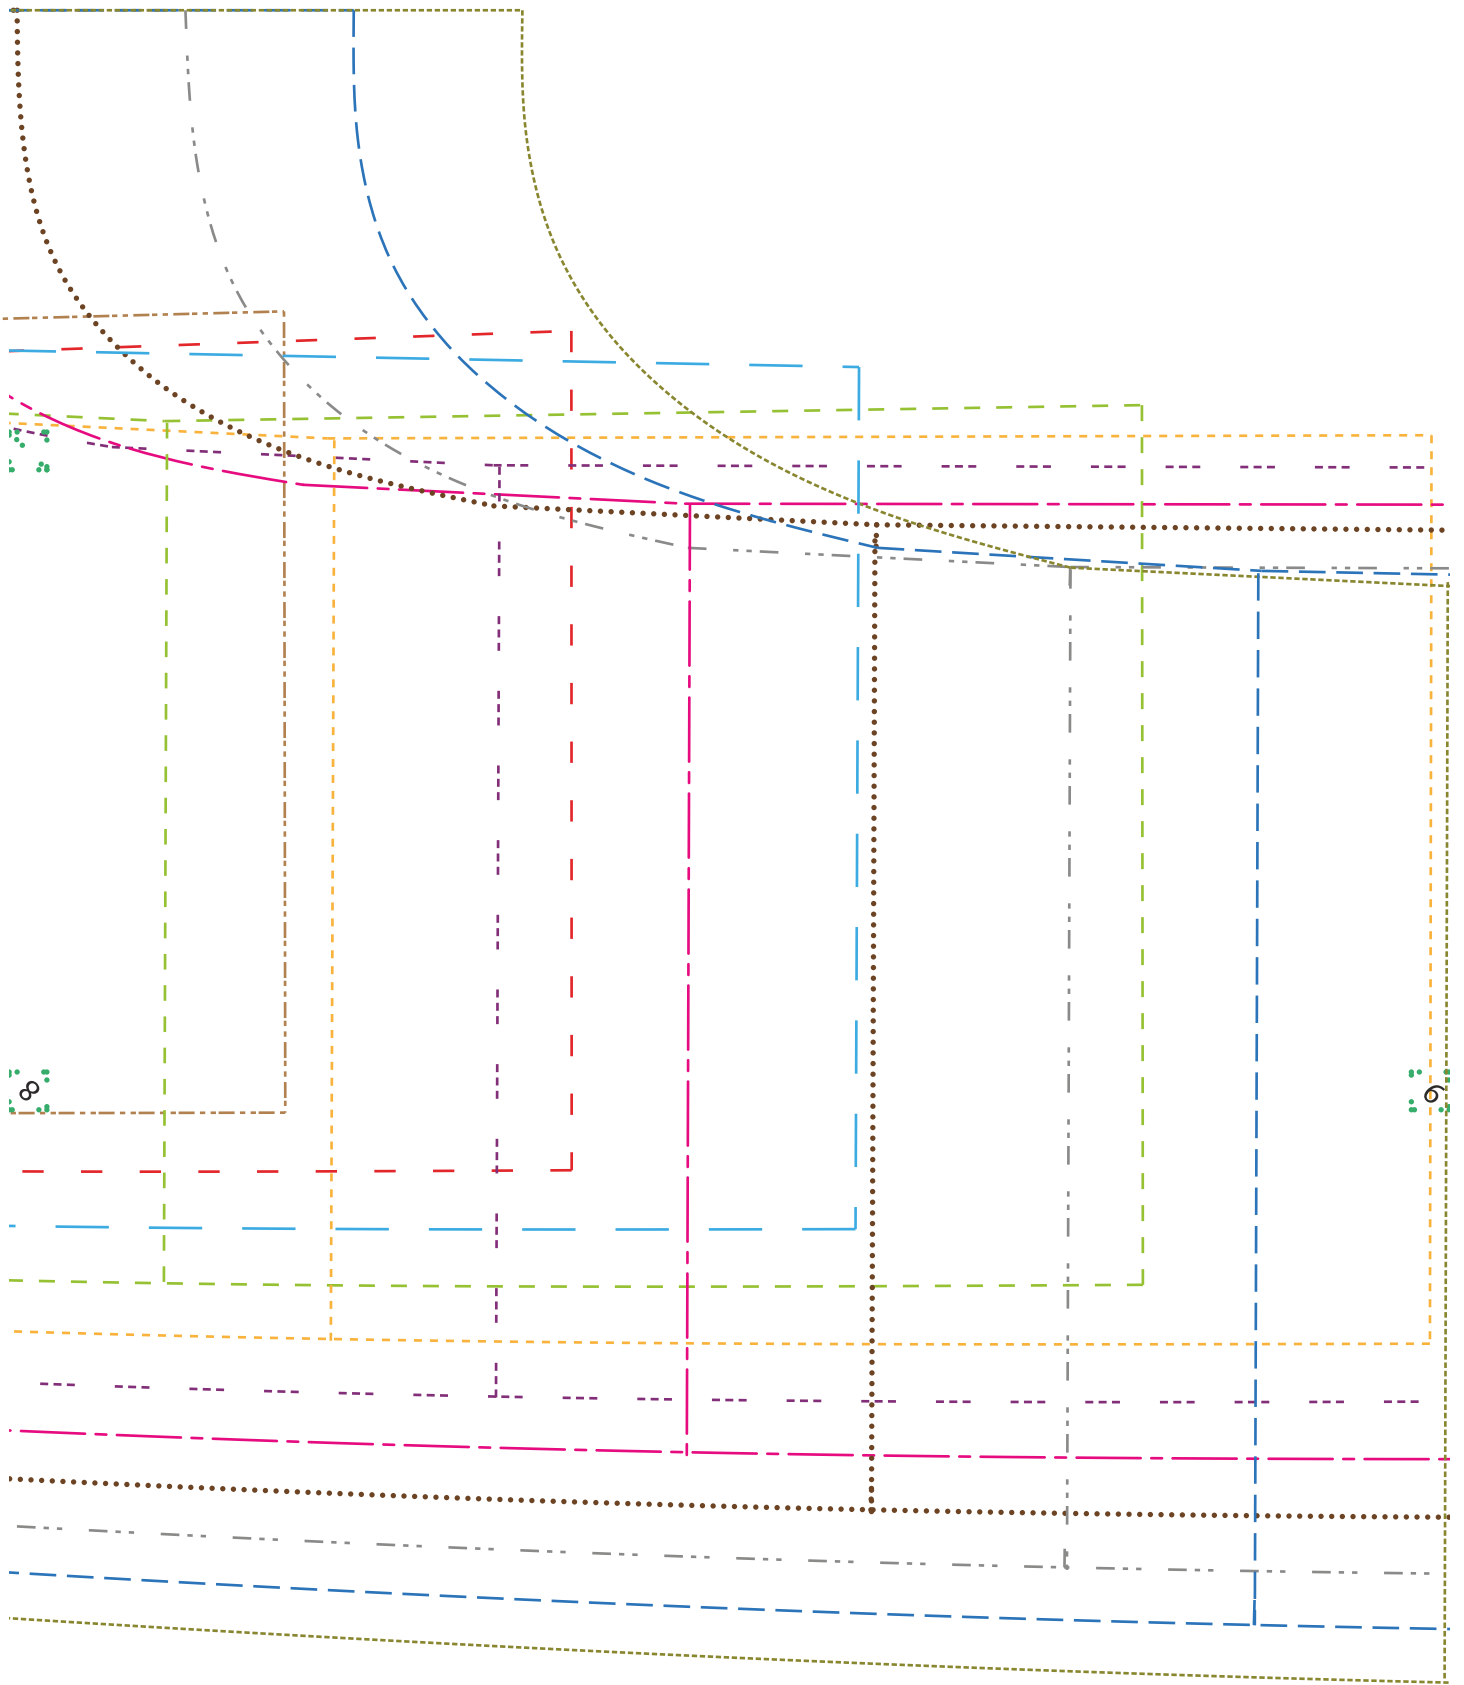


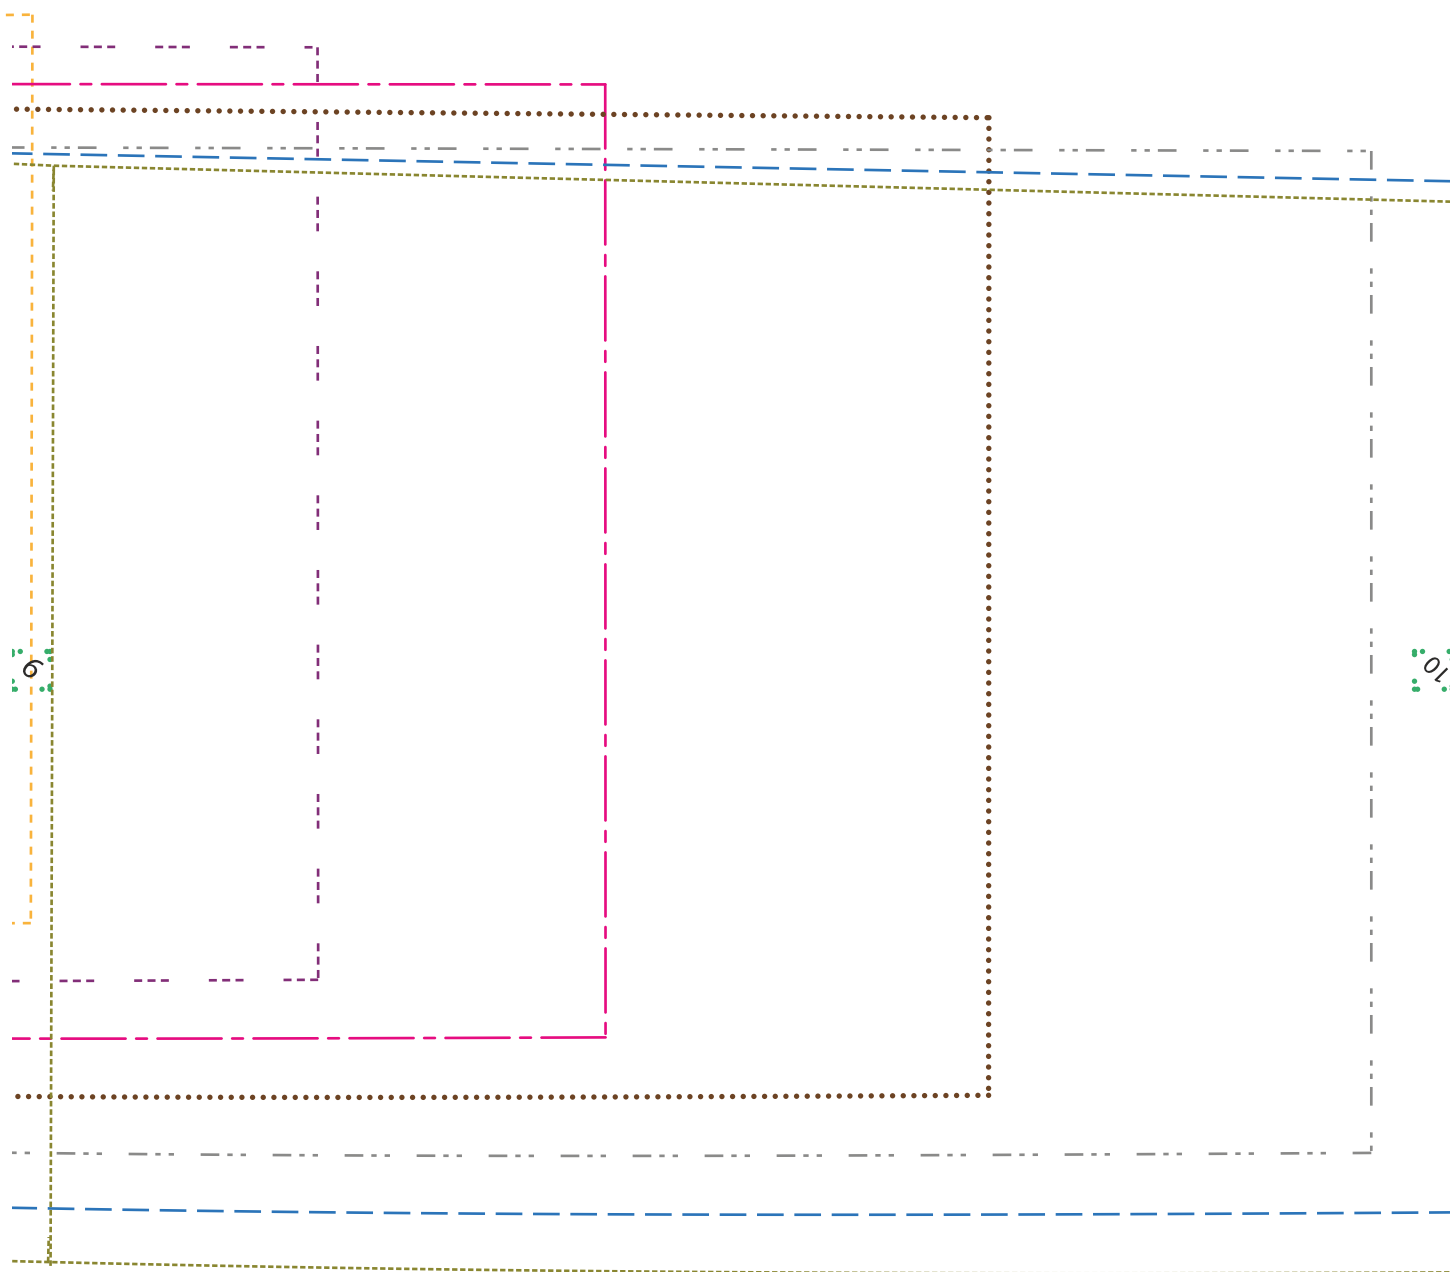

10

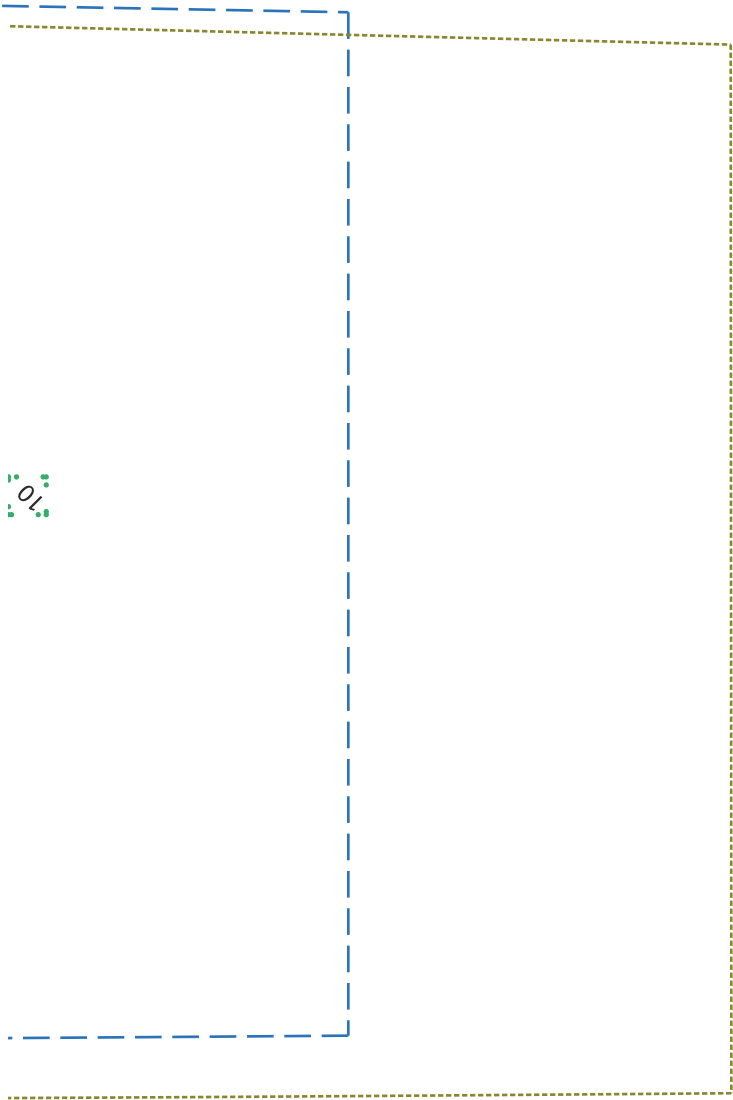

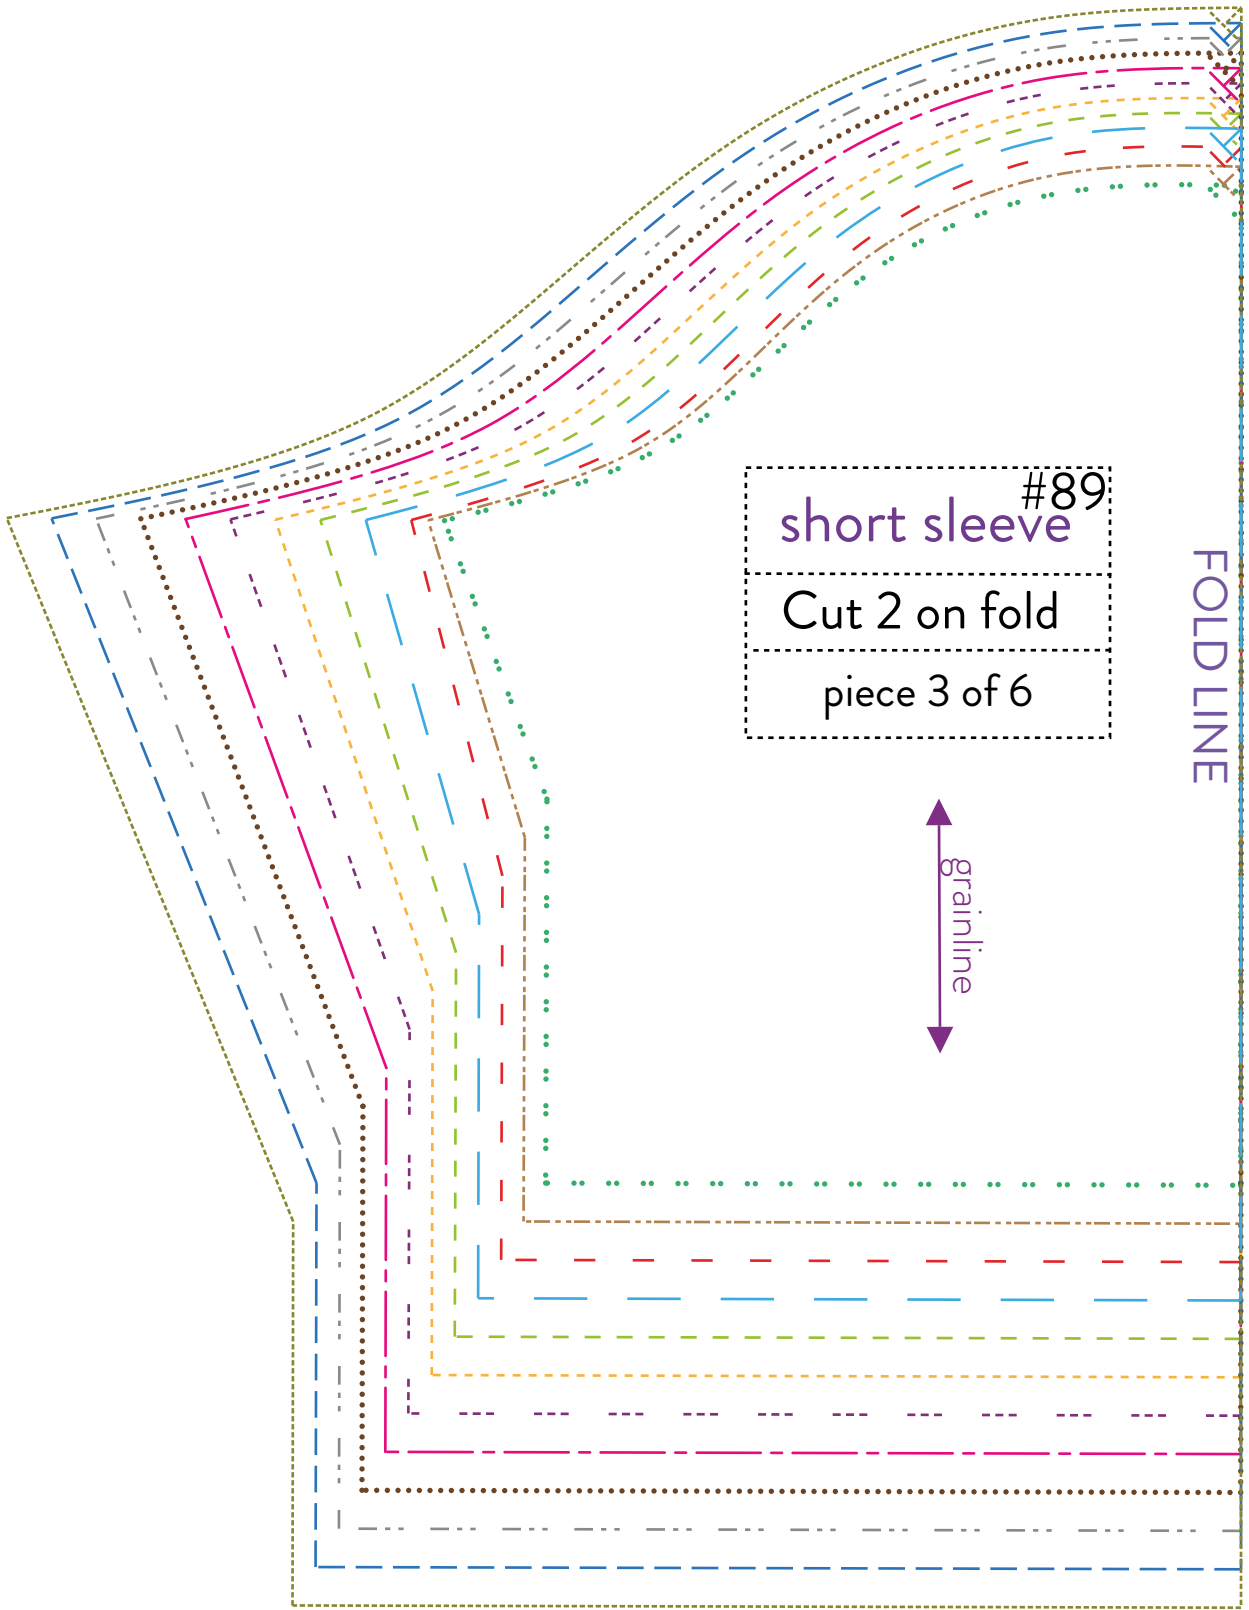

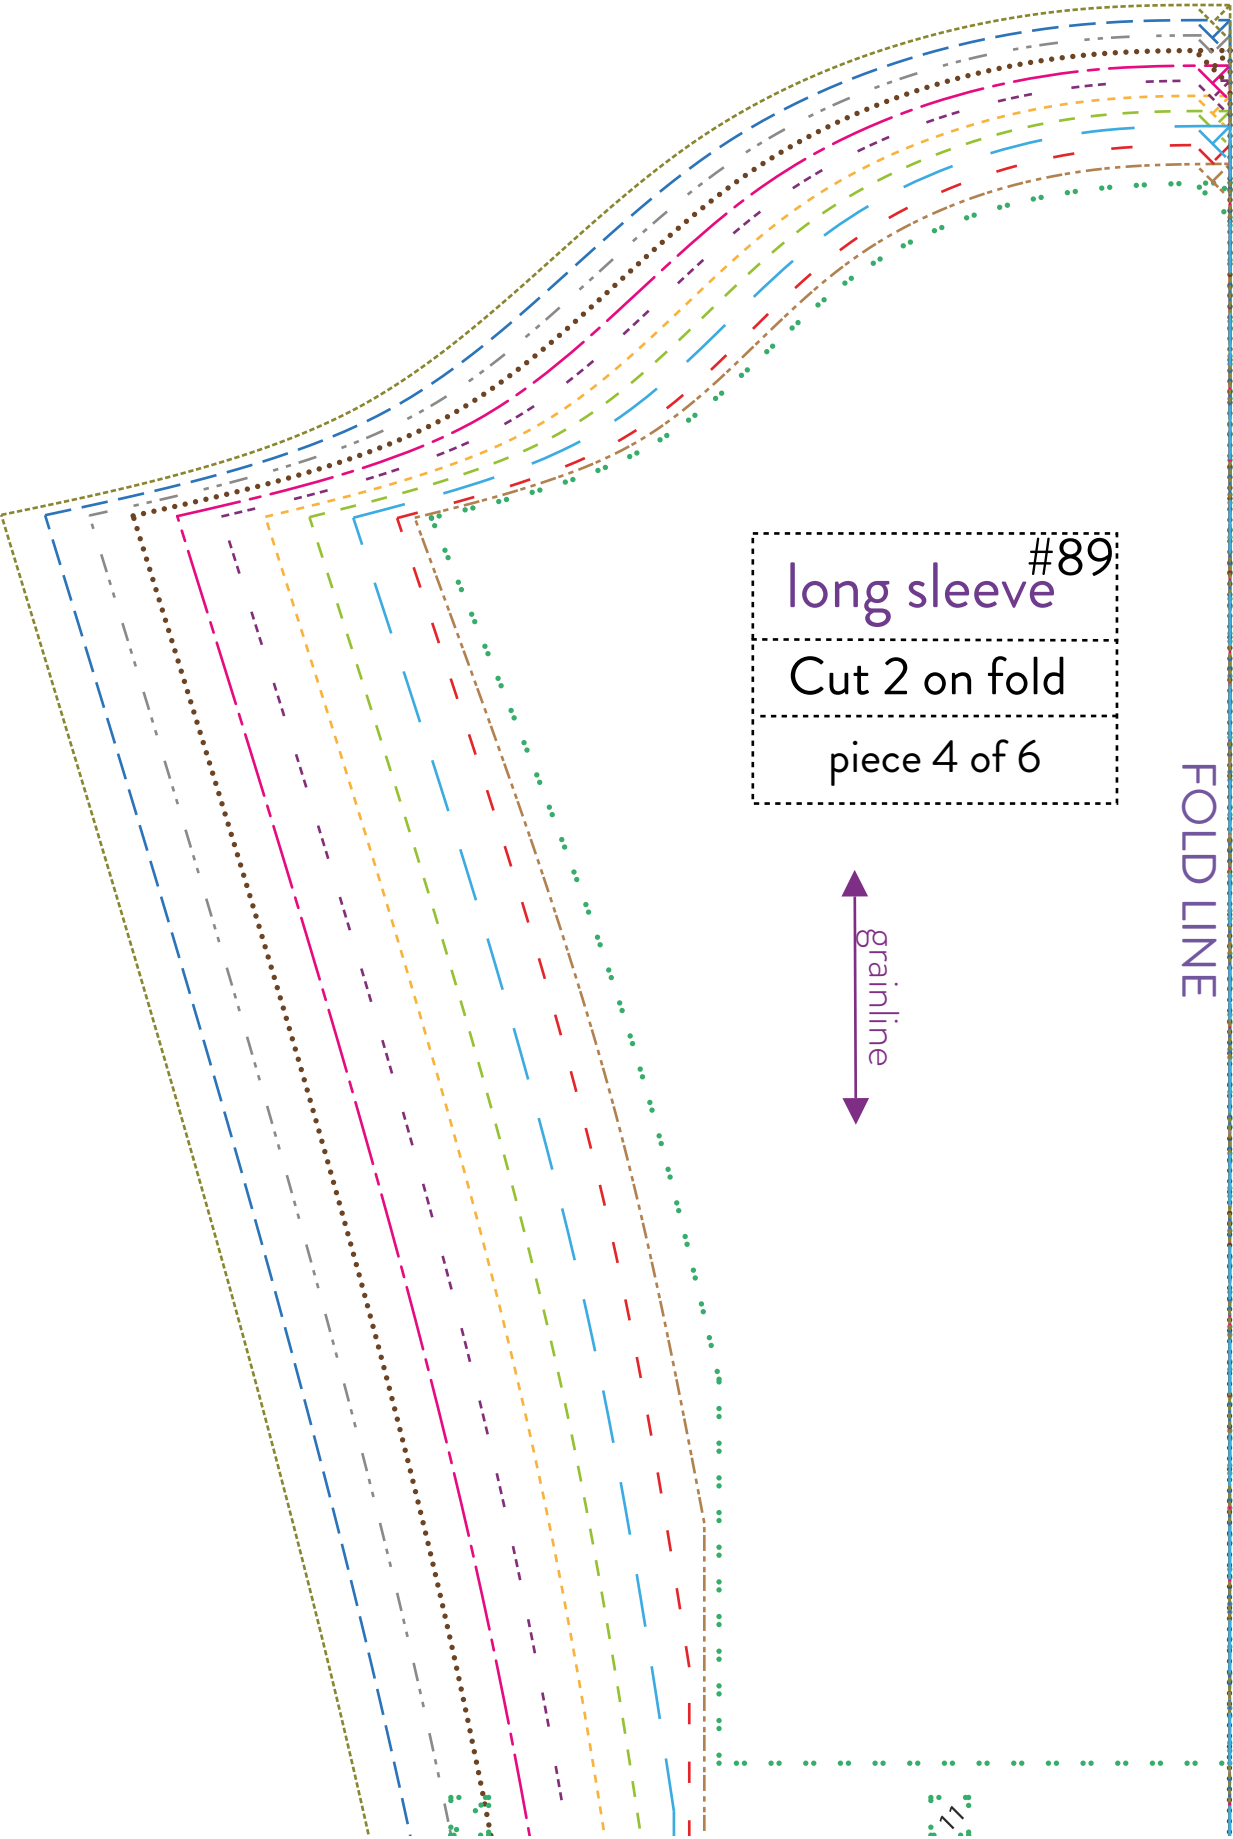

long sleeve #89


Cut 2 on fold

piece 4 of 6

grainline

FOLD LINE

11

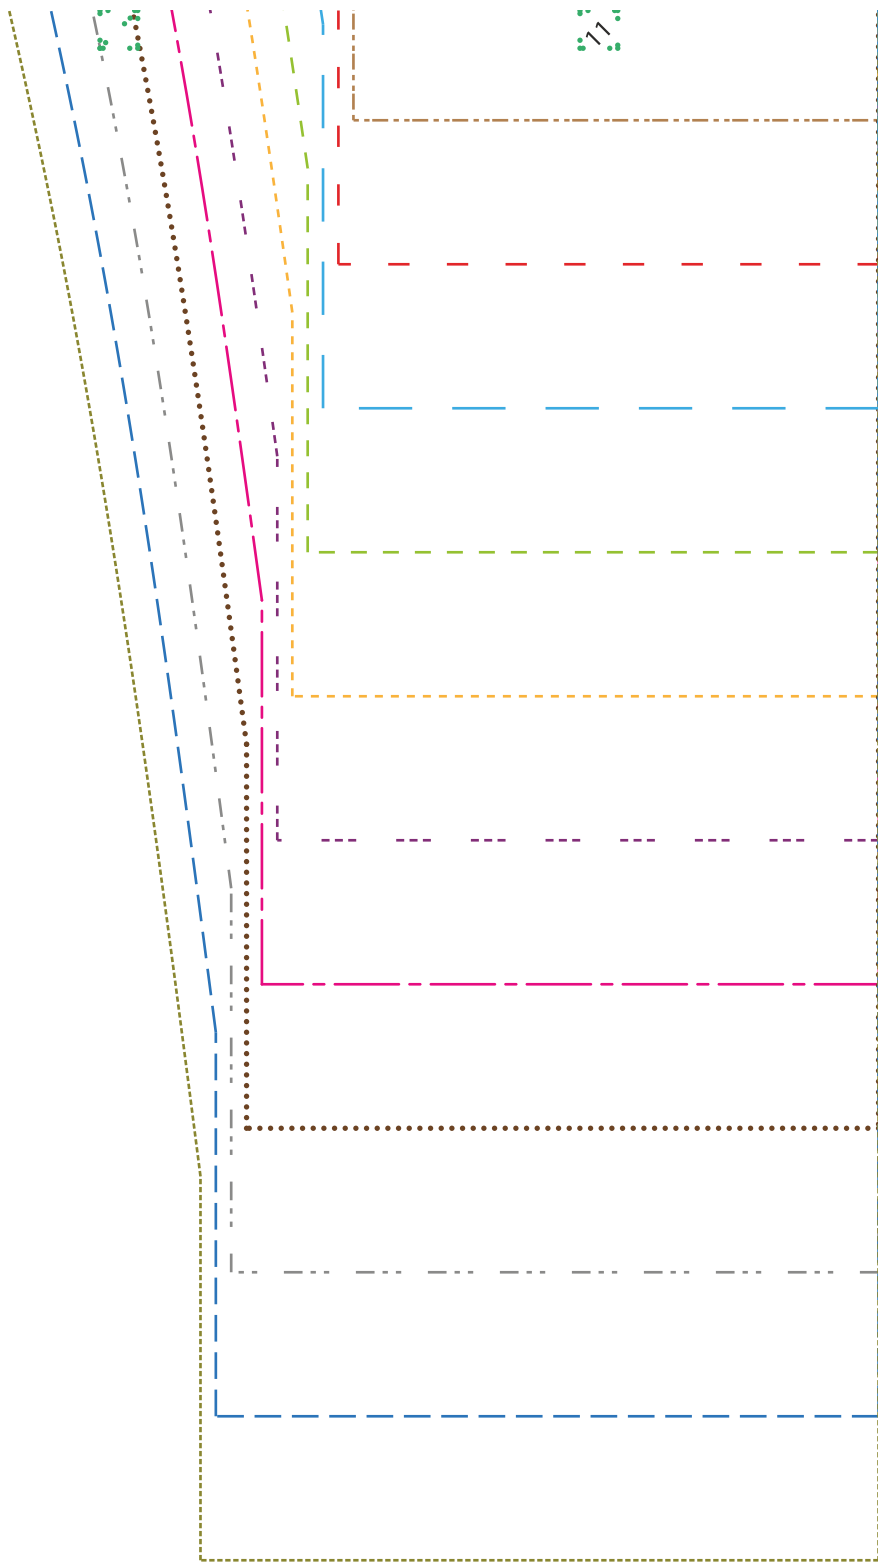

interfacing

Cut 2

#89
piece
5 of 6

12

12

13

13

neckband

Cut 1

piece 6 of 6

#89





grainline

14

14

15

15

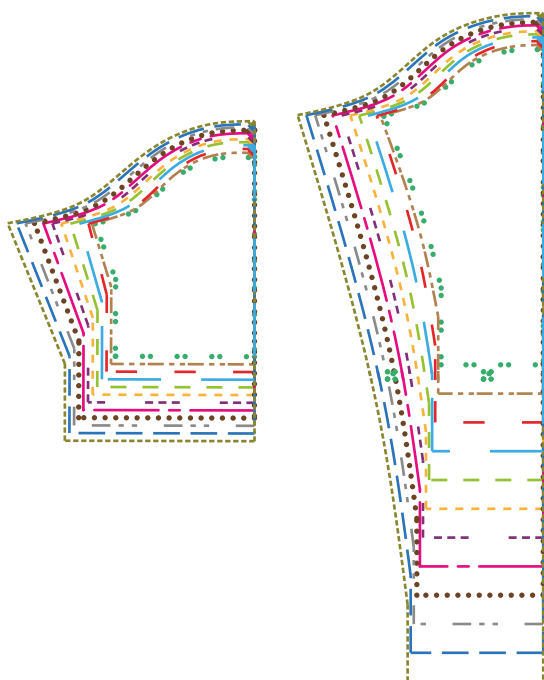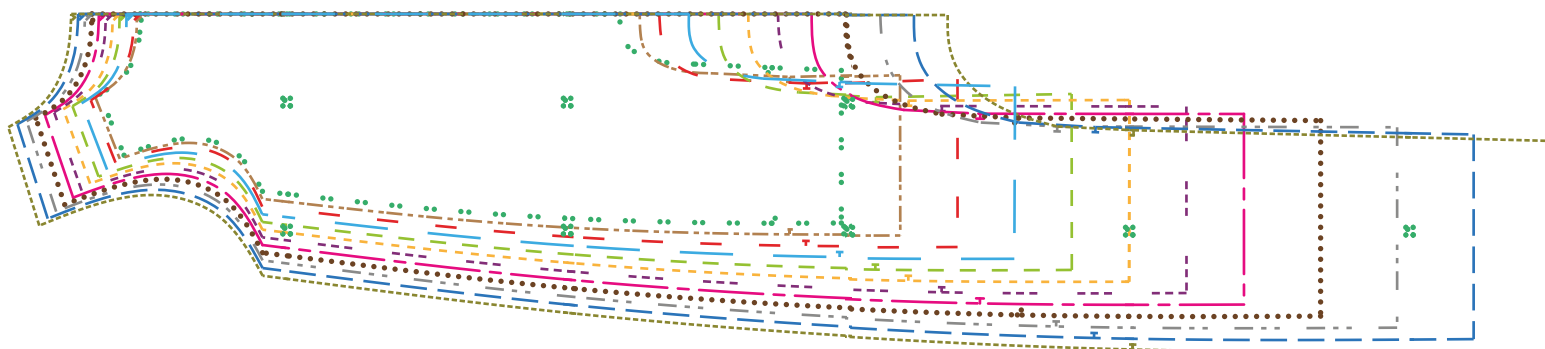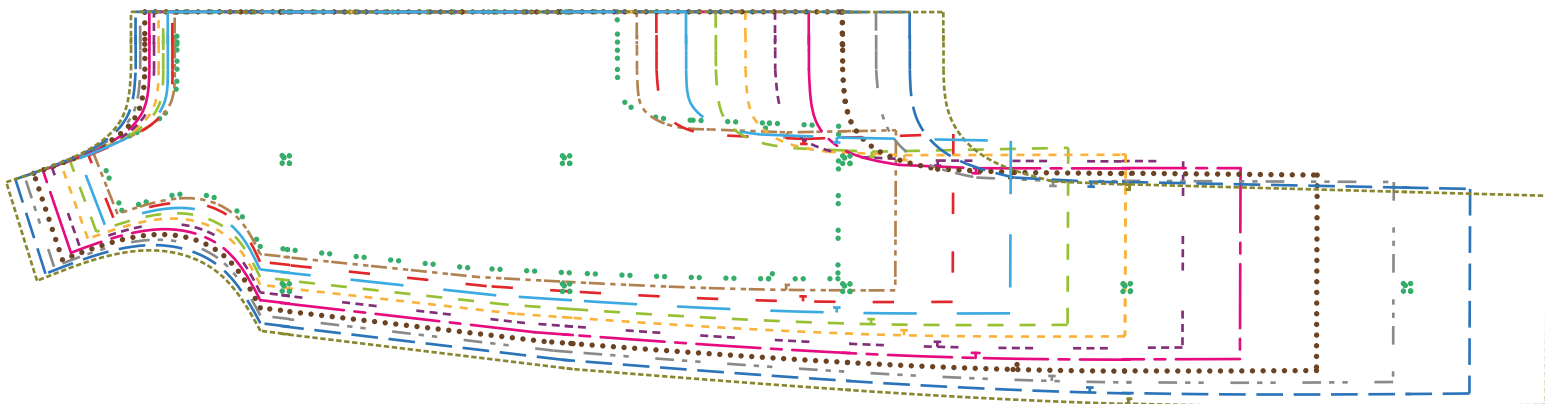

This is what all the pieces will look like after being taped together

Common instructions:

Cut on fold: Place the labeled 'fold line' along the folded edge of the fabric. Cut out the pattern piece through both layers of fabric and open to get a full piece




After being cut out



Full piece opened after being cut out

Fabric folded over

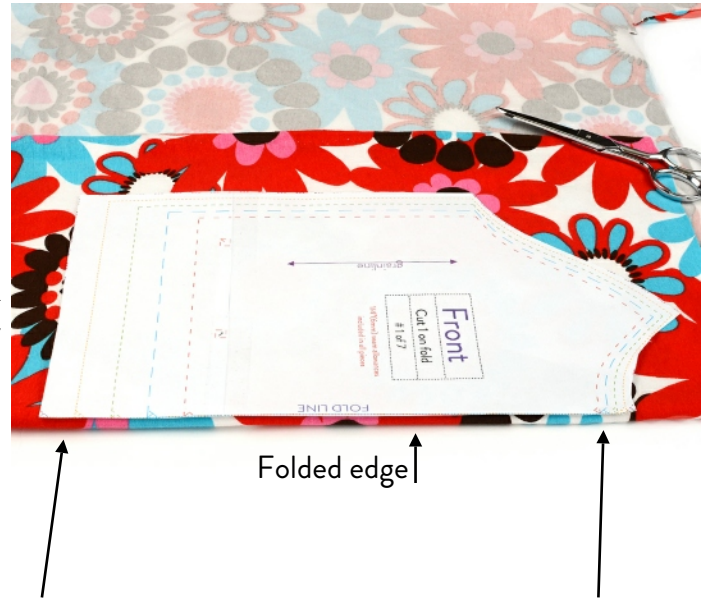

Notch: Needs to be clipped when cutting the pieces out. It will be indicated by a small line at the place that it needs to be marked. Example: center of a pants waist or center neck of a front piece. Mostly used when a piece is cut on the fold. Although, may be used at other times as well. You will make a 1/8" (2mm) cut into the fabric at that point. It will be used to match pieces later.

Cut opposites: For some pieces, a right and a left side need to be cut. Example: Hoods, some pants and some sleeves.

To get the opposite pieces, cut 1 with the pattern facing up like the first photo and 1 with the pattern facing down like the second photo. You can also cut once on a piece of fabric that's been folded over to get 2 layers.




Grainline: Grainline is very important because it affects the way your fabric stretches.

If the grainline is vertical, the stretch is horizontal.

In most cases the stretch should be horizontal 'going around the body' so the grainline should be vertical.

If the grainline isn't easily visible you can see it better when you stretch the fabric .

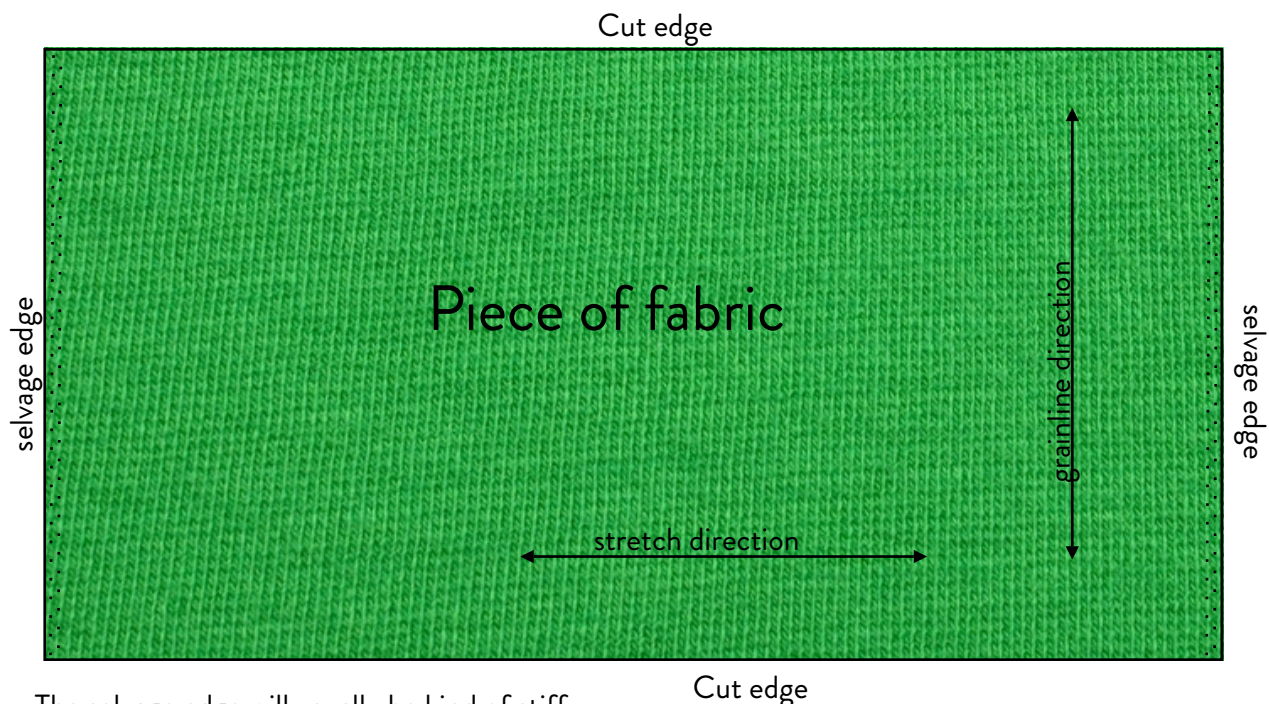

The selvage edge will usually be kind of stiff with some holes in it from the manufacturing process.

The grainline runs parallel to the selvage edge.

Right sides together: Meaning, the right sides of the fabric will be laying together. This is the way most seams are sewn so the seam is on the wrong side of the fabric. Assume that the fabrics will always be right-side-together unless otherwise specified.

1/4"(6mm) seam allowances
included in all pieces

Begin sewing

Step one:

□ Cut out all the pieces from
your main fabric:

- 2 fronts
- 1 back
- 2 sleeves
- 1 neckband

Cut out the interfacing:

- 2 from the pattern piece
- or if you just use a ruler, strips that are
1"(2.5cm) wide x length of center front

Instructions are the same
regardless of which length
you choose to make.

interfacing



sleeves



neckband



fronts



back



Step two:

□ -Iron the interfacing to the
wrong side of the center
front on both front pieces.



Step three:



-Match the front and back shoulder edges and serge them together. Right sides of fabric together.



Step four:



-Fold your neckband in half and clip notches at the center.

notches



-Now fold it in half the long way so wrong sides of fabric are folded together.



-Pin it to the center back neck on the right side of the fabric. Matching the notches on the neckband to the neck notch. All raw edges will be lined up.





- Pin each end of the neckband to the center fronts.



- Serge the neckband to the neck, stretching it to fit.



- From the top, sew the serged seam to the neck, right along the edge of the neckband.



- You'll see the serged seam is sewn flat around the neck now.

Step five:

- Serge down the center front edges. Knot the seam at the top.



Step six:

- Your first sleeve will be placed right side down on the armhole. The sleeve cap notch and the shoulder seam will match up. Pin together. Right sides of fabric will be together.



- Starting at the side seam and edge of sleeve cap, serge the sleeve to the armhole.



- Do the same for the other sleeve.

Step seven:



- Fold the outfit right side together so the side seams are lined up.

- Serge the side seams together in one seam from wrist to ankle.

Step eight:

- Fold the center front edges in toward the inside 1" (2.5cm) to create the snap plackets.

-Optional: You can sew the edges to the front from the top if you like. I choose not to.

- Overlap the plackets by 1" (2.5cm) and pin them together.



Step nine:



-Line up the inseam and serge it closed.

Make sure you catch both plackets in the seam and that they remain overlapped at 1" (2.5cm)



Step ten:



-Fold the leg hems up twice. Fold at about .75" - 1" (2-2.5cm)



-Triple stitch on top of each side seam and inseam to hold it in place.





-Do the same for each sleeve hem. Except you will stitch on top of the serged seam and then, opposite that on the top side of the sleeve.



Step eleven:




-Separate the center plackets and pin each one individually (if you didn't sew them) so they stay folded toward the inside.



-Start by setting your male halves of the snaps. They will be set along the placket that is on the bottom (against the body). Set the first one on the neckband at the top. (the open rings will be on the inside)



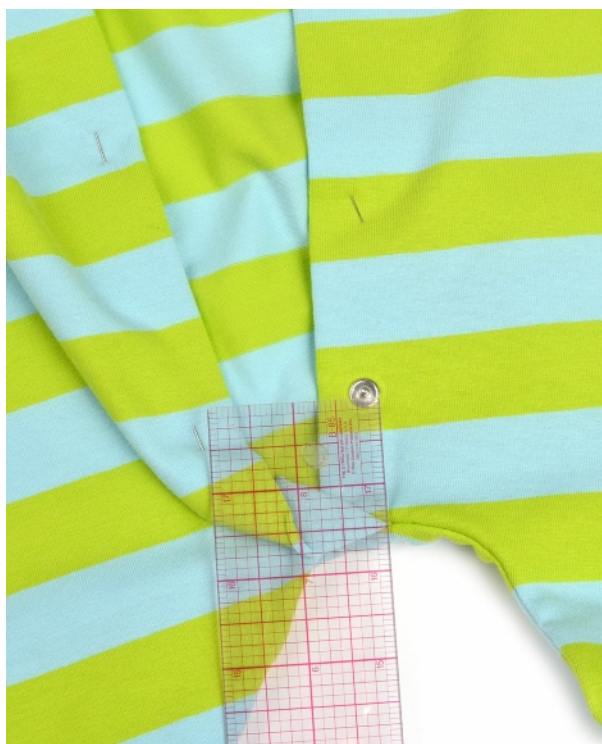

- Set the second male half about 1.5" (3cm) up from the bottom.



- Fold the placket in half, meeting the top and bottom snaps to find the center.



- Set a male half at that center point.



- Fold the placket again to meet the top snap with the middle snap to find that center.



☐ -Set a male half at that center point.



☐ -Fold the placket again to meet the bottom snap with the middle snap to find that center.



☐ -Set a male half at that center point.




☐ -Lay the top placket on top of the male halves to determine the female half placements.

☐ -Set the female halves by placing the open rings on top of the male halves to find the placement.



☐ -Iron the hems and seams and you're done!



Brindille & Twig

[ON THE WEB]

Official website:

Brindilletwig.com

Official Facebook page:

Facebook.com/brindilleandtwigpatterns

If you would like to show off your creations or ask questions of other people using our patterns, join our forums!!

Discuss.brindilletwig.com

www.facebook.com/groups/Brindilleandtwig/

I hope you enjoyed the process and outcome. If you have any questions or suggestions you can contact me on our website OR at:

Melissa@brindilletwig.com

Property of Brindille and Twig 2015

This pattern may not be published on the internet or otherwise, it may not be copied, duplicated or distributed in any form.
This pattern is protected under copyright.