



Выкройки VK

*выкройка платья жен.
р.34-46 (евро)*

2. Etta plaid dress




34-36-38-40-42-44-46

Pages 6-7

MATERIALS

- 200-200-205-205-210-215 cm lightweight plaid cotton-blend fabric (CO/PES/EL), width 140 cm
- 35 cm interfacing, Vlieseline® H 180
- four buttons, ø 14 mm
- (- invisible zipper, length 30 cm, for sizes 40-46)

2. Etta plaid dress...

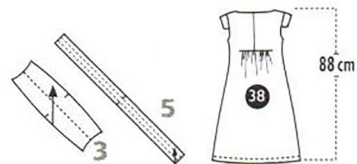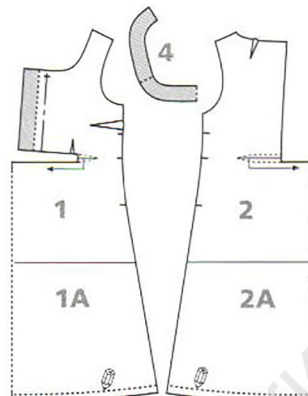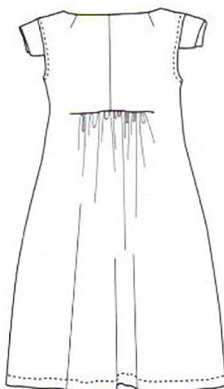

PATTERN PIECES cut

1+1 A front	1
2+2 A back	1
3 shoulder wing	2
4 shaped facing	1
5 armhole facing*	2

PATTERN SHEET A black

CUTTING

Join pattern pieces 1 + 1A and 2 + 2A before cutting. Cut garment pieces from fabric as indicated on list of pattern pieces. Cut shoulder wings on the bias. *Pattern piece for armhole facing includes seam allowances.

SEWING

Construction techniques: Stitch seams with straight stitch and finish them with serger or zigzag stitch.

Stabilizing: Cut interfacings for front placket facings and for shaped facing (see areas shaded in grey on small-scale patterns).

Front placket facings and neckline: Finish raw outer edge and both ends of shaped facing. Press folds at front placket edges as marked on pattern and finish raw inside edges of front placket facings. Stitch ends of shaped facing to inside edges of front placket facings, right sides together. Stitch narrow hems at inside edges of front placket facings. Fold front placket facings to wrong side of front panel. Overlap front placket edges, placing right edge on the outside and aligning center-front marks, and pin them together. Machine-baste bottom ends of front placket edges together.

Joining: Stitch center-back seam and finish seam allowances together. Stitch bust darts on front panel and shoulder darts on back panel. Sew gathering stitches along bottom-half edges of horizontal horizontal seams on front and back as marked on pattern and gather edges to fit upper-half edges of horizontal seams. Stitch horizontal seams (note that seams

taper off toward side seams). Finish seam allowances on horizontal seams.

Stitch shoulder seams. Pin shaped facing to neckline, right sides together, and stitch neckline seam. Clip seam allowances along curves. Understitch neckline seam allowances to shaped facing close to seamline. Fold shaped facing to wrong side of garment and press neck edge gently. Attach outer edge of shaped facing to center-back and shoulder seam allowances. (Zipper: Finish raw side-seam edges on the left of garment. Open invisible zipper. Stitch zipper to left side-seam edges, placing it between notches.) Stitch side seams.

Armholes: Fold each shoulder wing piece in half, right sides together, and stitch its short side edges. Turn shoulder wing right side out, press its folded outer edge and machine-baste its open edges together. Pin and stitch shoulder wings to armholes, right sides together, align-

ing midpoint mark on shoulder wing with garment's shoulder seam.


Stitch ends of each armhole facing together to form circles. Pin and stitch one edge of facing to armhole, right sides together and with shoulder wing in between. Trim seam allowances even and clip them along curved portions of armholes. Understitch seam allowances to armhole facing close to seamline. Turn seam allowance on free edge of facing under, pin facing to wrong side of armhole and stitch it in place close to turned-under edge.

Finishing: Fold up, pin and stitch garment's bottom hem as marked on pattern. Stitch buttonholes and sew buttons at front placket edges, placing top buttonhole 1.5 cm down from neckline seam, bottom buttonhole 4 cm up from horizontal seam and the rest at regular intervals between these.

3. Cordelia cotton dress

34-36-38-40-42-44-46

Page 5

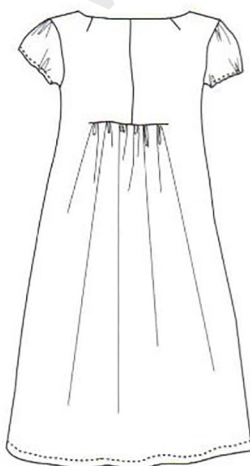


MATERIALS

- 215-220-220-220-225-225-230 cm lightweight printed cotton voile (CO), width 135 cm
- 35 cm interfacing, Vlieseline® G 785
- four pearl buttons, ø 15 mm
- 62...85 cm elastic, width 10 mm
- (- invisible zipper, length 30 cm, for sizes 40-46)

PATTERN PIECES cut

1+1 A front	1
2+2 A back	1
6 sleeve	2
4 shaped facing	1

PATTERN SHEET A black

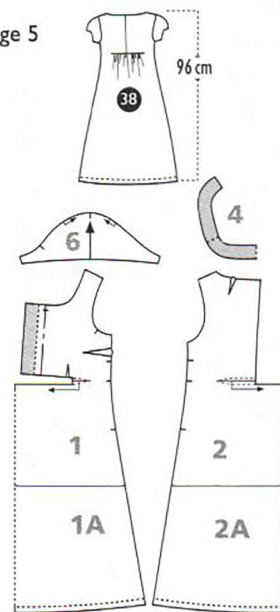

CUTTING

Join pattern pieces 1 + 1A and 2 + 2A before cutting. Cut garment pieces from cotton fabric as indicated on list of pattern pieces.

SEWING

Construction techniques: Stitch seams with straight stitch and finish them with

serger or zigzag stitch.

Stabilizing: Cut interfacings for front placket facings and for shaped facing (see areas shaded in grey on small-scale patterns).

Front placket facings and neckline, Joining: Follow instructions for design no. 2.

Sleeves: Stitch underarm seams of sleeves.

Finish raw bottom edges of sleeves. Cut elastic in half. Adjust pieces of elastic to fit around your arms. Stitch ends of each elastic together to form circles and mark both elastics and sleeve edges into halves. Machine-baste elastics to wrong side of sleeve-edge hem allowances, placing them close to sleeve edge. Fold sleeve-edge hem allowances with elastics to inside of sleeves and stitch them to sleeves along

outer edge of elastic, stretching elastic as you sew.


Sew gathering stitches along sleeve caps and gather sleeves to fit armholes. Pin and stitch sleeves to armholes, right sides together.


Finishing: Follow instructions for design no. 2.

3X3

46
44
42
40
38
36
34

1. Перед

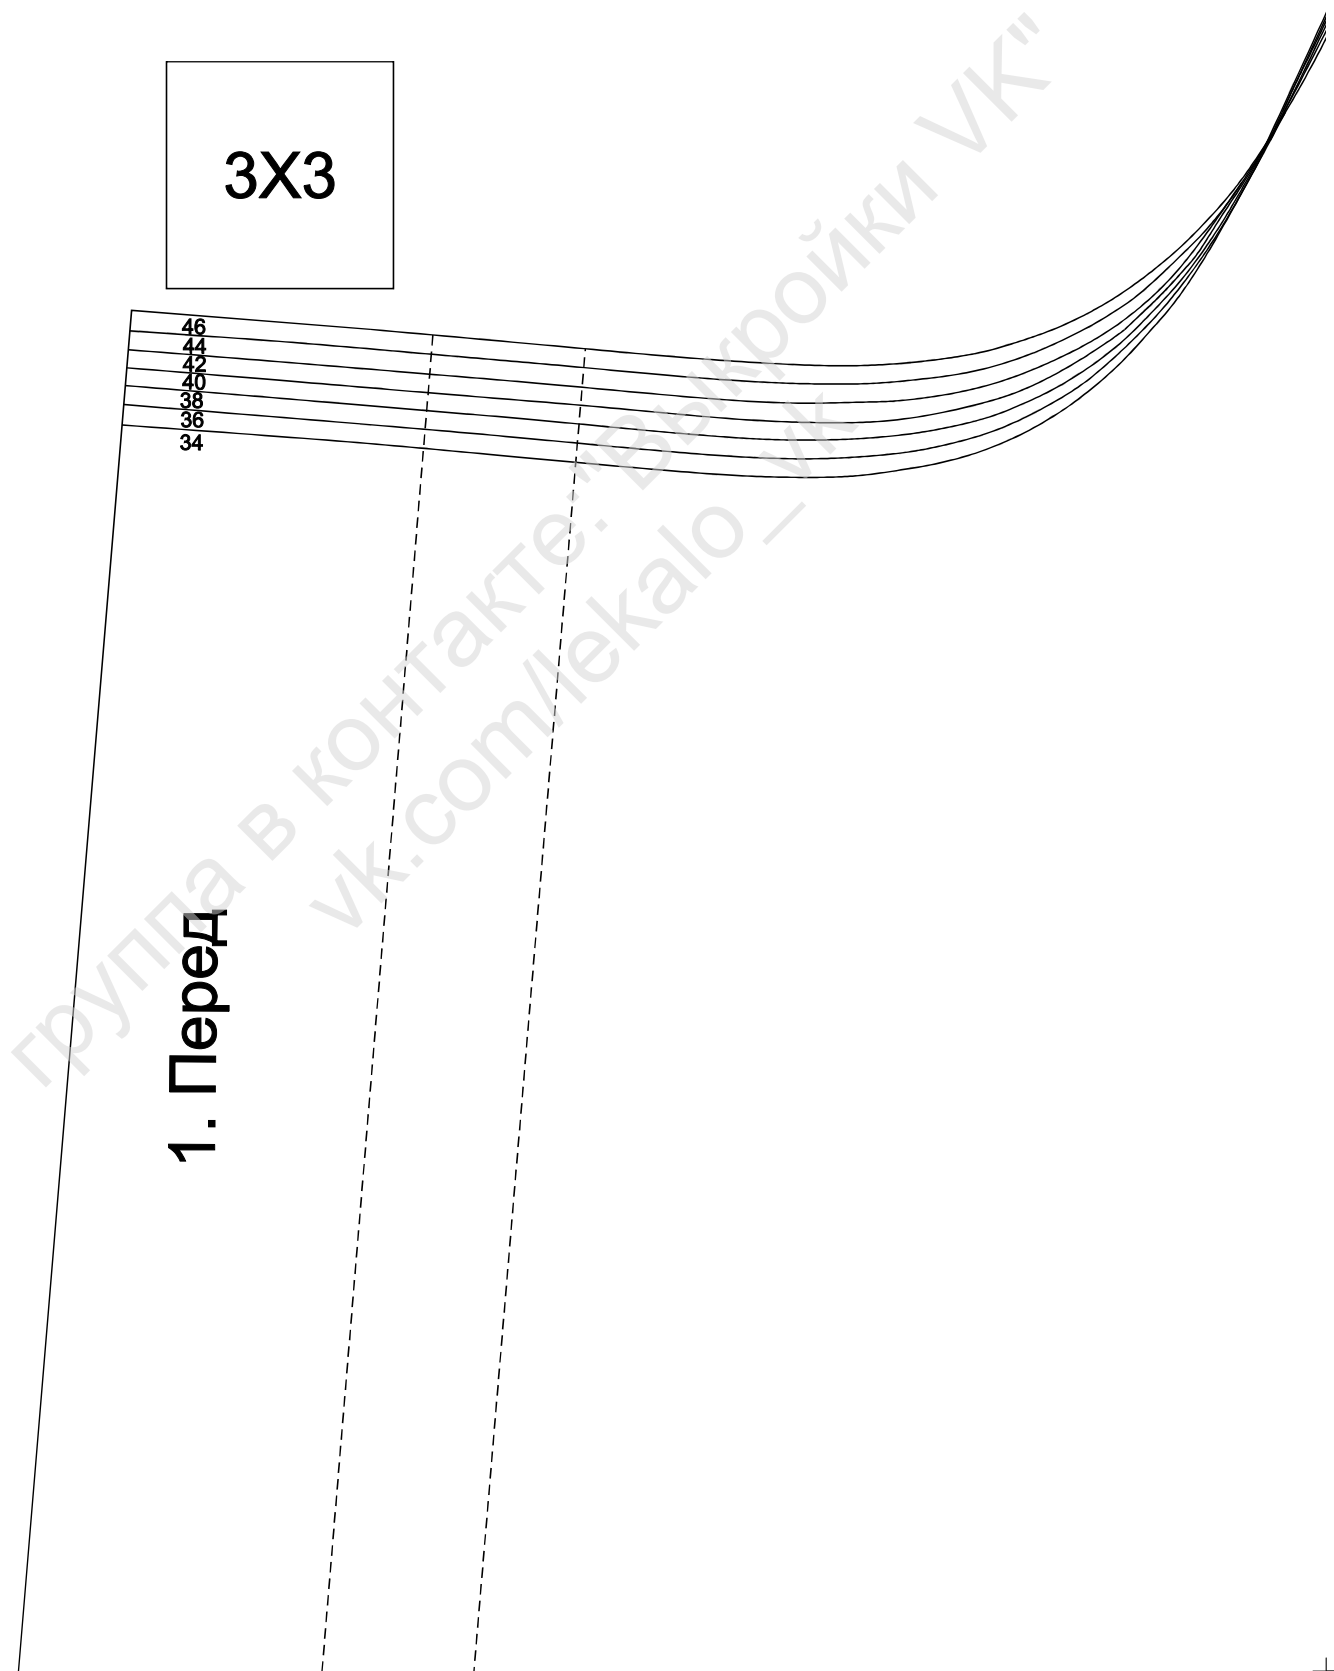

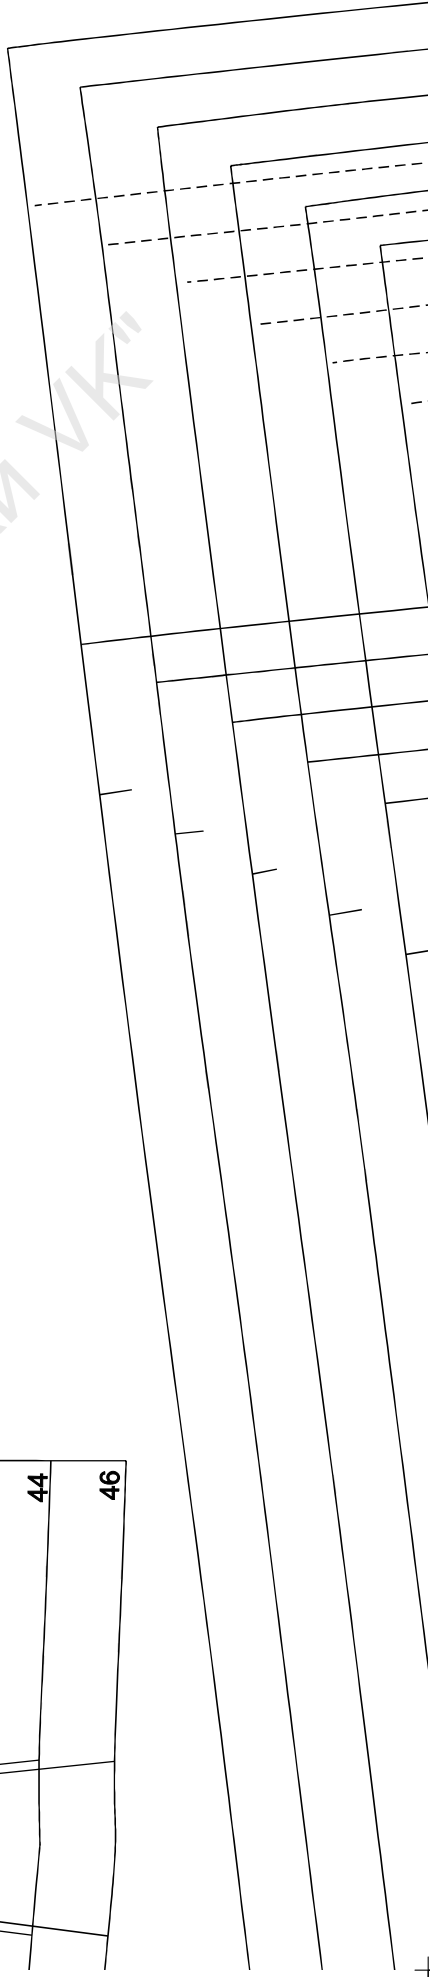

	34
	36
	38
	40
	42
	44
	46


2А. Спинка

группа в контакте: "Выкройки VK"
vk.com/lekalovk

Длина платья мод. 2

- 34
- 36
- 38
- 40
- 42
- 44
- 46

группа в контакте: "Выкройки VK"
vk.com/lekalovk

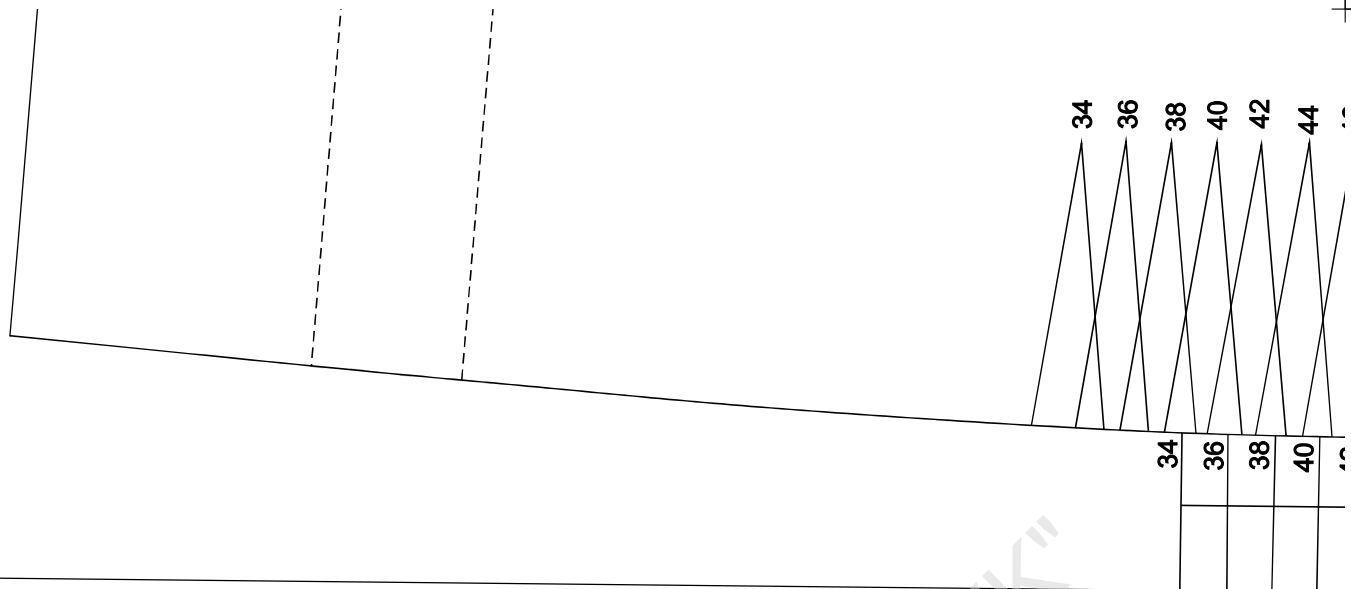

группа в контакте: "Выкройки VK"
vk.com/lekalovk




46

42	44	46
34	36	38
40	42	44
46		

46

44

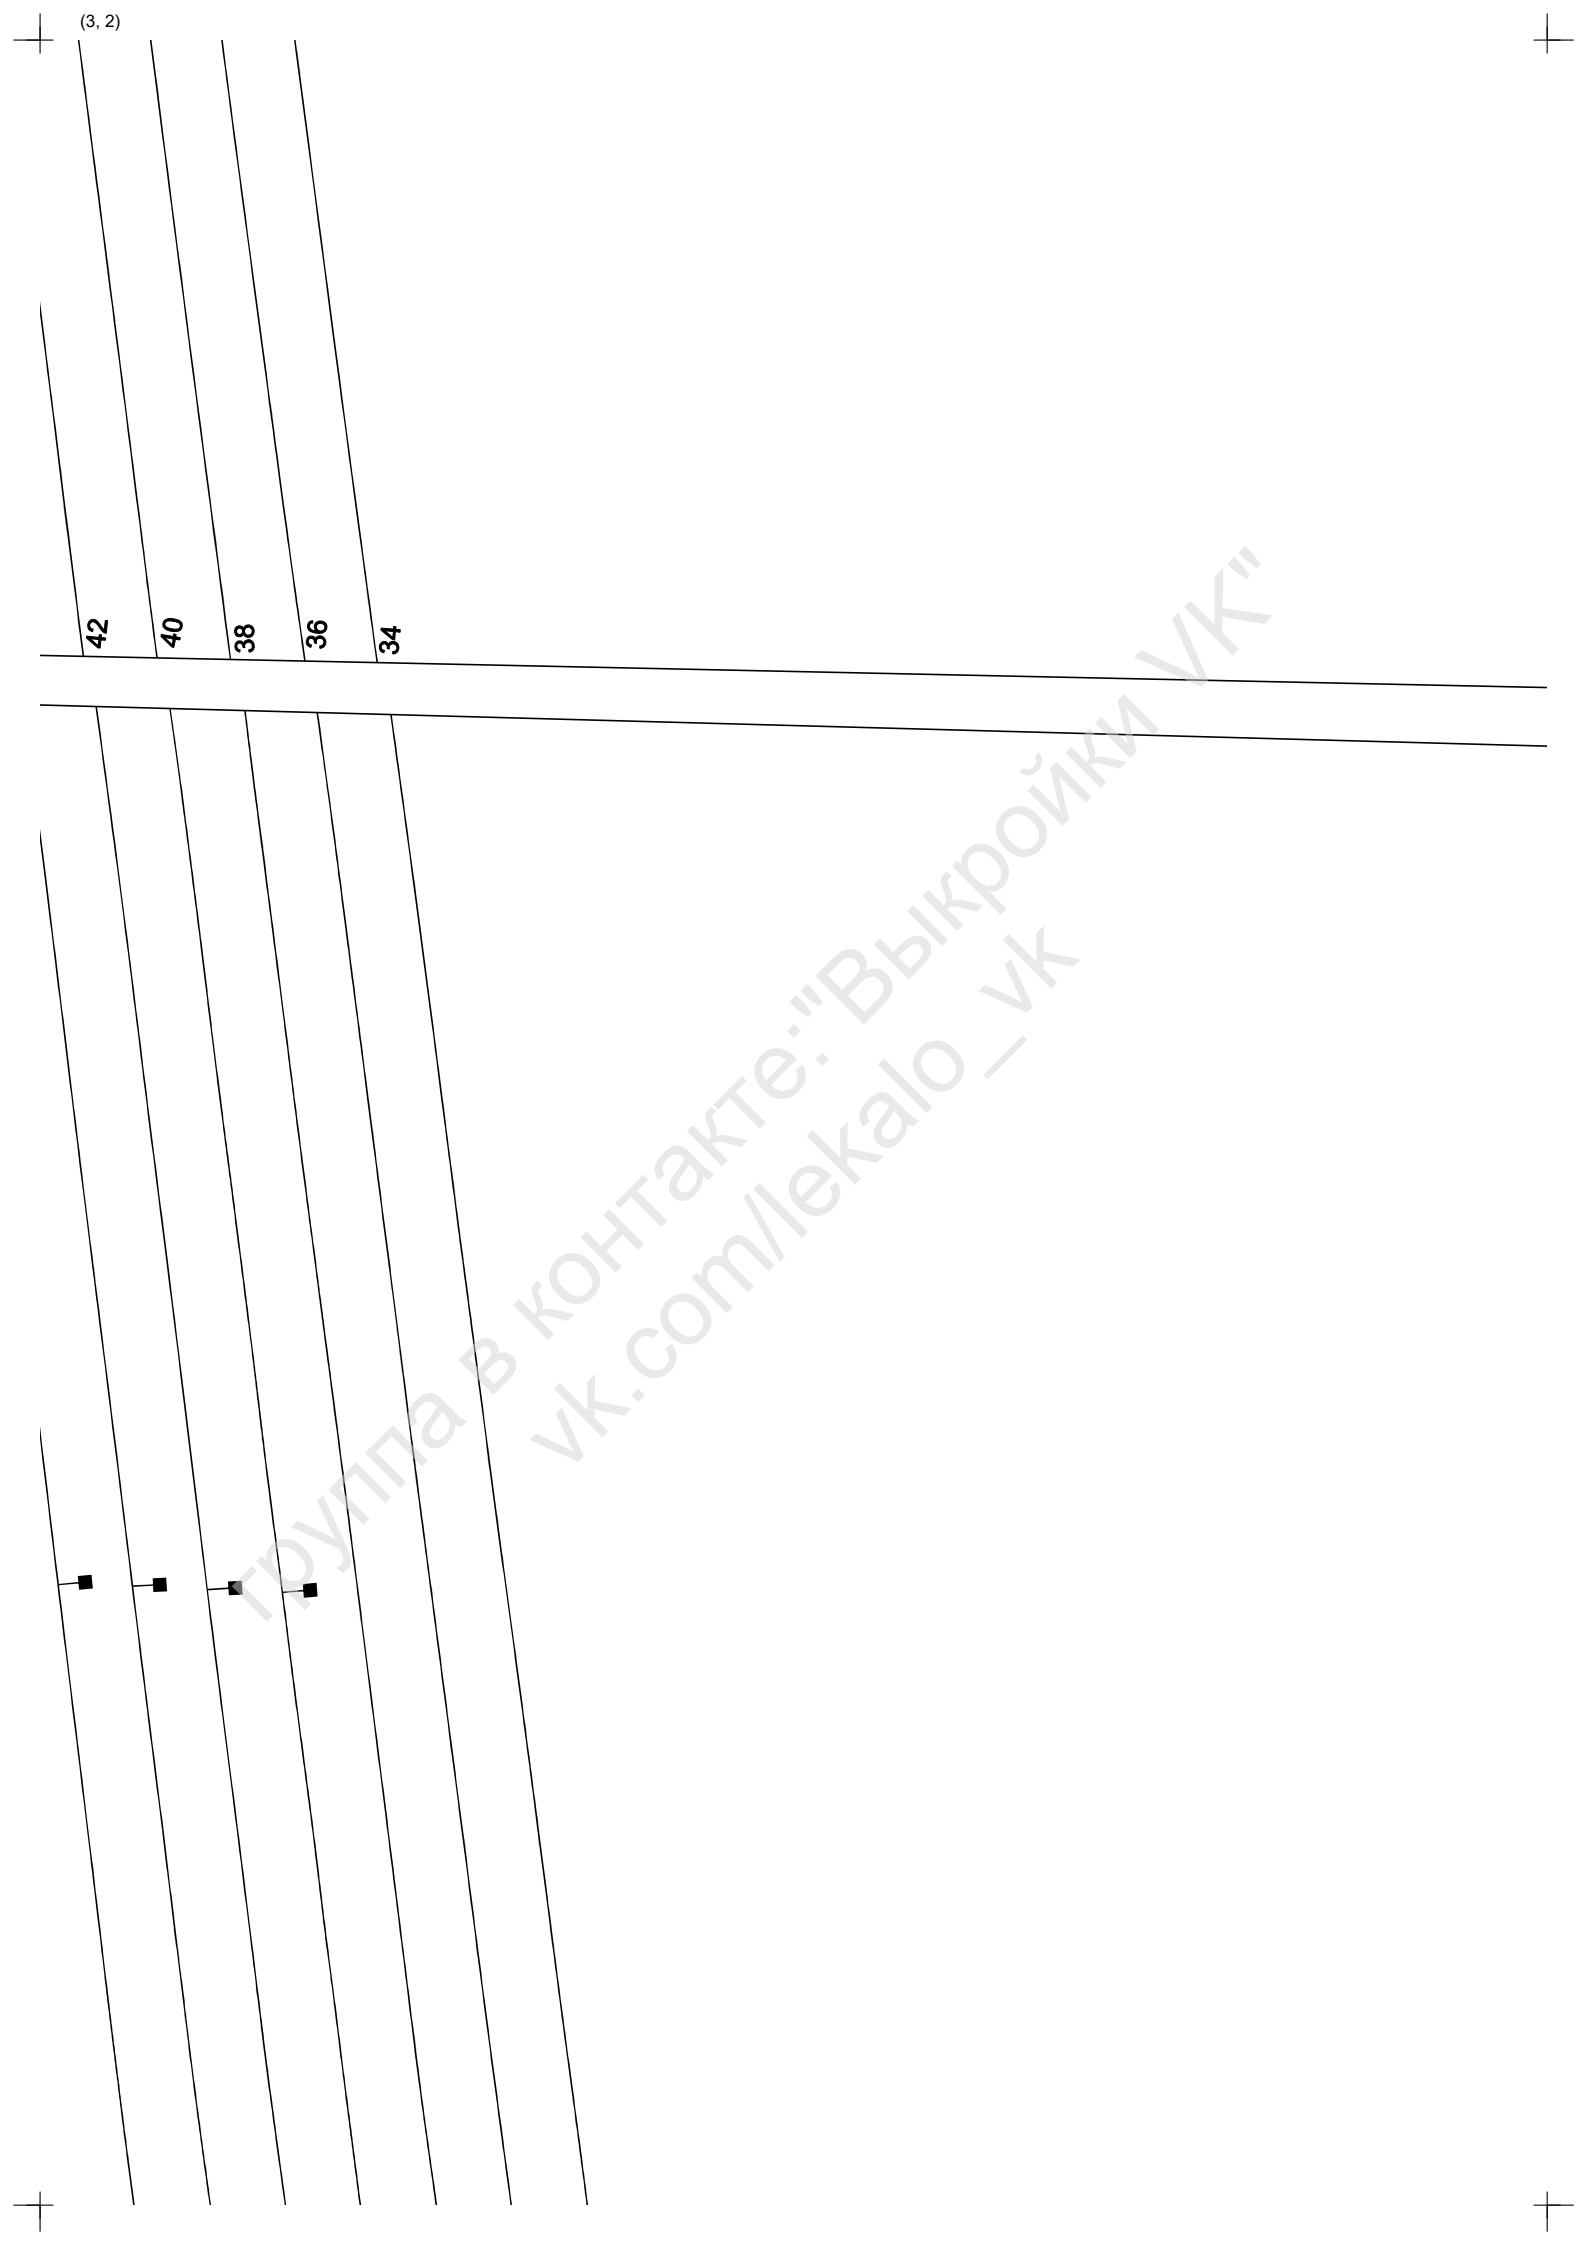

42

40

38

36

34



группа в контакте: "Выкройки VK"
vk.com/lekalovk

группа в контакте: "Выкройки VK"
vk.com/lekalovk

34

36

38

40

42


44

46

группа в контакте: "Выкройки VK"
vk.com/lekalovk

2.Спинка

46
44
42
40
38
36
34

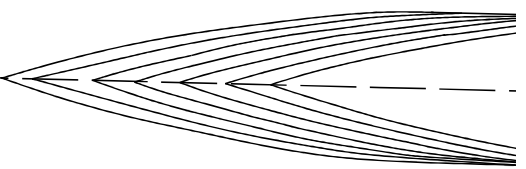

Группа в контакте: "Выкройки VK"
vk.com/lekalovk

(3, 3)

группа в контакте: "Выкройки VK"
vk.com/lekalovk



34

36

38

40

42

44


46


группа в контакте: "Выкройки VK"
vk.com/lekalovk




группа в контакте: "Выкройки VK"
vk.com/lekalovk

(3, 4)

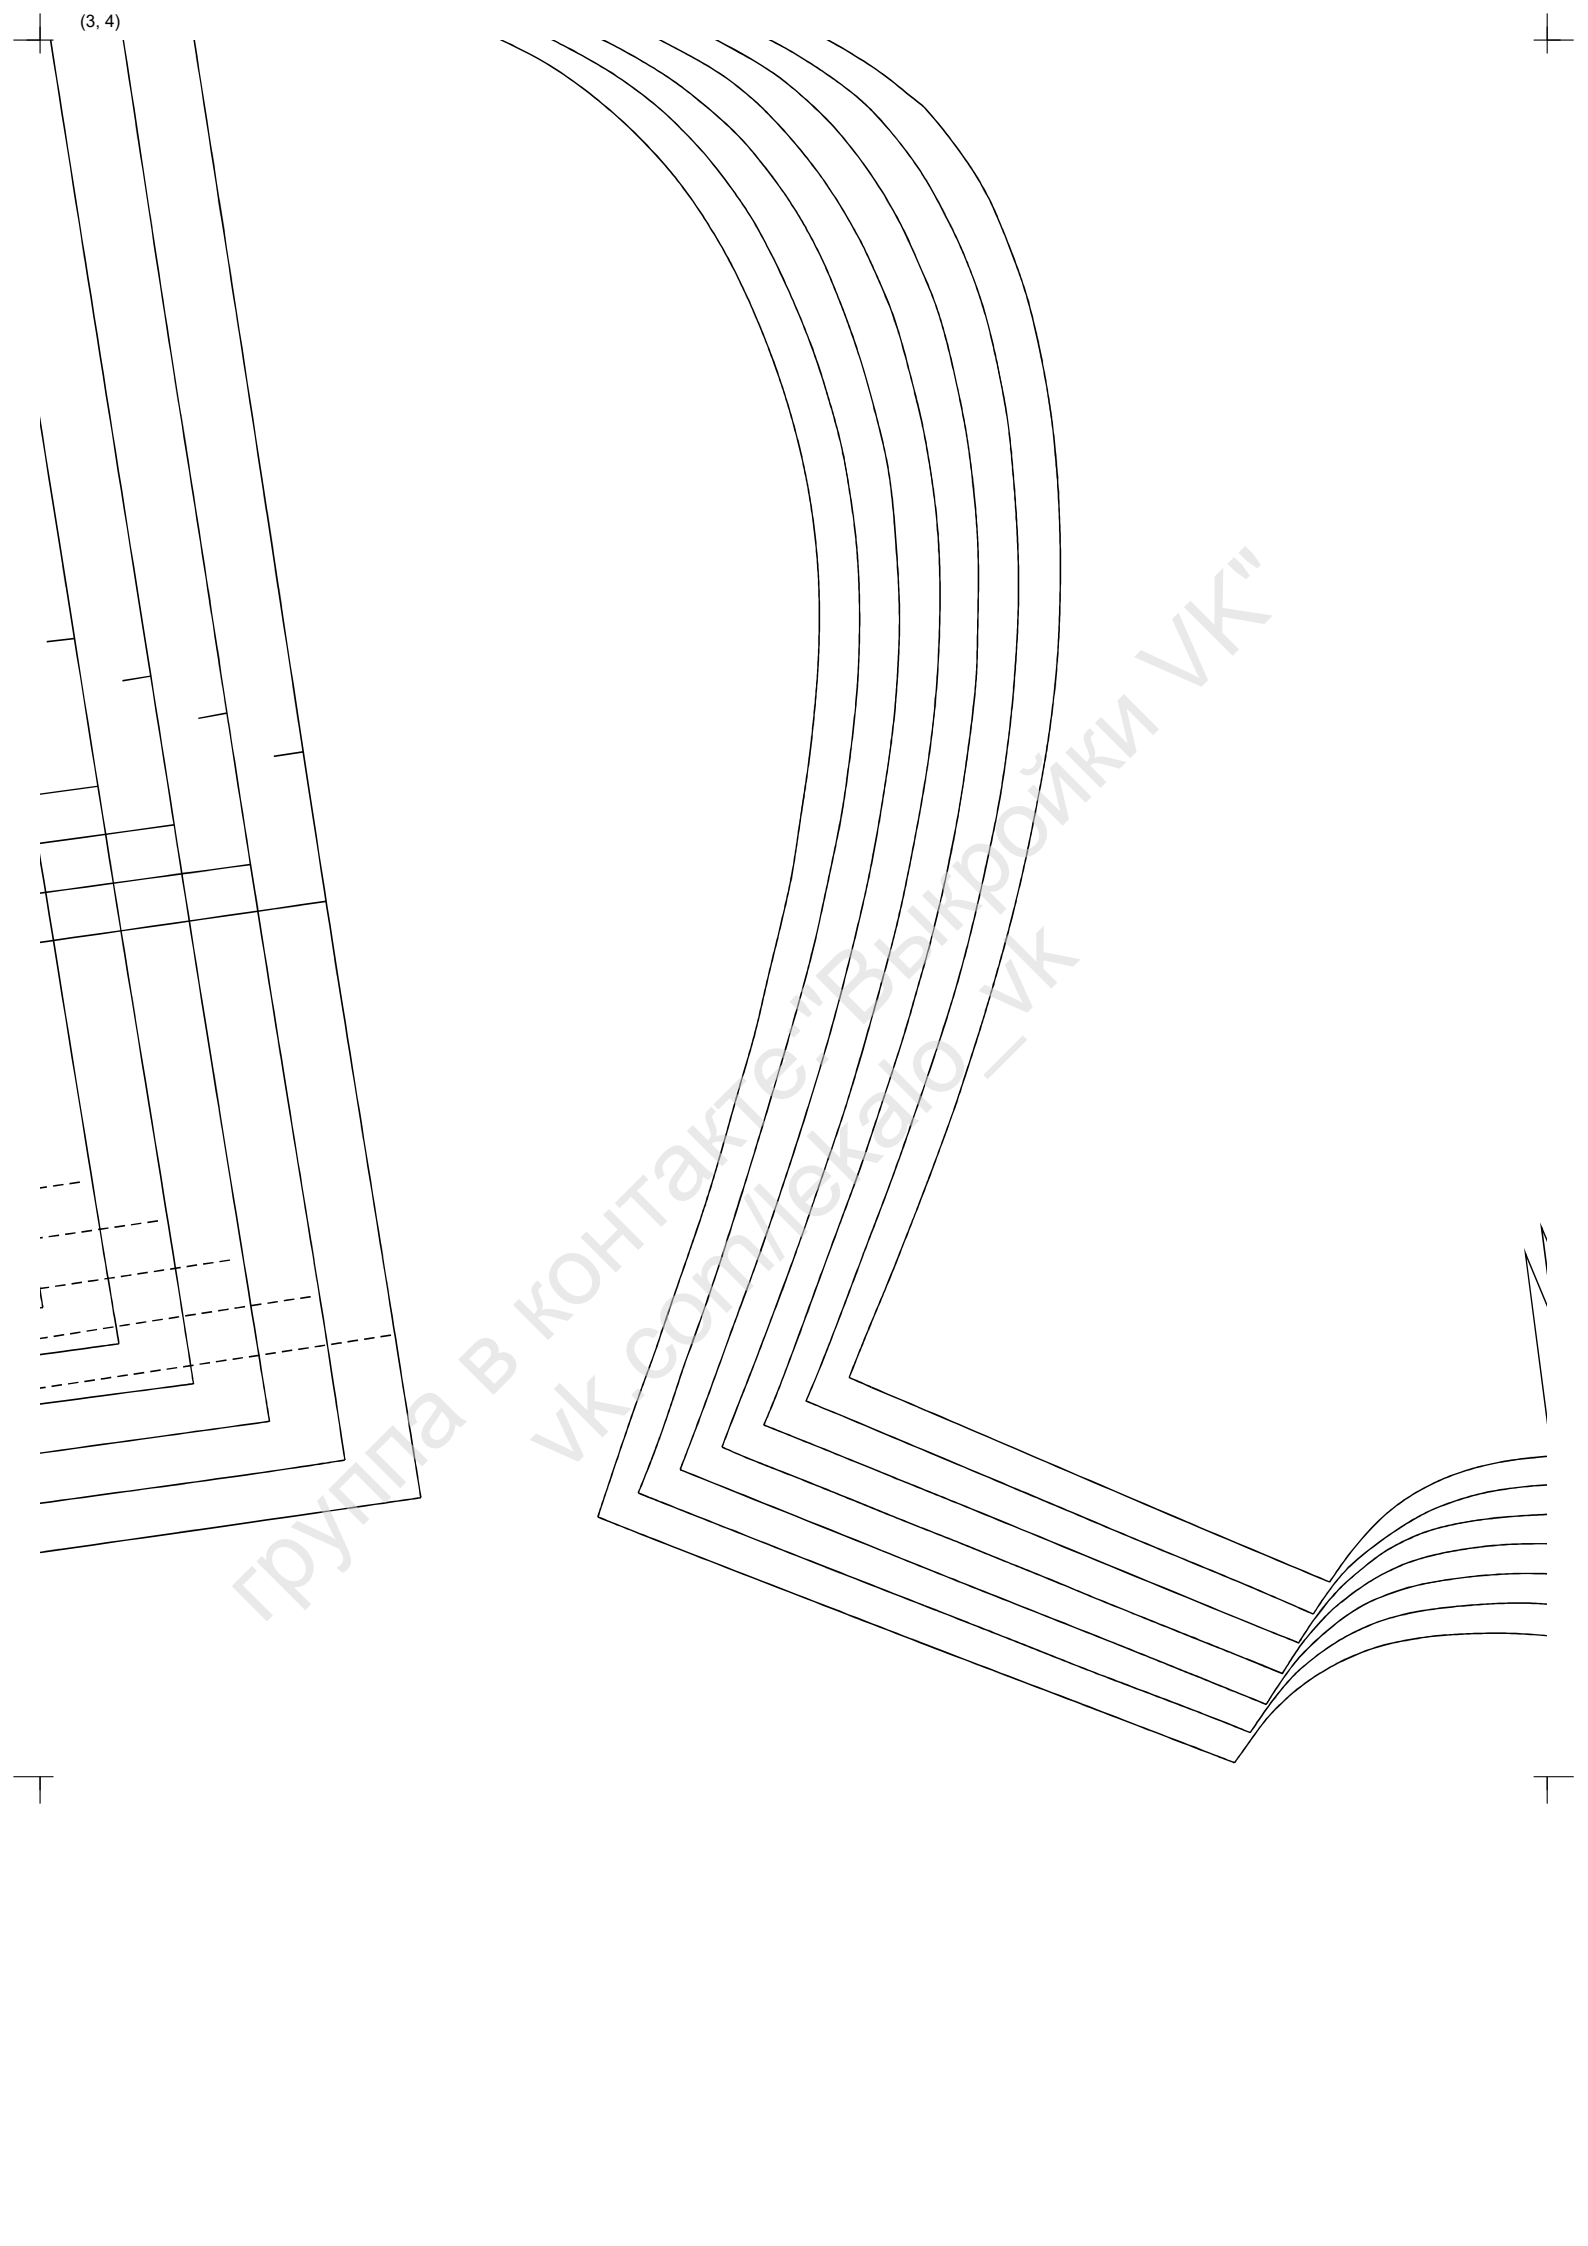

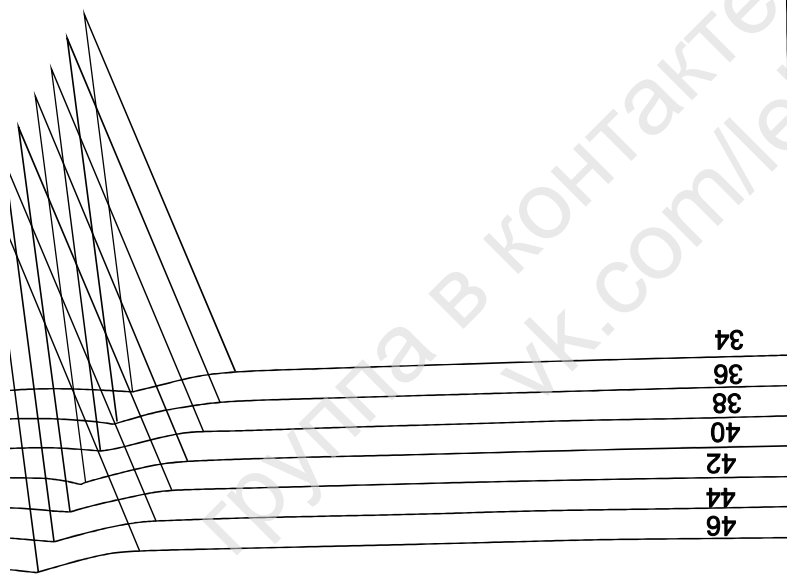


группа в контакте: "Выкройки VK"
vk.com/lekalovk

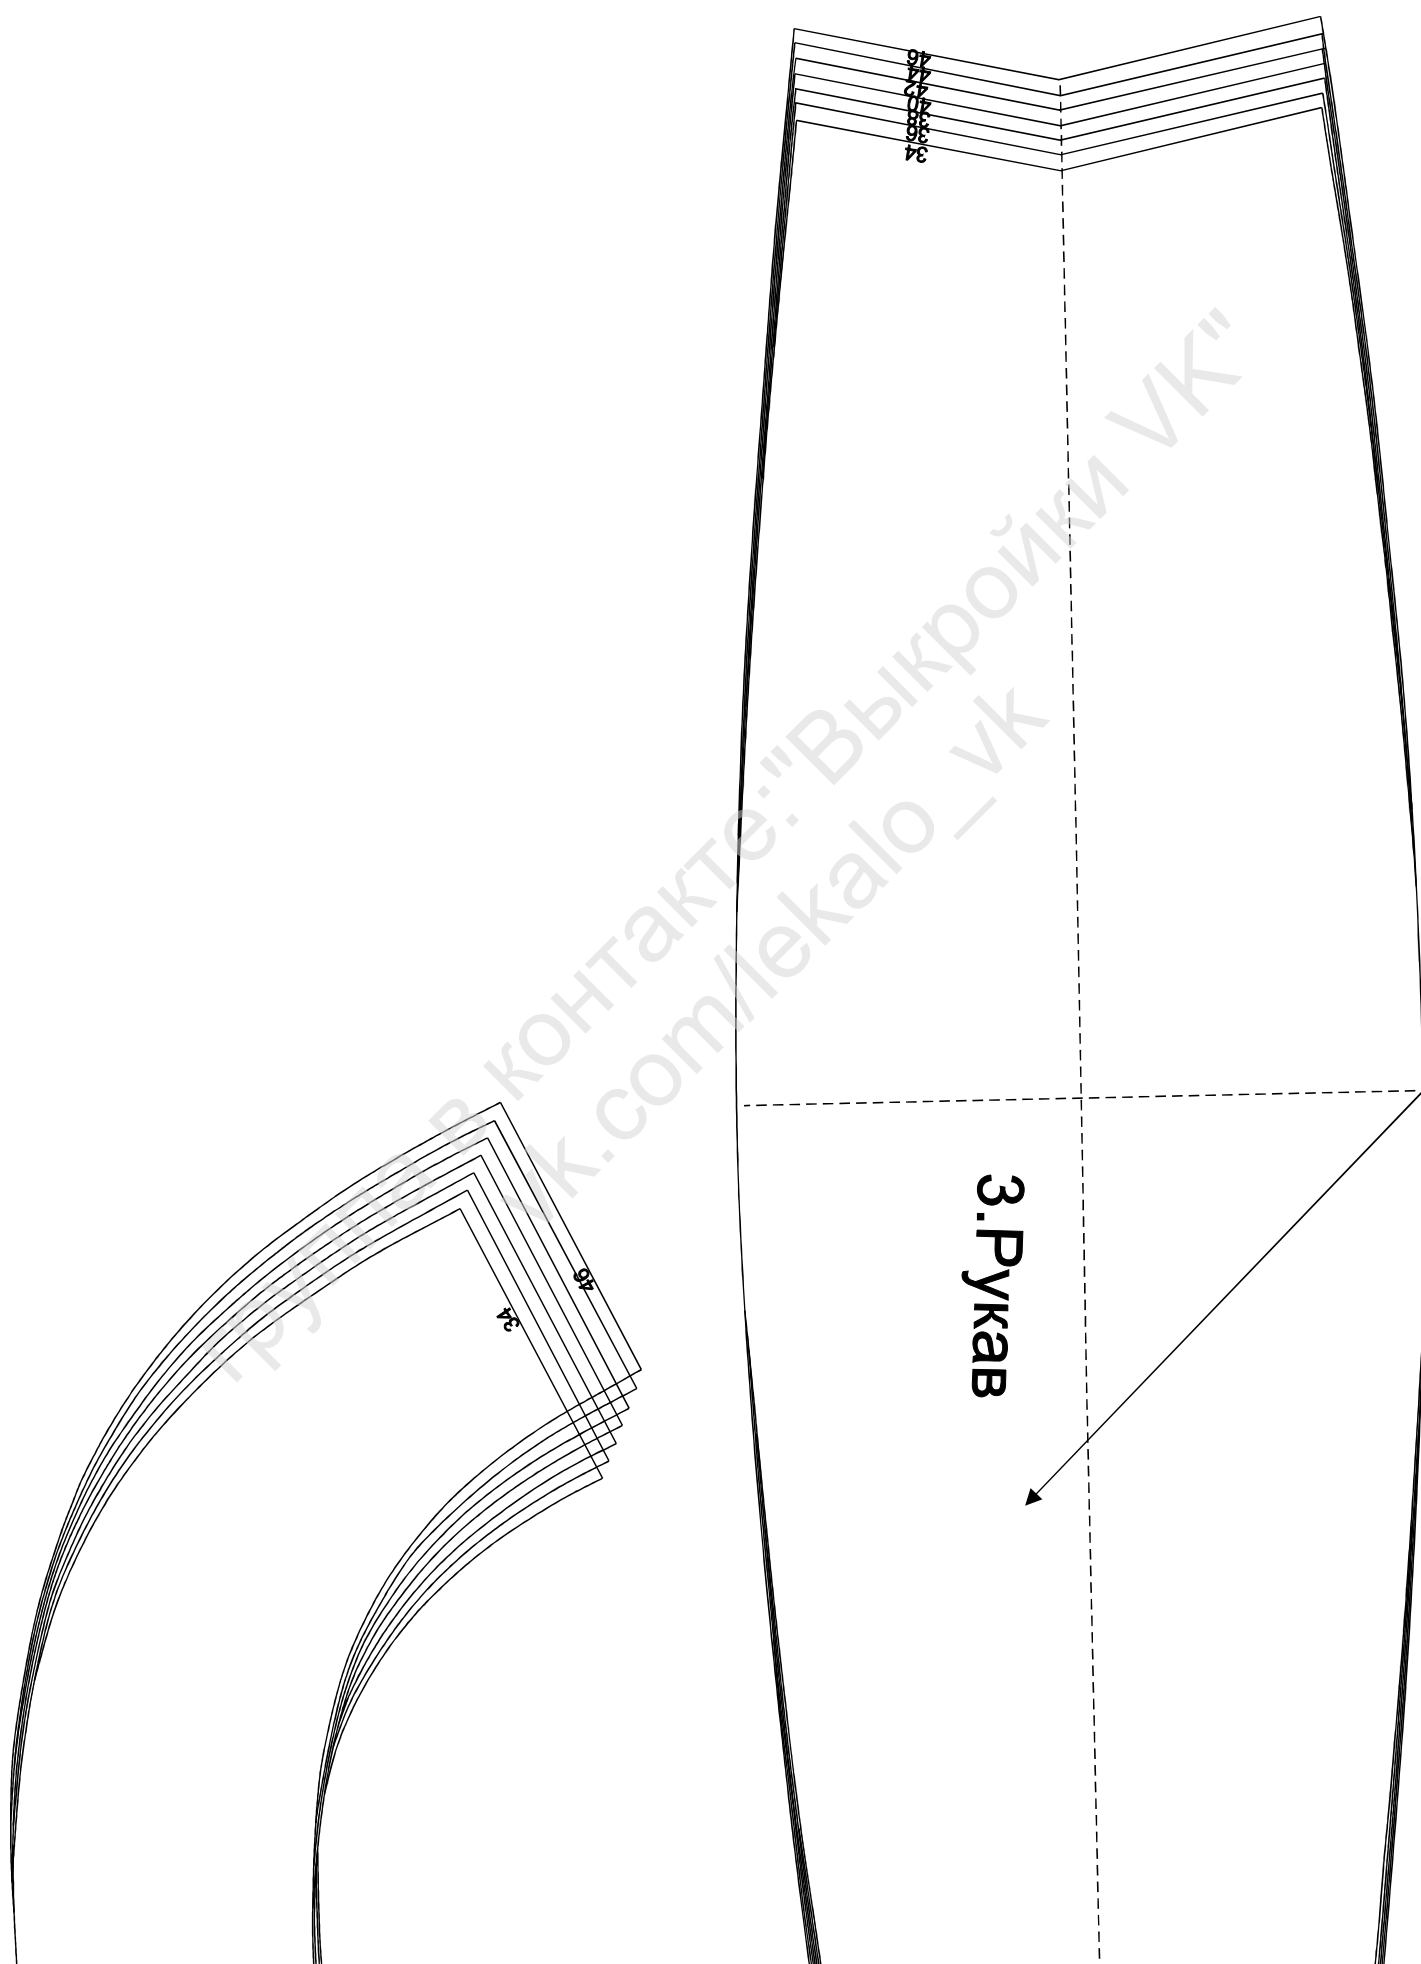

46

Technical drawing of a roof truss system, showing a cross-section with various structural elements and dimensions. The drawing includes a central vertical line, a horizontal line, and several curved lines representing the roof structure. Dimensions are indicated by numbers and lines, such as 100, 200, 300, 400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500, 1600, 1700, 1800, 1900, 2000, 2100, 2200, 2300, 2400, 2500, 2600, 2700, 2800, 2900, 3000, 3100, 3200, 3300, 3400, 3500, 3600, 3700, 3800, 3900, 4000, 4100, 4200, 4300, 4400, 4500, 4600, 4700, 4800, 4900, 5000, 5100, 5200, 5300, 5400, 5500, 5600, 5700, 5800, 5900, 6000, 6100, 6200, 6300, 6400, 6500, 6600, 6700, 6800, 6900, 7000, 7100, 7200, 7300, 7400, 7500, 7600, 7700, 7800, 7900, 8000, 8100, 8200, 8300, 8400, 8500, 8600, 8700, 8800, 8900, 9000, 9100, 9200, 9300, 9400, 9500, 9600, 9700, 9800, 9900, 10000. The drawing is labeled with 'Группа в контакте: "Выкройки VK"', 'vk.com/lekalovk', and 'VK'.

группа в контакте: "Выкройки VK"
vk.com/lekalovk

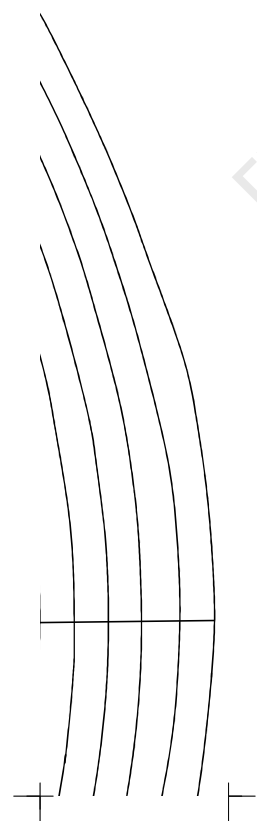

4.Обтачка горловины


1
2
3
4
5
6
7
8
9
10

1
2
3
4
5
6
7
8
9
10

группа в контакте:"Выкройки VK"
vk.com/lekalovk

46	
44	
42	
40	
38	
36	
34	

6.Рукав

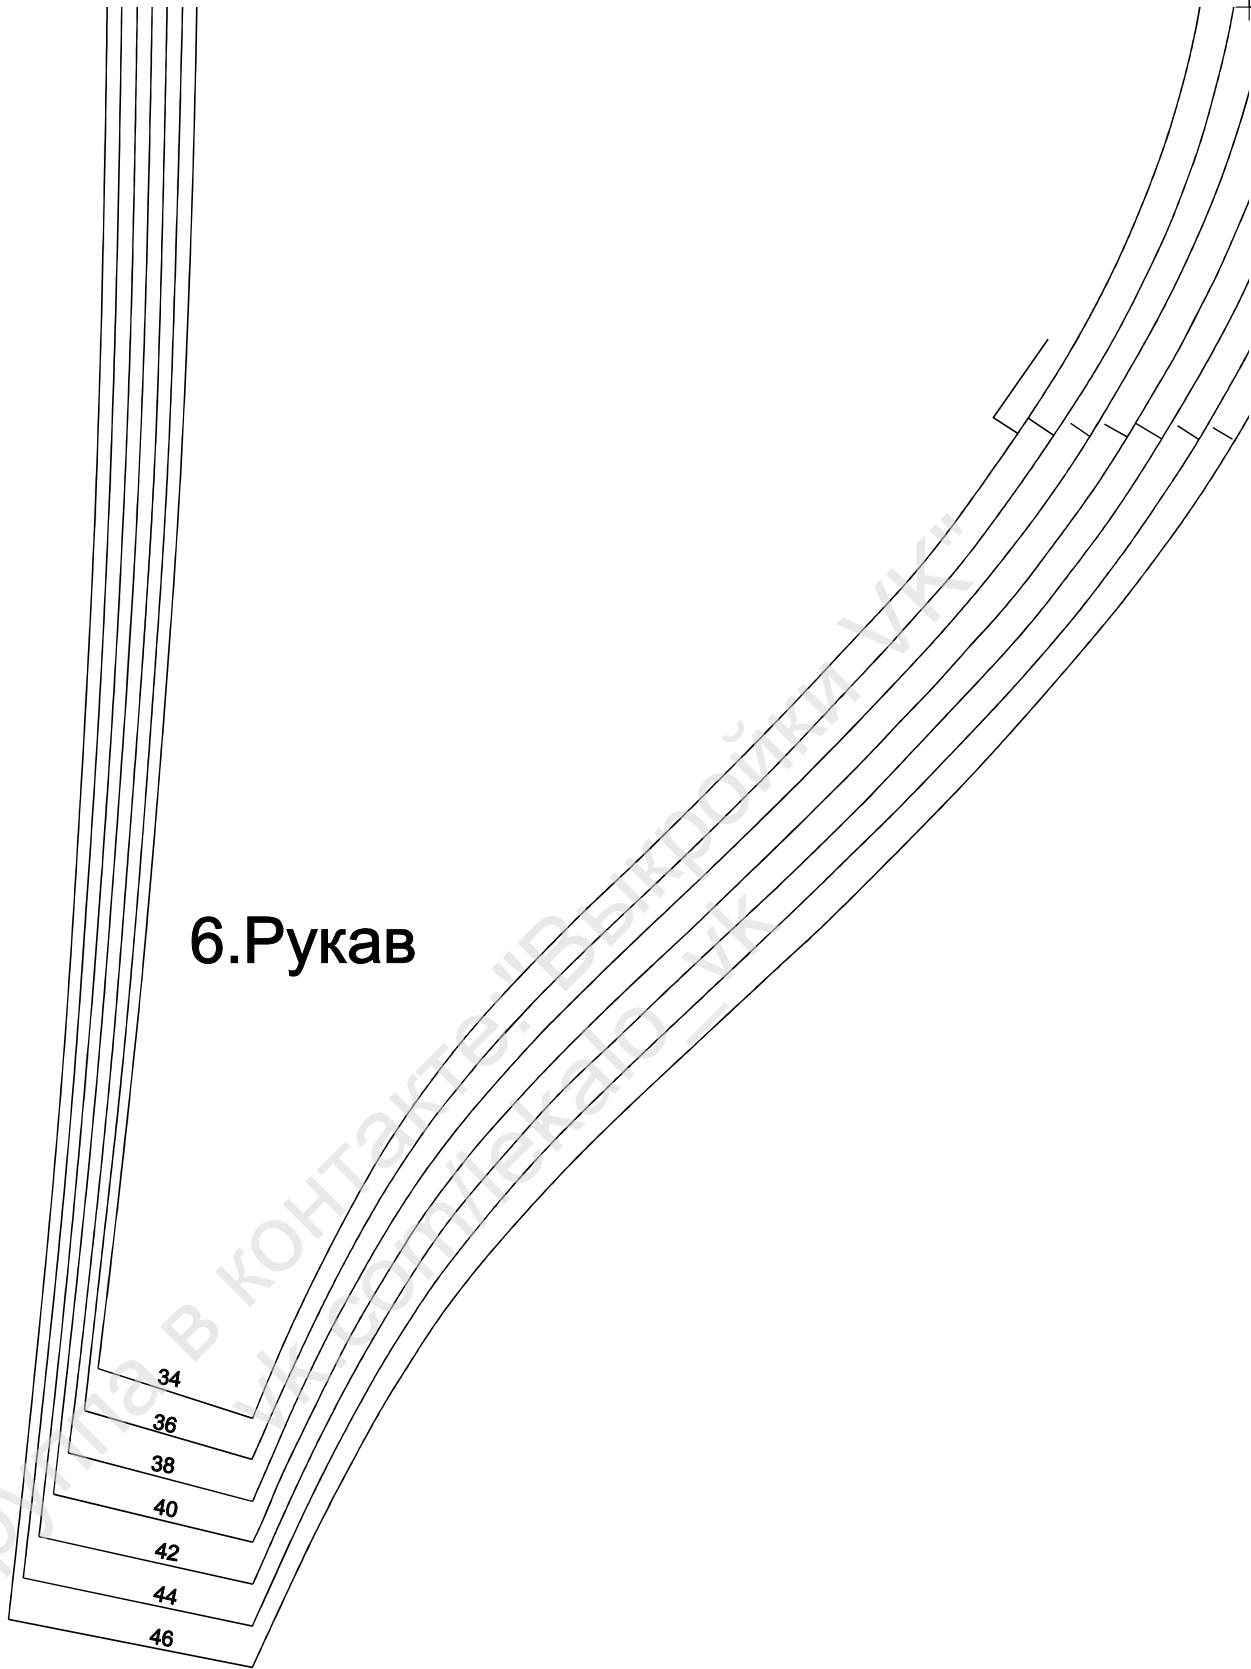

(3, 2)

группа в контакте: "Выкройки VK"
vk.com/lekalovk