

# *New Tailoring*

THE NEW SILHOUETTES PLAY WITH A WIDE NONCHALANCE. THE ONCE CLASSIC OFFICE LOOK GETS A CONTEMPORARY UPGRADE. THE FOCUS IS ON THE BLAZER, WHICH APPEARS AS AN IT-PIECE AND IS NOT ONLY COMBINED WITH TROUSERS OR SHORTS, BUT ALSO WITH A DRESS OR SKIRT.






#### **120-13 Blazer "Pia"**

The lady's blazer is slightly oversized, similar to menswear; the wrap-around look gives the whole outfit a more feminine and casual character.



#### **120-14 Shorts "Anne"**


The slightly longer and wider cut Bermudas with pleats are part of the new look. In duet with the blazer, the leisure trousers are now even suitable for the office.



## 120-13 Blazer "Pia"

Sizes 36–48

Pieces 20–29 on pattern sheet C

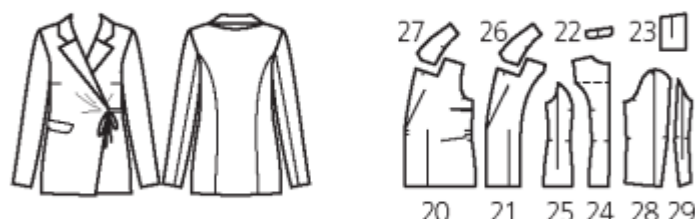

### Supplies

- 2.1–2.3 m jeans fabric "Gina", 135 cm wide (Hilco)
- Fabric lining G 700 (Vlieseline)
- Optional BERNINA accessories
- [Edgestitch foot 10](#)

### Cutting

- 20 2 × front part
- 21 2 × front part facing
- 22 2 × flap
- 23 2 × pocket bag
- 24 1 × centre back part on the fold
- 25 2 × side back part
- 26 1 × upper collar on the fold
- 27 1 × lower collar on the fold
- 28 2 × upper sleeve
- 29 2 × lower sleeve

**Allowances:** We recommend 1 cm for all dividing seams and outer edges of collar/facings, 1.5 cm for side and lower arm seams and 4 cm for hems.

Tie band 70 up to 80 × 4 cm and 50–60 × 4 cm, final width 2 cm.

### Instructions


1. Iron the Vlieseline on the facings, one of the flaps and the lower collar. Close the darts on the front part. Attach a flap pocket on the right front part as described on the **Tips pages**.
2. Close the dividing seams along the back part. Iron the allowances towards the centre back part and topstitch them. Close the shoulder seams of the blazer and the facings. Place the allowances into the back part and topstitch them. Iron the allowances of the facing to the front.
3. Sew the tie bands, pin the longer one to the marking of the left side seam, and the shorter one on the front edge of the right front part. Close the side seams.
4. Sew the lapel collar as described on the **Tips pages**. Iron up the hem and topstitch it.
5. Close the seams of the upper sleeves, place the allowances inwards, and topstitch them. Close the seam of the lower sleeves. Gather the top shaping, sew the sleeves in and hem them.
6. Sew the edges of the facing to the armhole and fix the pocket with a few hand stitches.



## 120-14 Shorts "Anne"

Sizes 36–48

Pieces 30–34 on pattern sheet C



### Supplies

- 0.9–1.3 m jeans fabric "Gina", 135 cm wide (Hilco)
- 1 zip, 12–16 cm
- Fabric lining G 700 (Vlieseline)
- 3 buttons, 18 mm in diameter (Union Knopf)

Optional BERNINA accessories

- BERNINA overlocker machine

### Cutting

30 2 × front part

31 2 × back of the pocket

32 2 × pocket bag

33 2 × back part

34 4 × waistband (if desired for the outer waistband, cut the paper parts for the middle rear waistband as a separate waistband part)

34 4 × decorative belt parts

4 piping strips for the front pockets 14 × 5 cm, 2 piping strips for the bottom pocket 13 × 4 cm, each including allowances.

Slit facing 14 up to 18 × 6.5 cm, final width 3.2 cm.

Belt latch approx. 32 × 2.5 cm, final width 1.2 cm and 8 × 12 cm, each including allowances.

### Instructions

1. Iron the Vlieseline on the waistband, the flap and the pocket mouths and let them cool off thoroughly.
2. Close the rear darts. Sewing the fake bottom pocket: Draw the pocket line on the right side of the fabric. Pin both piping strips right side to right side on the pocket line and sew them on. The distance between the stitch line is 1.5 cm. Clip the pocket line in the outer fabric, towards the seam ends cut diagonally so that little triangles are left. Pull the pocket bag and the little triangles inwards.
3. Iron the allowances of the upper seam upwards and the lower allowances apart. Fold the lower piping strip so that the cut is filled out completely. Fix the piping with pins. Narrow-topstitch the fake pocket on the trousers all along. Cut the piping strips evenly and finish them.

4. Sewing the pockets on the front part: Sew the piping strip on as described until point 2. Fill the opening with piping facing the centre front and topstitch the front edge. Iron the other piping to the side. Sew the pocket bag on the piping facing the front centre. Pin the back of the pocket exactly under the front part. Topstitch the loose long edge of the sewn-on pocket bag above and beneath the pocket mouth. Close the pocket bag.
5. Fold up the pleats and sew them as marked. Pin the pleat on the pocket bag. Pin the pocket bag and the front part on top of each other along the allowances. Close the side seams.
6. Close the front centre seam beneath the slit marking for a few centimetres. Inserting the zip: Iron the slit facing on the right side on the fold and on the left side 5 mm towards the edge. Sew the zip below the lower flap. Pin the front centre of the right front part on the front centre of the left front part. Sew the loose zip tape on the facing. Topstitch the upper flap. Fold the slit facing lengthwise with the right side inwards and sew it to the lower edge. Turn the facing and finish the long edge. Pin the slit facing right side on right side below the lower flap and sew it on close to the zip tape. Fix the lower edge with pins and sew it on the zip tape. Close the crotch and the inner leg seams.
7. Sew the loops for the belt and cut them in 4 pieces, each at a length of 8 cm (allowances included). Close the wide belt loop to a ring on the long edge. Turn the piece. Sew 2 decorative belt parts each right side on right side together and turn them. Topstitch the edges. Pin the pieces on one of the waistbands. Sew the seams of the rear waistband and the remaining waistband together and topstitch them.
8. Sew the upper edges of the waistband right side on right side together. Pin all the belt loops right side on right side on the upper edge of the trousers, placing the wide one in the rear centre. Pin the outer waistband side right side on right side on the trousers. Sew the waistband including the belt loops and in doing so, also finish the edge of the lower flap. Clip the corners of the allowances, turn the outer side of the waistband inwards and topstitch it from the right. Sew the belt loops right side on right side beneath the waistband at the width of the foot. Place the loops upwards and topstitch them on the upper edge of the waistband. **Tip:** Depending on the fabric thickness, it is recommended to use the height compensating tool.
9. Sew the buttonhole and sew on the button. Sew on two other buttons on the decorative belt. Hem the trousers.