

sew

ISSUE 159 FEBRUARY 2022

PATTERN DOWNLOAD

CUT OUT & KEEP

POPPY PULLOVER

Designers: Yuko Katayama,
Kyoko Sakauchi and
Michiyo Ito

Magazine page: 18



IN YOUR PRINT MENU, UNDER SIZE OPTIONS, BE SURE TO
SELECT '**ACTUAL SIZE/100%**', INSTEAD OF 'FIT TO PAGE'

© ACEVILLE PUBLICATIONS LTD | SEWMAG.CO.UK

All projects, templates and patterns are for personal home use only and cannot be sold or used for commercial purposes.

sew
sewmag.co.uk

Adult

Reference dimensions	Bust	Waist	Hip	Body measurement	Sleeve length	Rise	Inseam	Height
S	79	61	85.5	37	51.5	25	66	154
M	83	64	90	38	53	26	68	158
L	87	67	94	39	54	26.5	70	162
LL	91	70	98.5	40	55.5	27	71.5	166


Sizing

	S	M	L	LL
Bust	94cm	99cm	104cm	108cm
Total length	59cm	60cm	62cm	64cm

How to cut the fabric


※If not specified (figure stated inside the ●),
a 1cm seam allowance should be added.

※  denotes the part for attaching the interfacing (please refer to page 60).

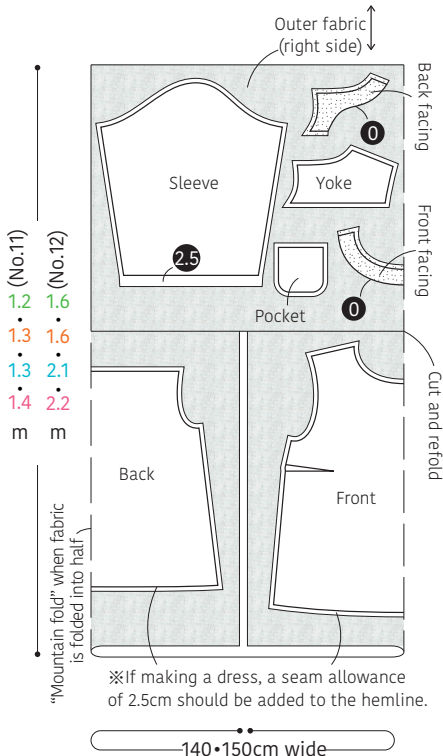

1. Pre-sewing preparation


①  denotes the part for attaching the interfacing (please refer to page 60).

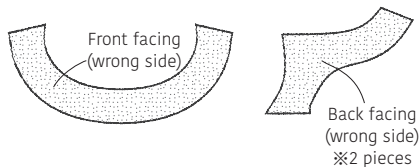

Construction Order

5. Create the facing and attach it

1. Pre-sewing preparation


No.
12No.
11

9. Finishing


※The same method
can be used to make No.11

2. Sew the darts

①Fold the center of the darts with the right side of the fabric facing out, and machine sew where the




② Turn the seam allowance down





3. Create the pocket and attach it

②Sew with the machine
(to prevent fraying, sew with a fine needle).




① Sew with overlock machine

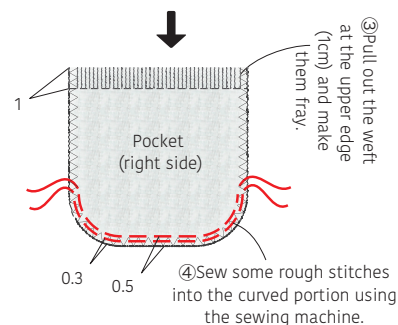


⑤While pulling the top portion of the rough stitches, fold the surrounding seam allowance

※Sew the backstitches securely to prevent the edges from coming out.



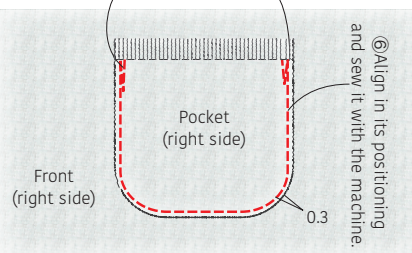


※Do the same for the other side


4. Sew the shoulder line

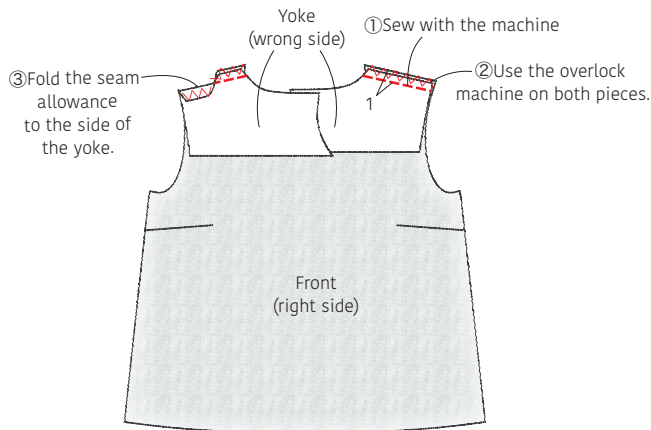


5. Create the facing and attach it

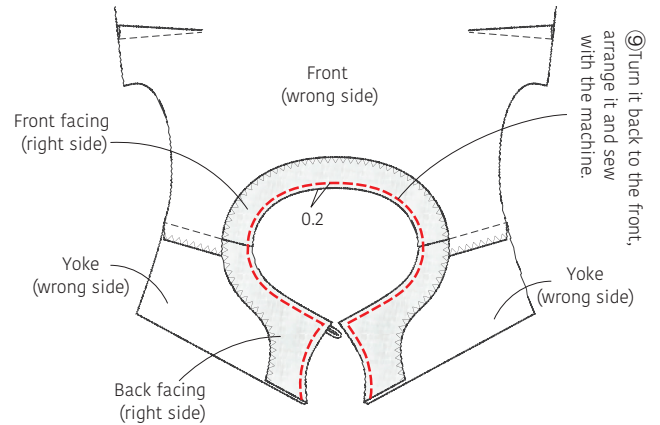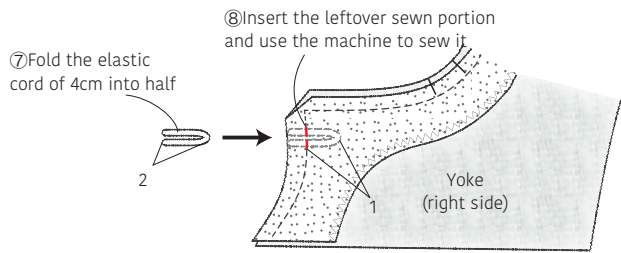
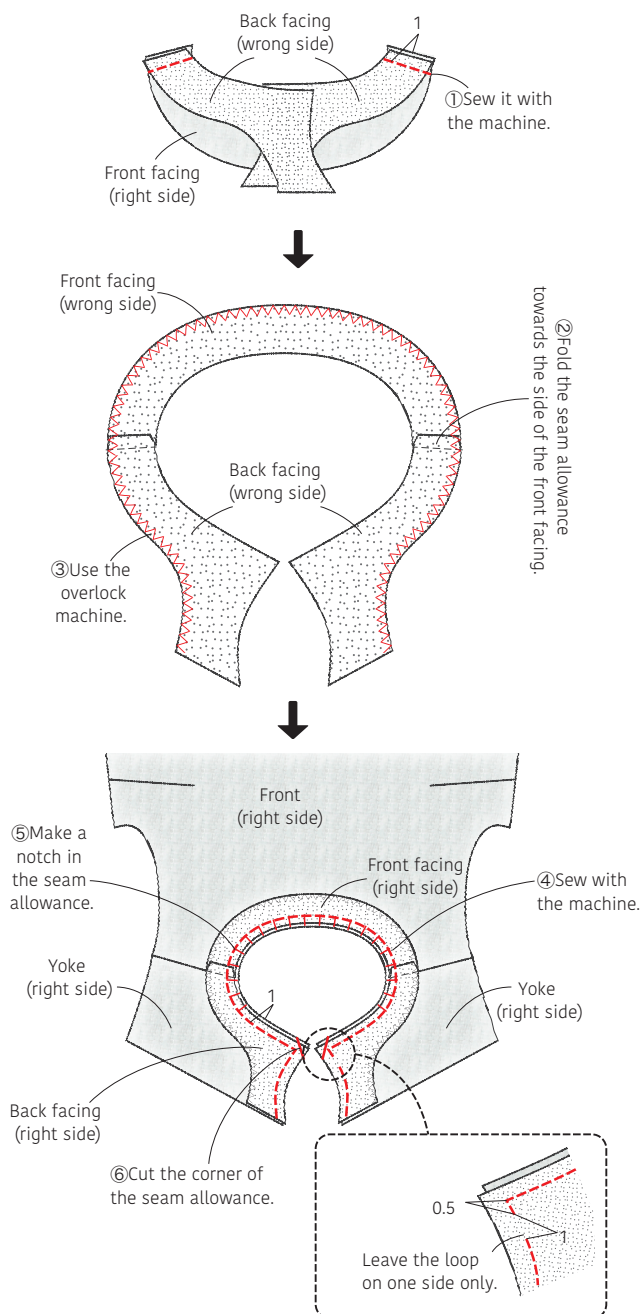


6. Sew the panel line in the back

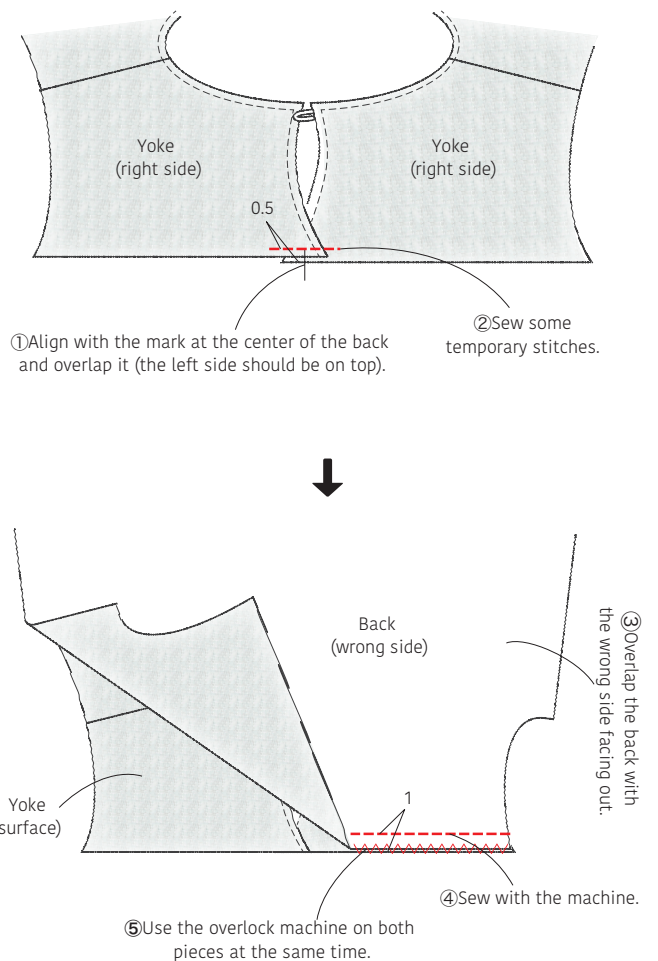


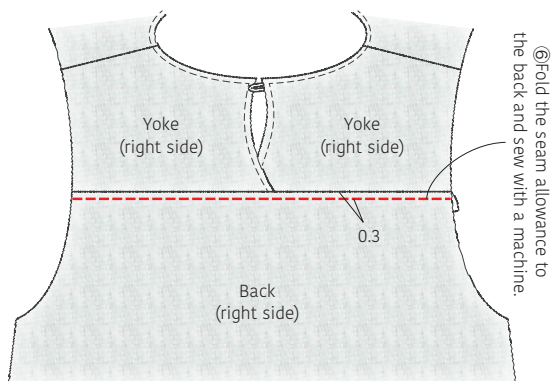

7. Attach the sleeves



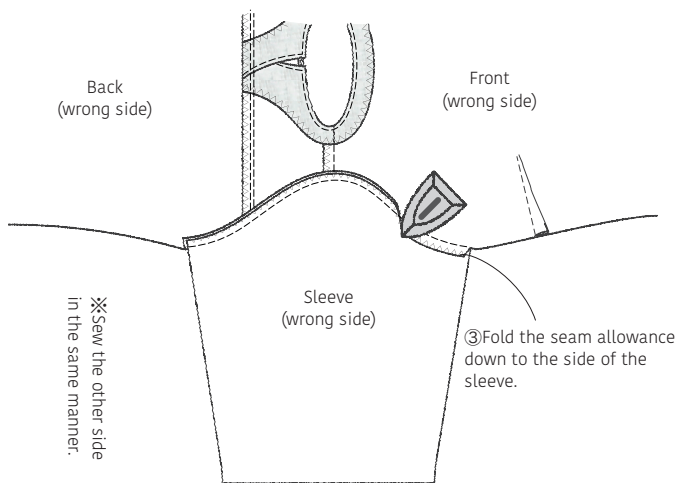
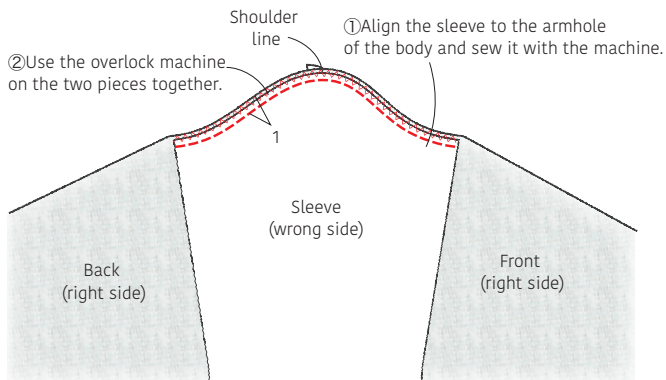


8. Sew the lower sleeve line to the side line

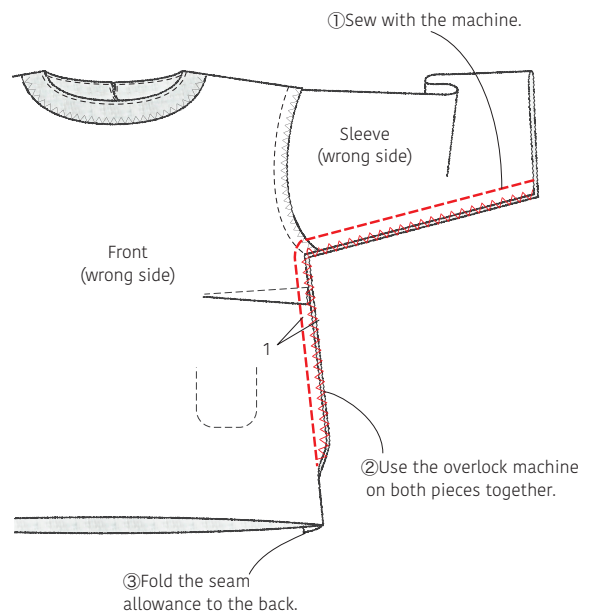


※ Sew the other side in the same manner.


9. Finishing

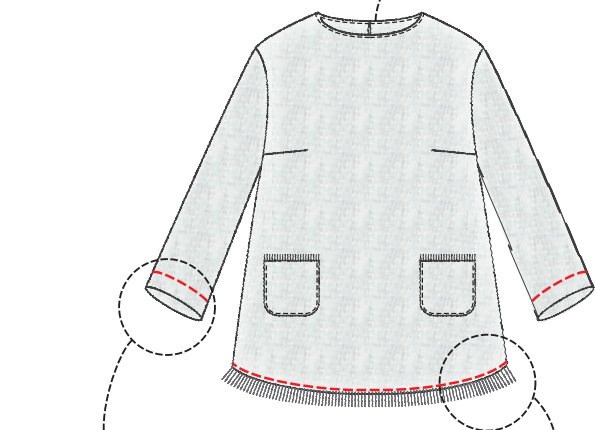

PATTERN LAYOUT

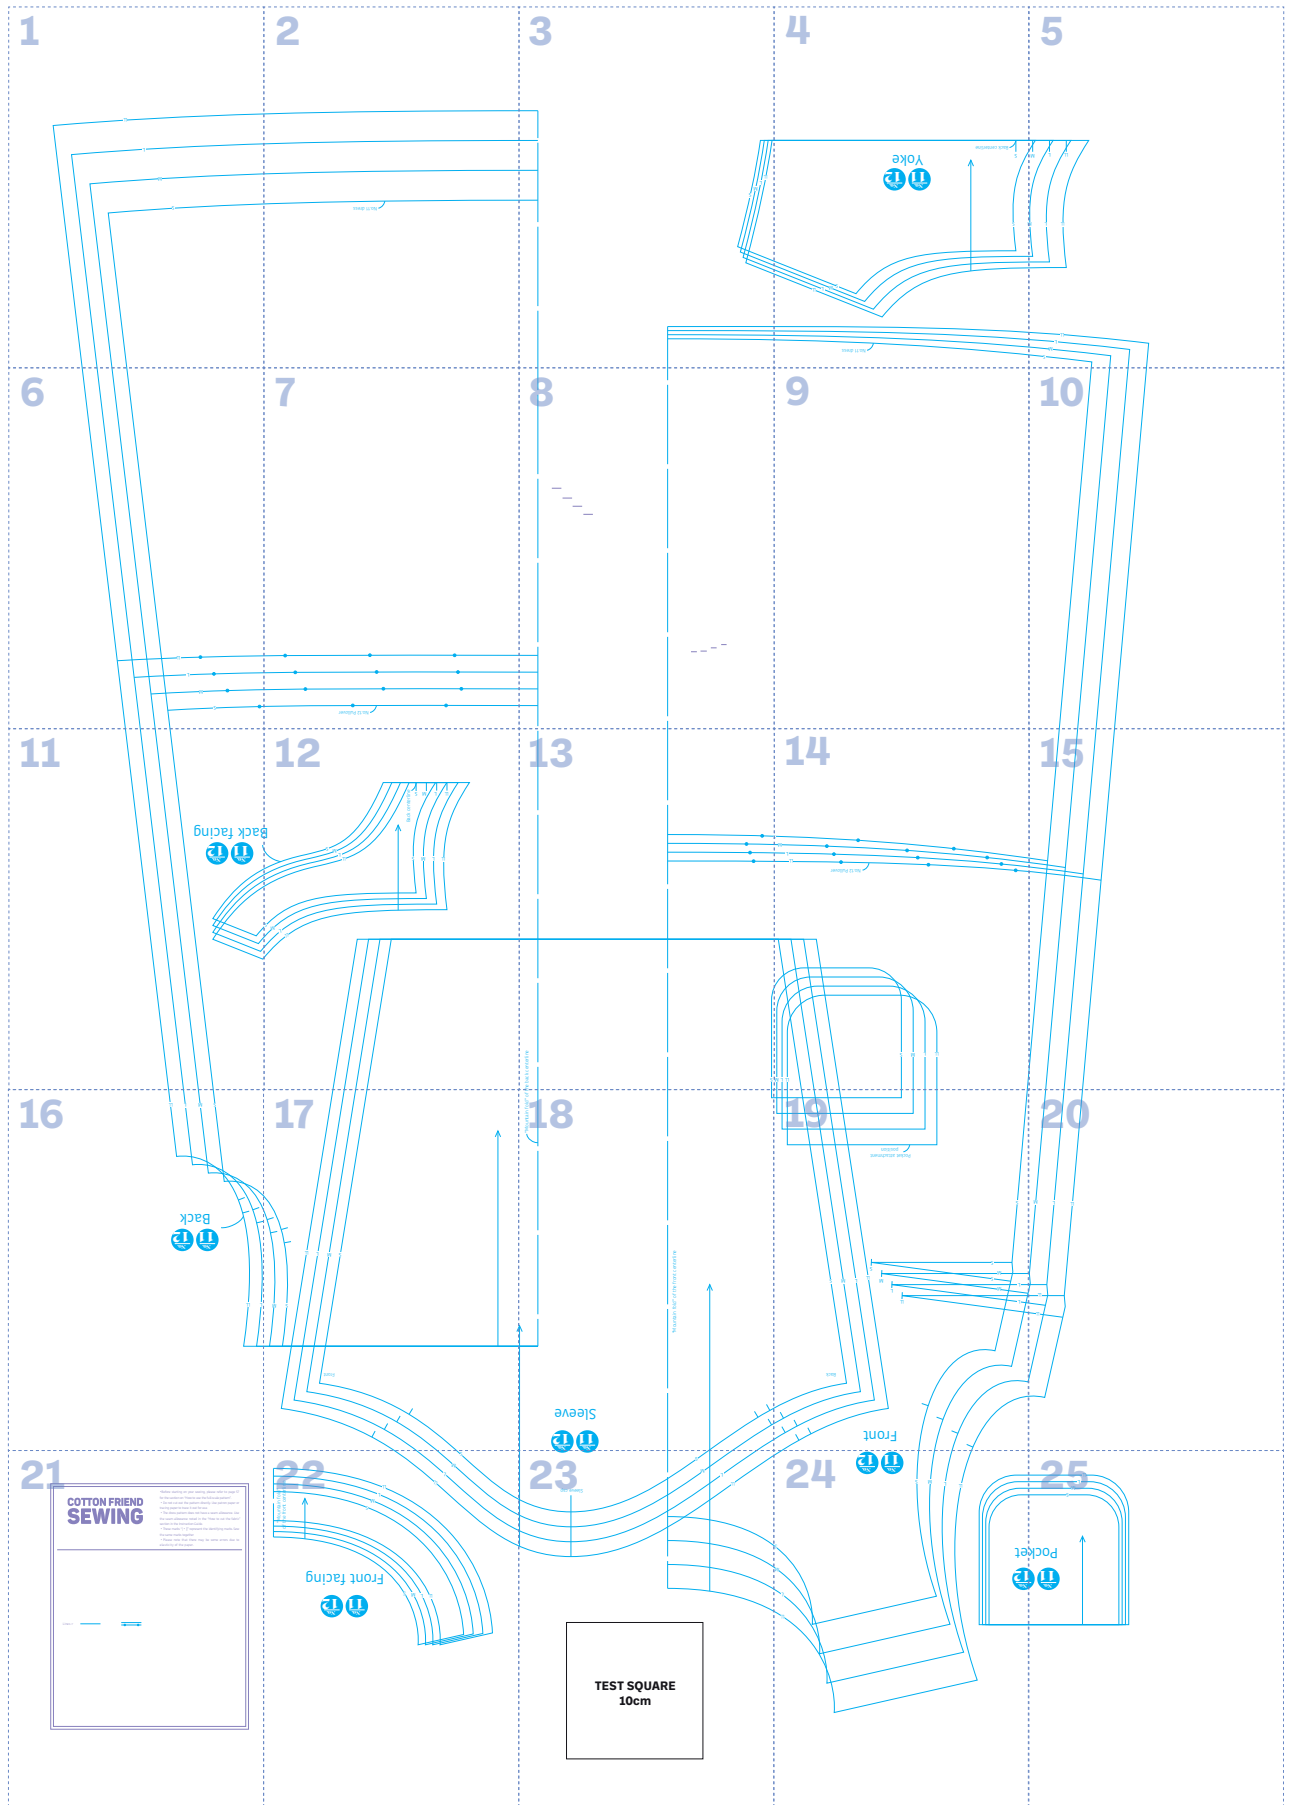



1

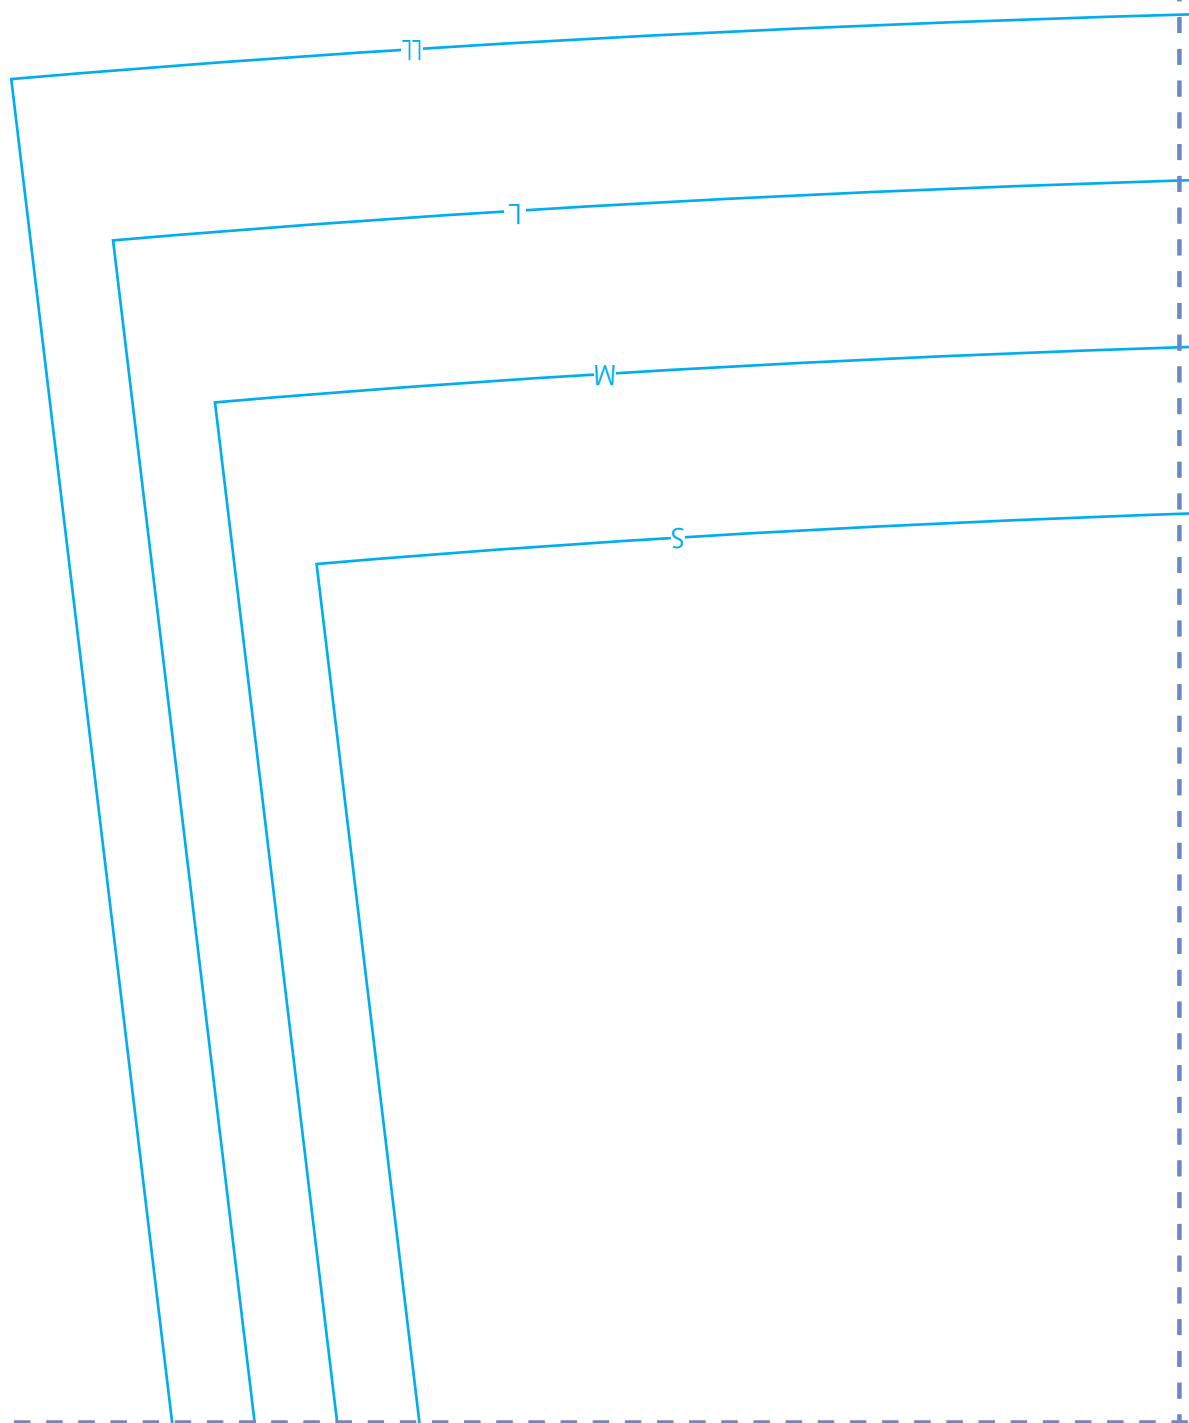

2

No.11 dress

3

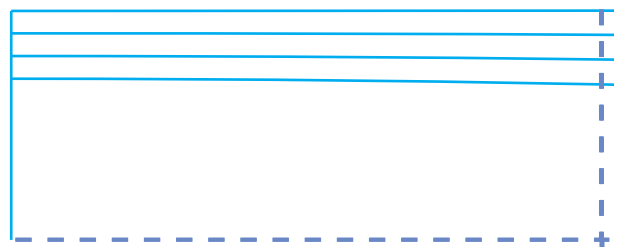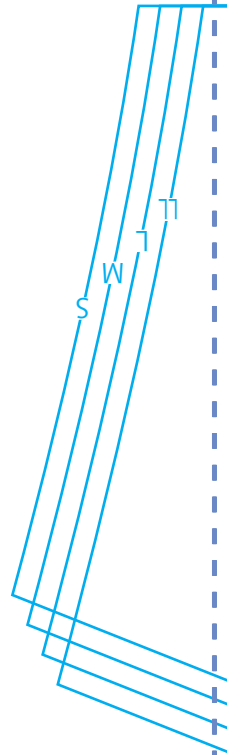



3

1


11-1-WS

No.11 dress

5

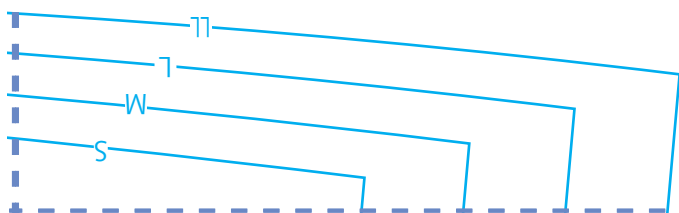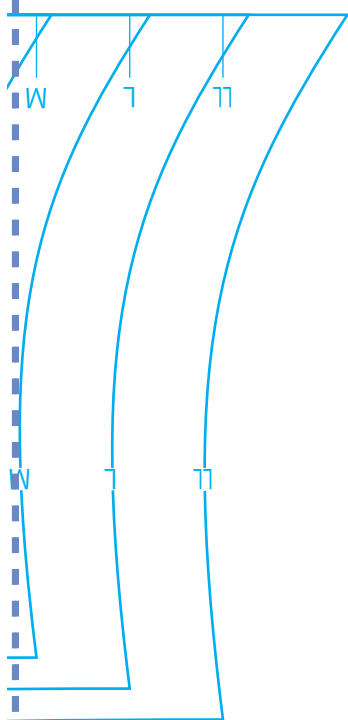


6

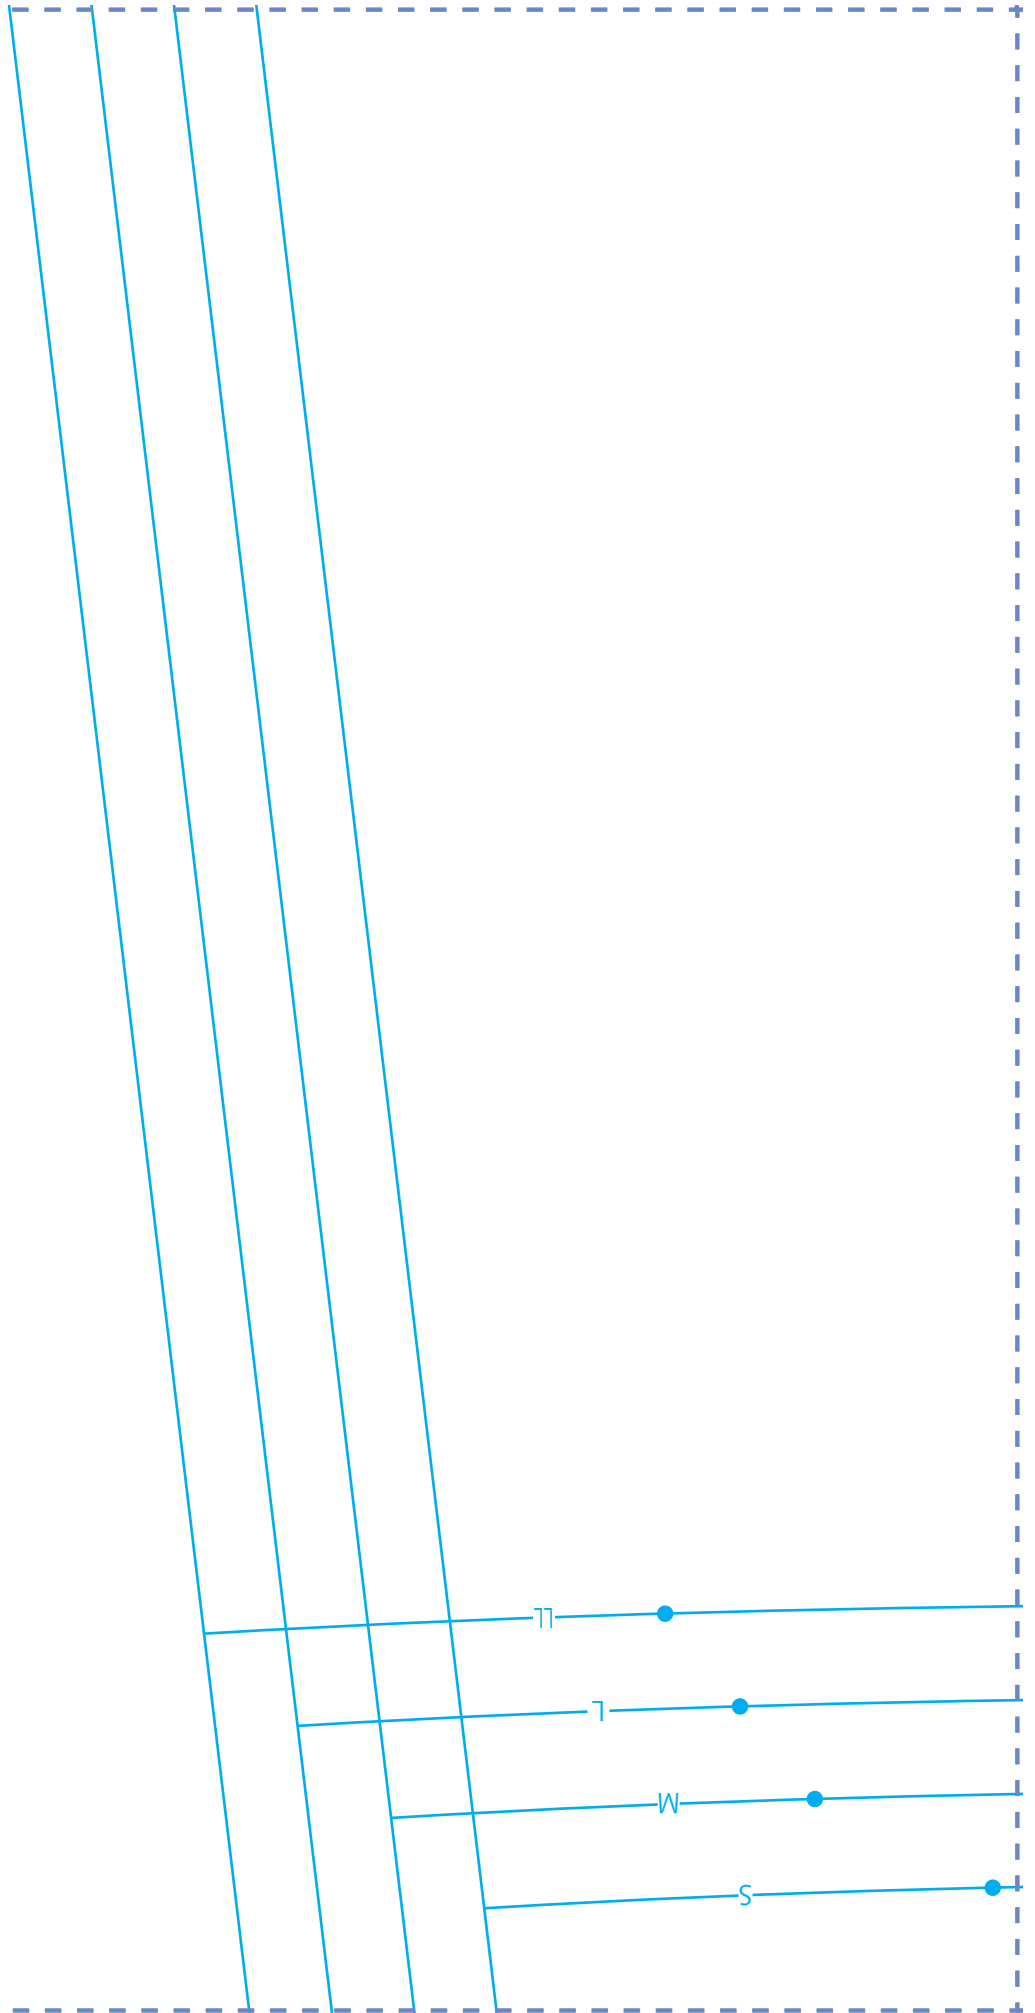

7

No.12 Pullover

8





9


10

11

Back facing

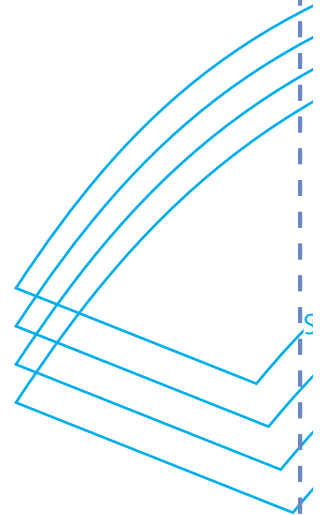

12


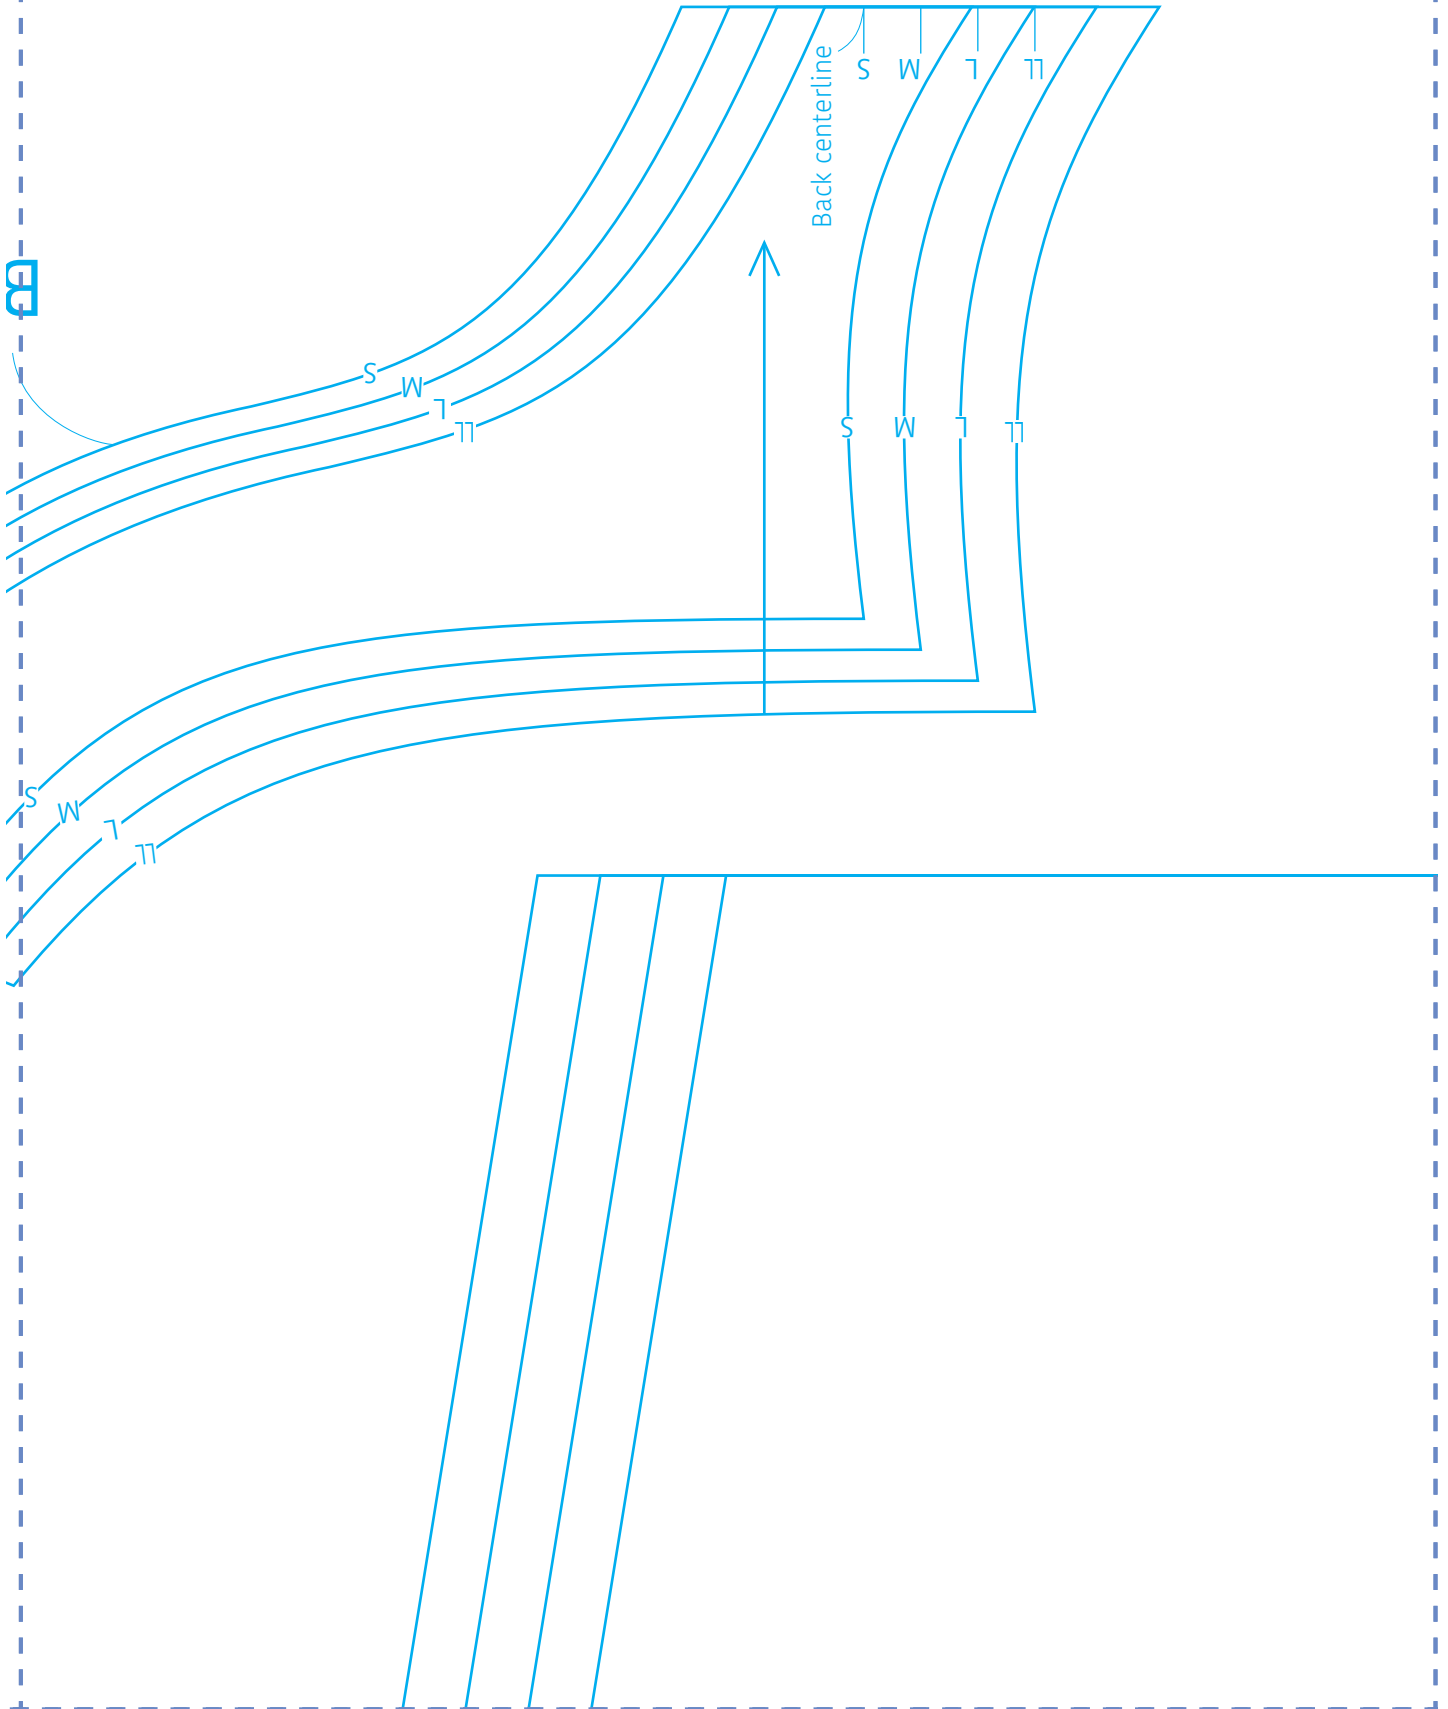


13

the back centerline


5

14

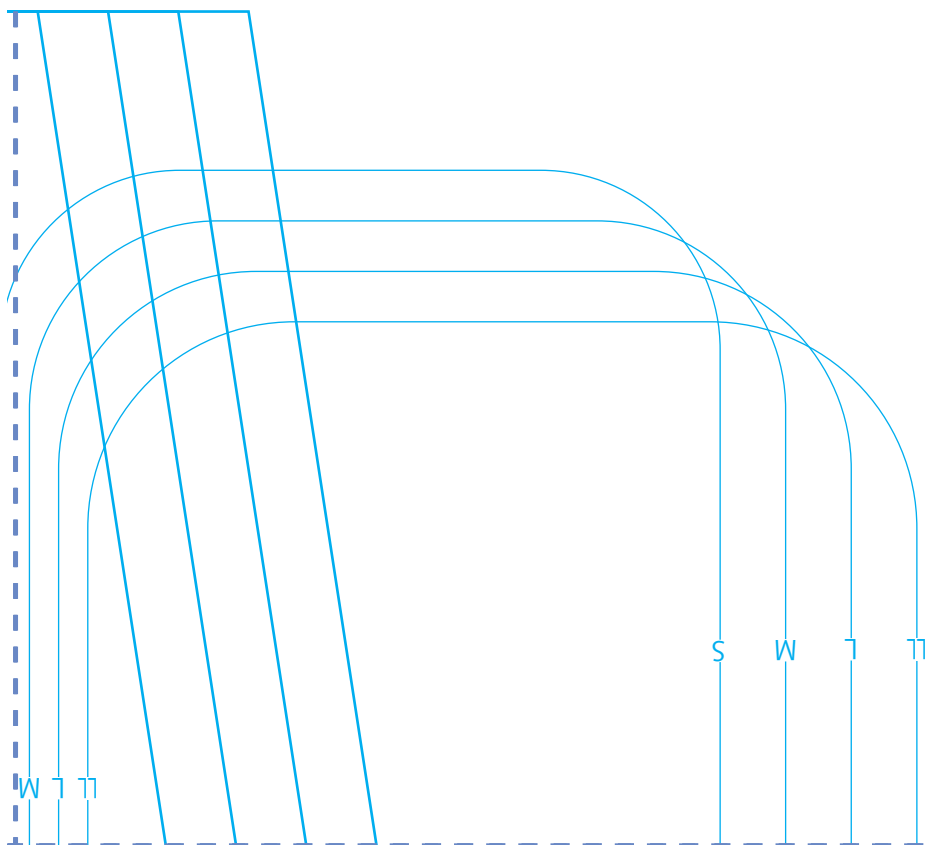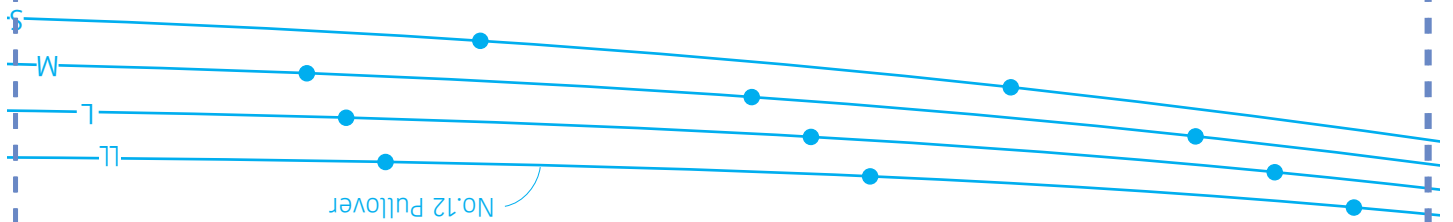

15

16

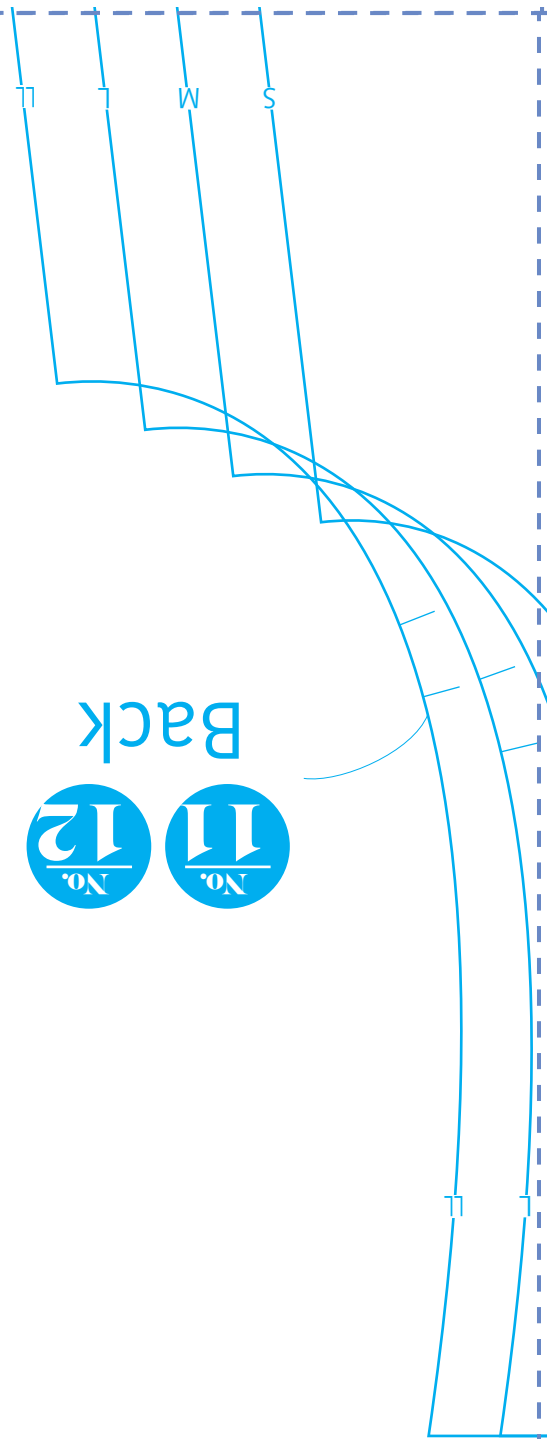


Back

No. 12

No. 11

17

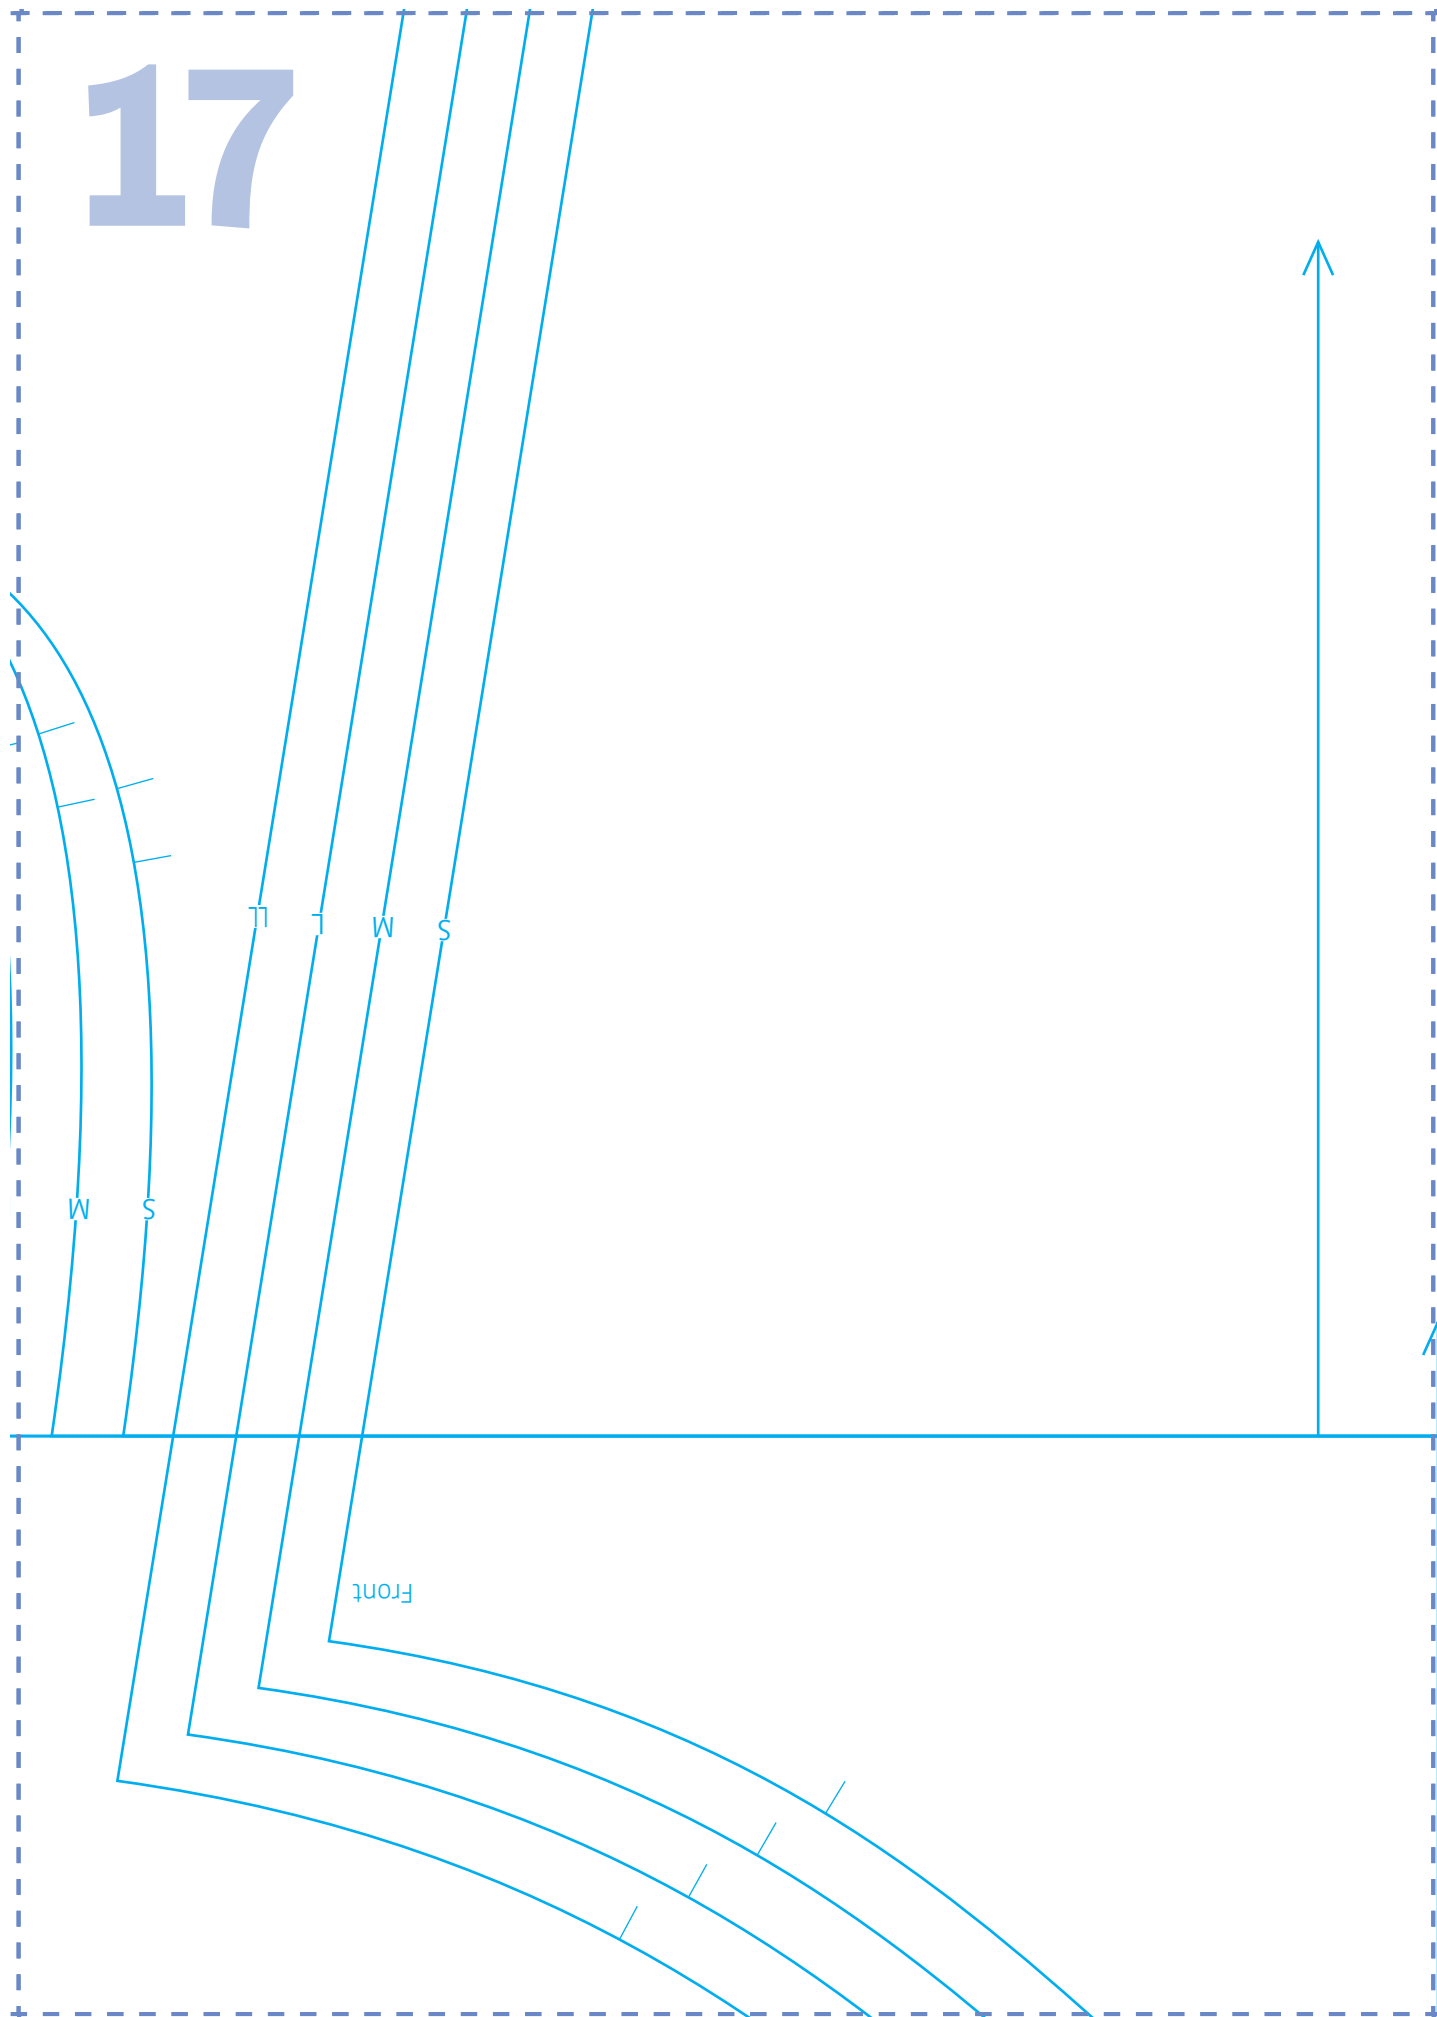

18

Sleeve



“Mountain fold” of the front centerline


19

Pocket attachment
position

Back

Front

20

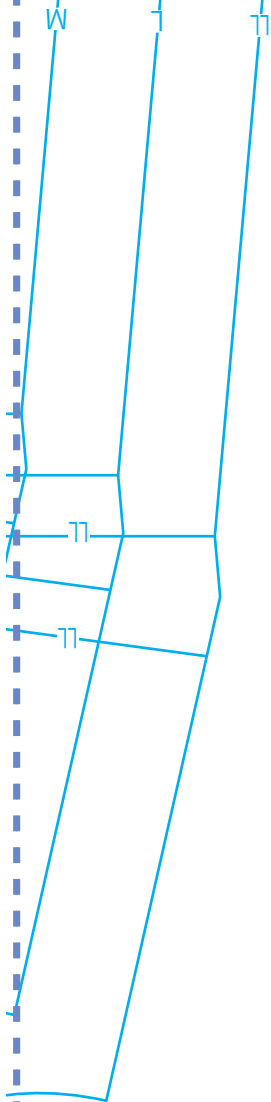

COTTON FRIEND SEWING

- Before starting on your sewing, please refer to page 57 for the section on "How to use the full-scale pattern".
- Do not cut out the pattern directly. Use patron paper or tracing paper to trace it out for use.
- The dress pattern does not have a seam allowance. Use the seam allowance noted in the "How to cut the fabric" section in the Instruction Guide.
- These marks "•" "||" represent the identifying marks. Sew the same marks together
- Please note that there may be some errors due to elasticity of the paper.

Lines >



22

"Mountain fold"
of the front centreline



Front facing



S
W
L
L

23

Sleeve cap

S

W

L

TL

TEST SQUARE
10cm

24




S

W


7

11

set

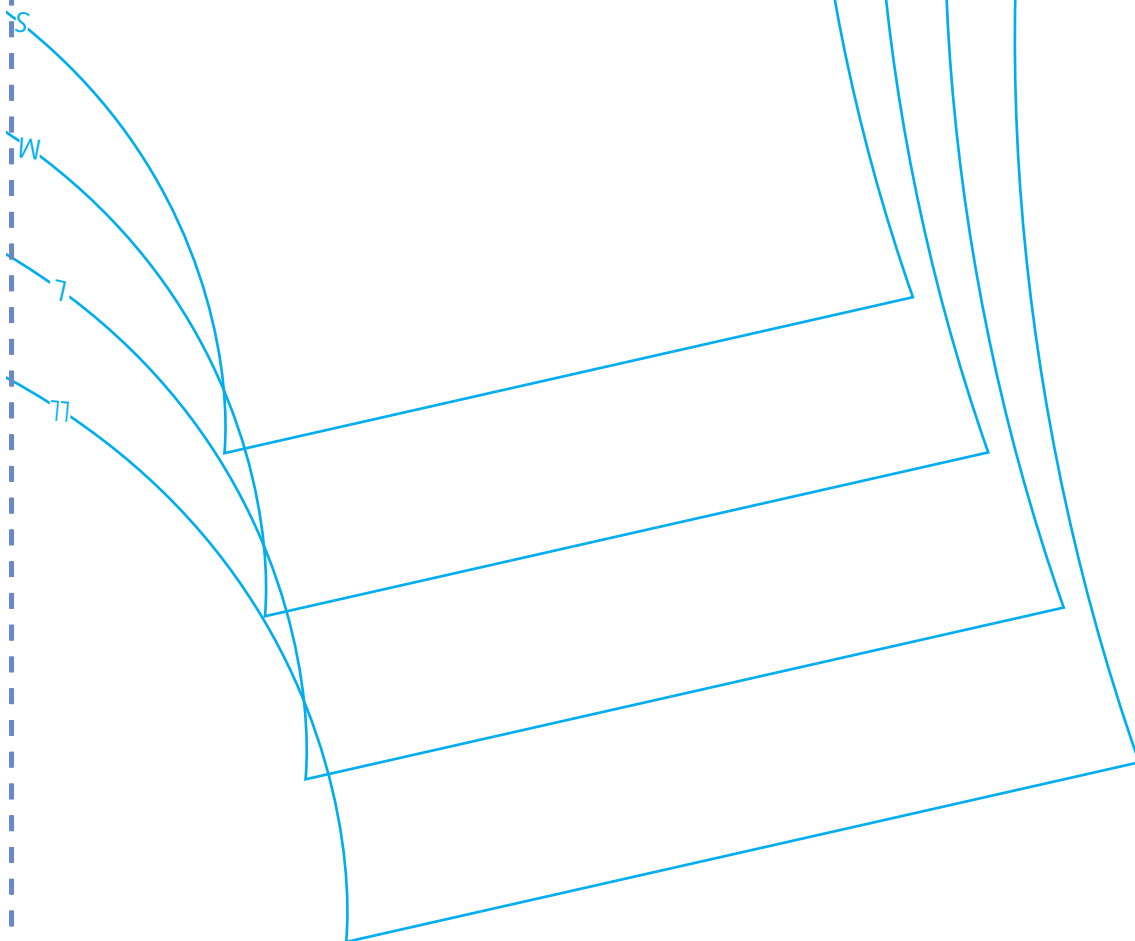

25

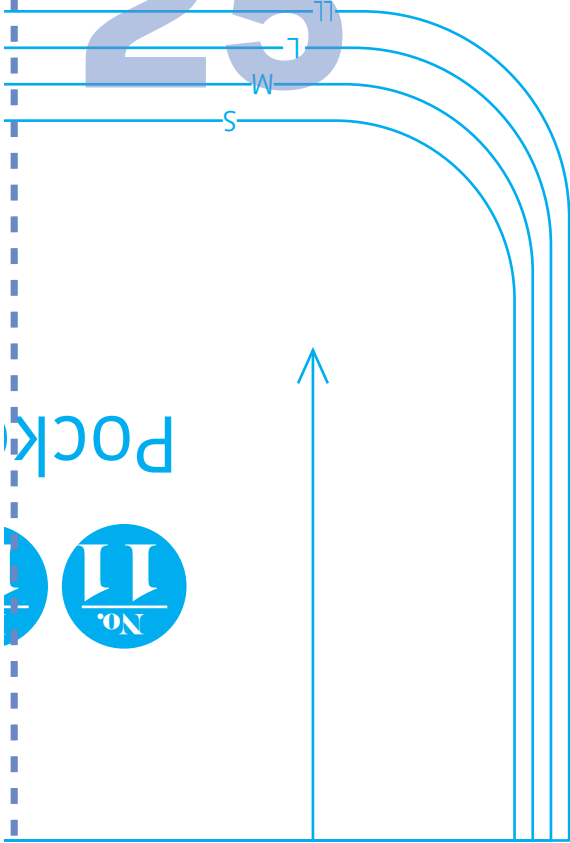

Pocket

