




ikatee

French Sewing Patterns for Kids

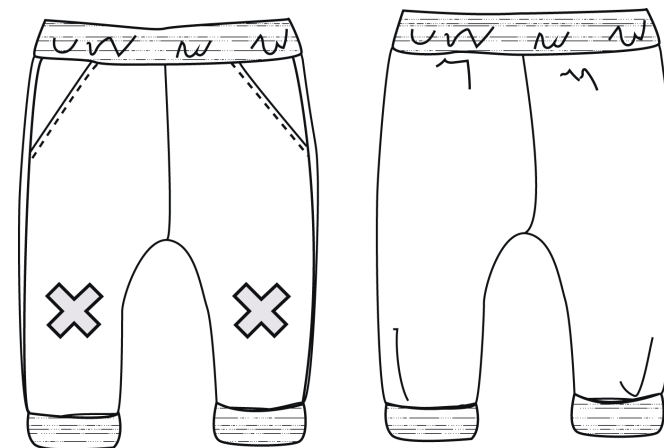

BARCELONA

Jogpants

6, 12, 18, 24 months old

Skill level : easy

ikatee.com

Product DESCRIPTION

Sewing pattern for Baby Boy

Comfort Fit

Elasticated waistband


Turn-ups at leg bottom

2 front pockets

2 appliqués at knees

Waistband is assembled with wrong side out for a fancy look.

A timeless garment easy to sew.

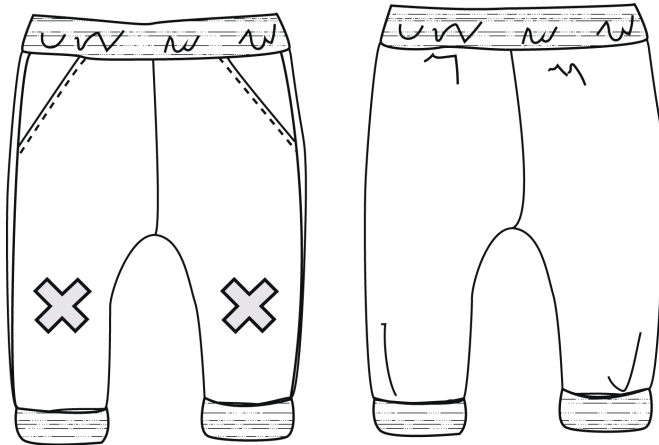

FABRIC RECOMMENDATIONS

Best to use for this garment

MAIN FABRIC

ANY SEASON

In Cotton ou Cotton/Elastan
French terry fabric or heavy jersey
Or slub heavy jersey

FOR AUTUMN WINTER SEASON

In Cotton/Polyester
Terry fabric brushed on wrong side

Solid colour or all over-printed

OTHER FABRIC

- Cotton Jersey for the knee appliqués and pocket bags.
- You might design any shape for the patches or buy any at haberdashery

I made the illustrated garment with the following supplies:

- a terry fabric from an «old» sweatshirt of the family wardrobe that I cut out

SUPPLIES


what you need for ...

FABRICS

- fabric 1 : main fabric
- fabric 2 : for knee appliqués and pocket bags

TRIMS

- Flat elastic of 1,5cm of width (3/5")
- Paper-backed fusible adhesive (like ©Vliesofix de ©Vlieseline)
- DTM / tone and tone thread

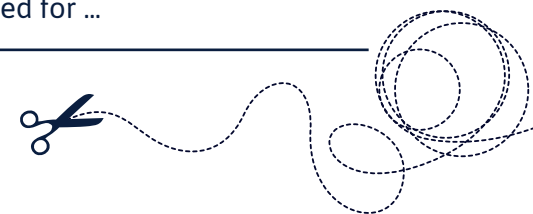

Age (months)	6	12	18	24
Height (cms)	67	74	81	86
Fabric 1 in 140cm of width	45cms	50	55	60
or fabric 1 in 110cm if width	50	55	60	65
Fabric 2 (height*width)	50*20	50*20	50*20	50*20
paper-backed fusible adhesive	10*20	10*20	10*20	10*20
Flat elastic of 1,5cm of width (3/5")	44	46	48	50

Piece of advice

Instructions before sewing...

HOW TO PICK THE RIGHT SIZE

The sewing pattern is proposed for newborns aged 6-12-18-24 months old which suits heights of 67-74-81-86 cms. First check the table of measurements to control what size is the best for her/him.

European standard measurement guideline (in cms)

Age (months old)	6	12	18	24
Height (cms)	67	74	81	86
Waist line measurement	44	47	49	50
Waist to floor	37	42,5	48	53,5

CUTTING INSTRUCTIONS FOR SPECIAL PATTERNS

for fabrics with patterns or drawings

- In case of fabrics with direction either because of a surface pattern or a nap or pile : pieces to be laid out in the same direction.
- Stripes or checks : just check and ensure the matching at sides
- Drawings with no direction (like dots or small flowers) : no specific instructions

SPECIFIC FABRIC INSTRUCTIONS

It is recommended to pre-wash the fabric before cutting.



PDF PRINTING AND ASSEMBLY

Instructions :

1. **Select the file for the age or size you want.**
2. **Select to print at scale 100%** ; I highly recommend to check that the size of print is correct and at scale by printing only the first page and checking that the scales of 3 centimeters or 1 inch on the sewing pattern have the right size.
3. **Launch print** on A4 or US Letter pages. The sewing pattern is sized to fit both sizes
4. **Put the pages together** according to the diagram that's on first page (following the order A,B, C etc) and match the black triangles together to form squares. The print margins around the pages are to be cut or bent, removed.
5. **Use tape to stick the pages together** especially inside cut pieces.
6. **Cut around the shapes** and respect cutting lines. You only see cutting lines, seam allowances are included.
7. **Check with the diagram** underneath that you have all pieces, markings and notes.

12 pages to be printed

1st page of the sewing pattern

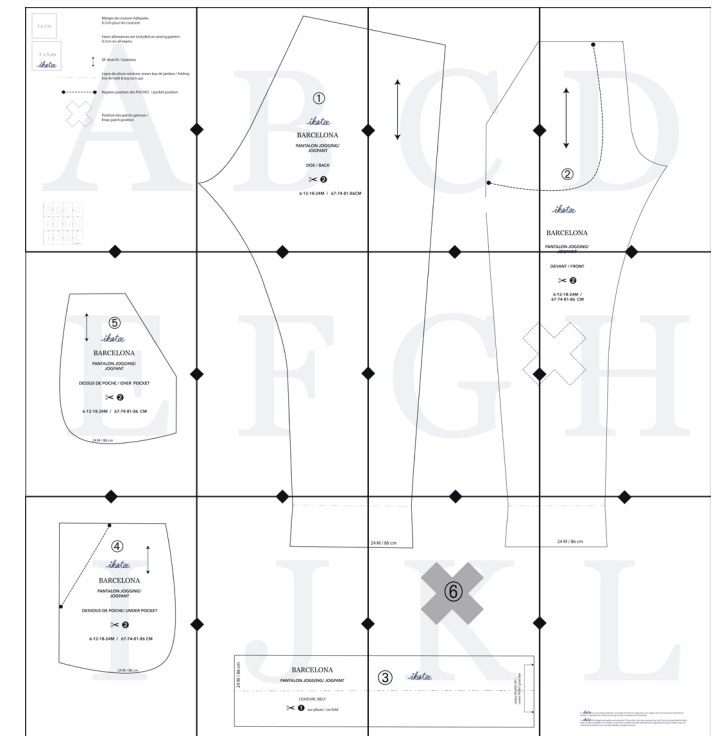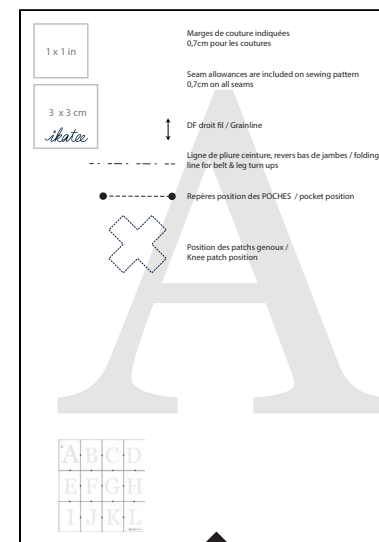

CUTTING

Seam allowances are included in the sewing pattern


SEWING PATTERN PIECES:

- ① BACK : ☞ 2 x (1 wrong, 1 right side of fabric 1)
- ② FRONT : ☞ 2 x (1 wrong, 1 right side of fabric 1)
- ③ WAISTBAND : ☞ 1 on fold of fabric 1
- ④ UNDERPOCKET : ☞ 2 x (1 wrong, 1 right side of fabric 1)
- ⑤ POCKET BAG : ☞ 2 x (1 wrong, 1 right side of fabric 2)
- ⑥ KNEE appliqués ☞ 2 in fabric 2

CUTTING LAYOUT INSTRUCTIONS:

- The following fabric layouts are for fabric width from 110 to 140 cm
- The fabric 1 is folded in 2 as shown above (right sides together)
- The fabric 2 is folded in 2 (right sides together) or flat laid out.
- If pattern with direction, align the front and back pieces to ensure the matching
- The border lines are the cutting lines, including the seam allowances of 0,7cm (=1/4") except for specific information (no seam allowance for the knee patches)
- The sewing lines are not visible on the sewing pattern. You might draw them using tailor's chalk or temporary pens.

in 140 cm of width

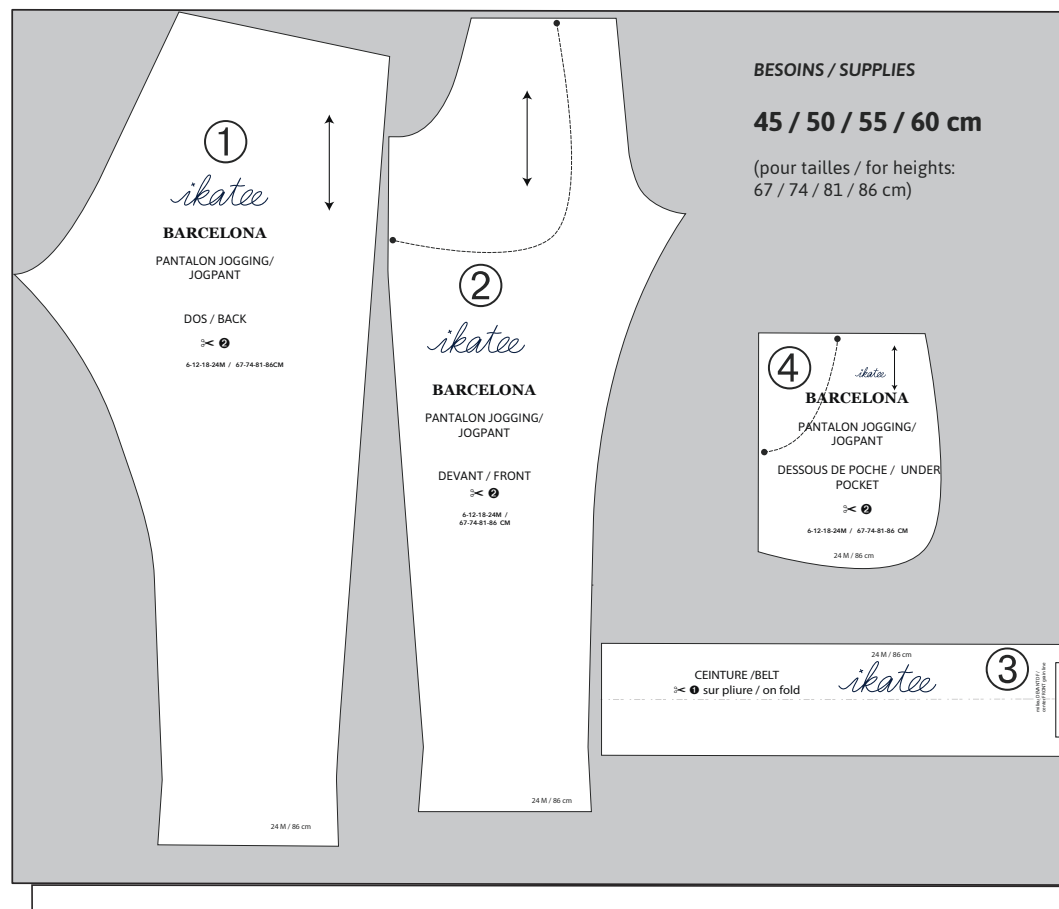

140 cm plié en 2 / 140 cm folded in 2

□ Pièces du patron / pattern pieces
■ Envers tissu / wrong side




PIÈCES 5 ET 6 À COUPER 2 FOIS DANS TISSU 2 /
PIECES NB 5 AND 6 TO BE CUT IN FABRIC 2 (contrasted
colour jersey)

CUTTING

Seam allowances are included on sewing pattern

in 110 cm of width

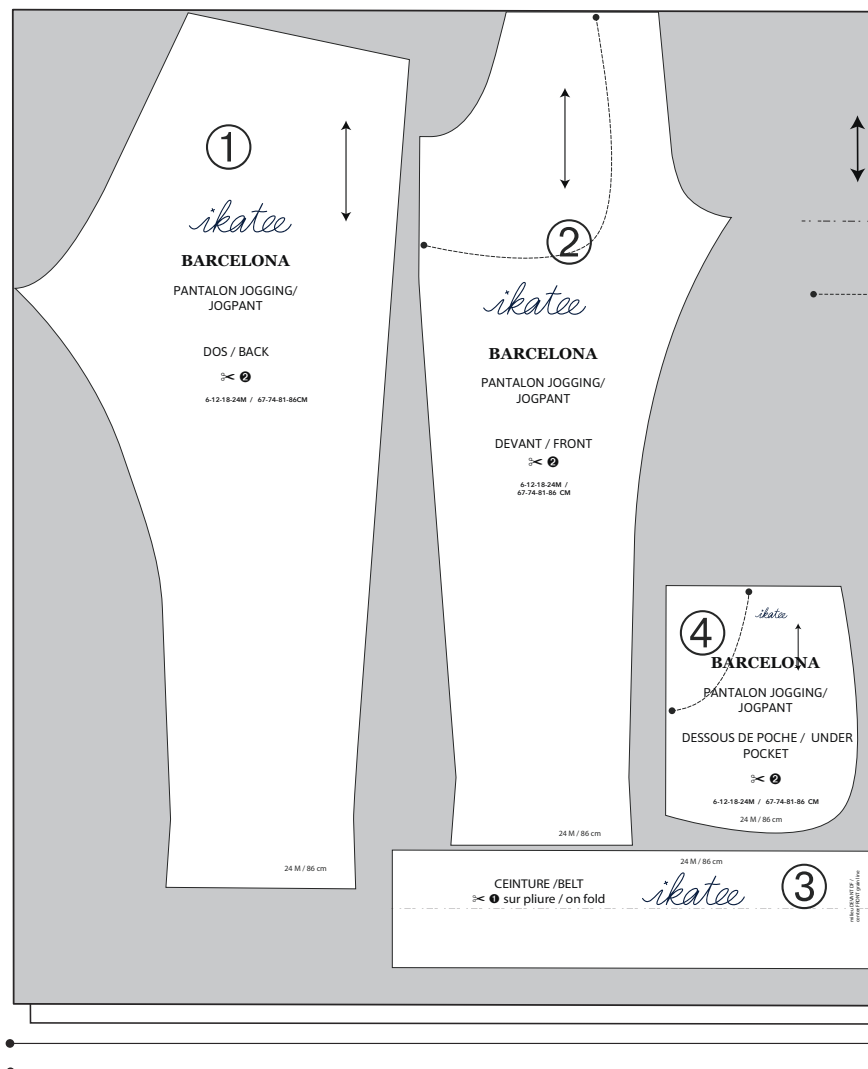

-Marges de couture indiquées
0,7cm pour les coutures
-Seam allowances are added
on sewing pattern
0,7cm on all seams

DF droit fil / Grainline

Ligne de pliure ceinture,
revers bas de jambes / folding
line for belt & leg turn ups

Repères position des POCHES
/ pocket position


BESOINS / SUPPLIES

50 / 55 / 60 / 65 cm

(pour tailles / for heights:
67 / 74 / 81 / 86 cm)

si pièce n°3 dans la matière
principale, sinon prendre 5cm
de moins

if nb3 piece in shell fabric,
otherwise, use 5cm less fabric



110 cm de large plié en 2 / 110 cm width folded in 2

□ Pièces du patron / pattern pieces

■ Envers tissu / wrong side

PIÈCES 5 ET 6 À COUPER 2 FOIS DANS TISSU 2 /
PIECES NB 5 AND 6 TO BE CUT IN FABRIC 2 (contrasted
colour jersey)

KEY POINTS

and some tips...

Draw the sewing lines :

- The sewing lines are not on the sewing patterns. You might draw them if you need for, knowing the seam allowances are 1/4" or 0,7cm except for specific indications.

Transfer the notches, markings and notes:

- Draw carefully the notches, markings (folding lines, any specific position, pockets, patches ...) and notes (piece's numbers)

After cutting check:

- Before sewing, place the pieces to build up the garment approximatively. Check that nothing is missing.

...and while sewing:

- Regularly check your work. If needed, do not hesitate to un-pick and restart to improve.
- While finishing any step, clean out the work as well as the seam allowances to be reduced to 4mm as a minimum.

Seam finishes:

- After sewing any seam, neaten the raw edges to prevent them from fraying.
- You can even neaten the two layers together at the same time. Use either a zig zag stitch, a overcasting stitch or even a overlocker.
- Overlockers/sergers allow home sewers to benefit from a manufacturer seam finish. Overlocking forms stitched over a newly trimmed edge to get a neat finish. Use 3 threads except for heavy fabrics (then use 4 threads) ; it is possible to overlock raw edges together and neaten them at the same time.

SUMMARY OF INSTRUCTIONS

Key steps

A. LAYOUT THE PATTERN PIECES, CUT OUT, CHECK

B. KNEE APPLIQUÉS

C. ASSEMBLY POCKETS

D. ASSEMBLY LEGS

E. ASSEMBLY WAISTBAND

F. FINISHES : TURN-UPS



STEP-BY-STEP INSTRUCTIONS

Pictures, illustrations and tips...

A. LAYOUT THE PATTERN PIECES, CUT OUT, CHECK



- 1 Lay out the pattern pieces on fabric, following the direction mentionned on pattern. Cut out. Check that no piece is missing ..

B. KNEE APPLIQUÉS




- 2 with wrong sides together, place a rectangle of 20*15cm of fabric 2 (jersey) and a rectangle of paper-backed fusible adhesive.



- 3 Press with iron to heat and glue



- 4 View of the right side of the jersey textile.

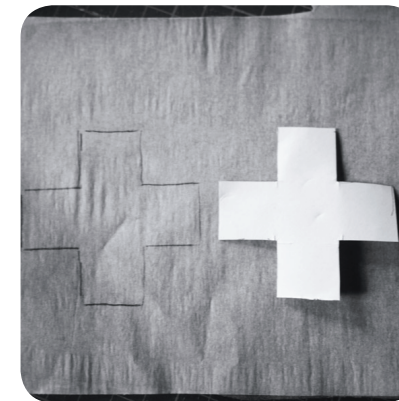

- 5 Place the template of the patches over the paper adhesive and draw the shape outline. Repeat to double or even triple the shape (the third appliqué will help you to train on a left over fabric piece). Cut out the shape required




6 Cut out carefully the 2 knee appliqués.



7 Peel off the backing and place the appliqué shape onto the main fabric.




8 Place the patches wrong side over the front leg (N°2pieces) right side following the marks on the sewing pattern. Check symmetry.

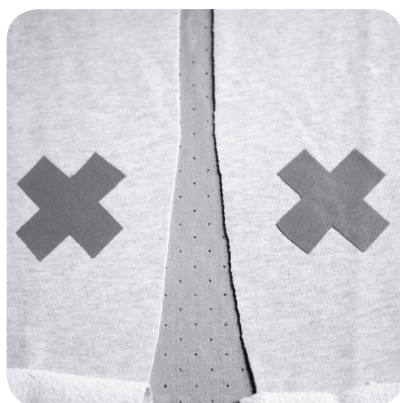


9 Fuse with the heat of the iron.

satin
or zigzag
stitch

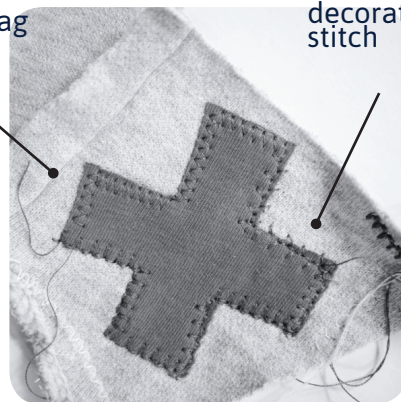

10 It is recommended to train to patch on a extra fabric piece. You can choose either a blanket or a satin stitch by adjusting the zigzag length and width to give a solid line.

or blanket
decorative
stitch

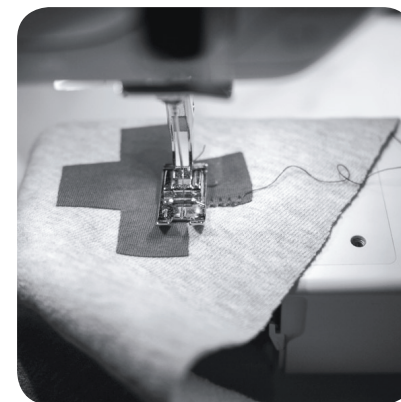

11 As soon as you are comfortable with one or other stitch, sew carefully outer the edge of the appliqué shape.



12 Follow the shape carefully.




13 The outline will hold the shape in place and enhance the design. Do not hesitate to undo and re-sew if required to improve.

C. ASSEMBLY POCKETS



14 With right sides together, place the N°5 pieces on front legs (N°2 pieces), according to the marks on pattern.

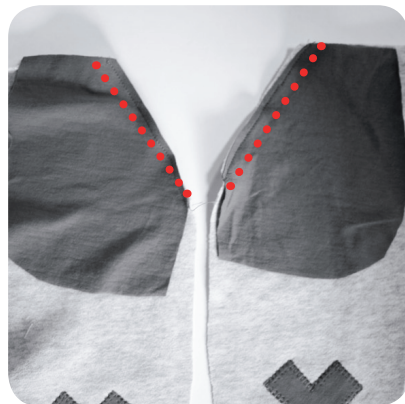

15 Straight stitch using 1/4" seam allowance at pocket opening only. Overcast or overlock the raw edges together.



16 Turn inside out the pocket bag, press the pocket opening and repeat on other pocket. Overstitch the line at edge.



17 View on the wrong side, and view on the right side .



18 With right sides together, place the under pocket (N°4 pieces) on pocket bag. Pin around.



19 Straight stitch around using 1/4" seam allowance and overcast or overlock the raw edge. Repeat on other pocket.



20 View of the right side.



21 Hold the side and top of the pocket with pins or clips.

D. ASSEMBLY LEGS




22 With right sides together, pin the side seams of the front and back legs.



23 Straight stitch using 1/4" seam allowance. Overcast or overlock raw edges together. Repeat at other side seam.




24 Pin the inner leg seams together (front and back together). Repeat on other leg.

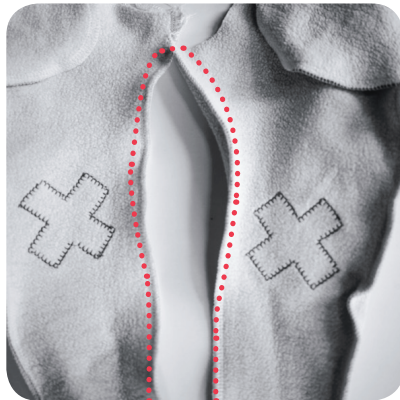

25 Straight stitch using 1/4" seam allowance. Overcast or overlock the raw edges together.



26 Turn one leg inside out and insert it into the other leg. With right sides together pin the front crotches together, then repeat on back crotches. Straight stitch the front crotch, and then the back crotch in one stitch (from front to back); Overcast or overlock the raw edges together.

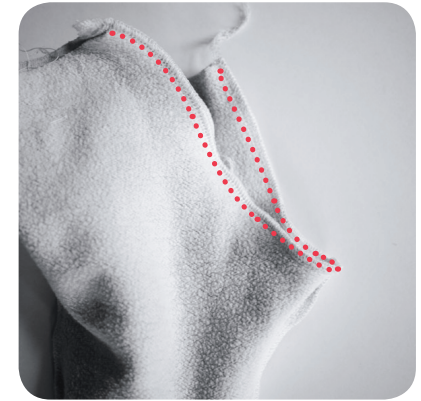

27 View of the front.



E. ASSEMBLY WAISTBAND



28 Place the wrong side of the waistband along the right side pants top edge. Pin.



29 The 2 ends should meet at back center.



30 Adjust and cut out the extra fabric at waistband (The waistband is a little too long at origin to enable you to adjust it to the pant top edge (the knitted textile fabric might have been extended during the assembly))



31 Straight stitch the waistband ends together and overcast or overlock the raw edges. The waistband is secured.



32 Finish to pin it around the pants top edge. Straight stitch the waistband and top edge using 1/4" seam allowance and overcast or overlock the raw edges together.



33 Turn the waistband inside out. (the wrong side is visible as a decorative required look)



34 Fold using 1/4" seam allowance, press to mark.



35 Fold again the waistband in 2 and pin it to create a casing.



36 Mark and press the waistband to hold it.



37 Straight stitch on right side at bottom waistband edge. Use a pointy tool to press the fabric in case of overlayers; this would help you.



38 Let around 2" open (no stitching) to insert the elastic into channel.



39 Cut a flat elastic (3/5" of width) to the convenient length (refer to the chart on page 3) or adjust it to the baby's waist measurement + 4cms (2 cms at each end for seam allowances). Pin one end to a safety pin. Insert the safety pin and elastic into the channel. Join the 2 ends.



40 Overlap the ends over 2 cms and secure with lockstitches the elastic.



41 Finish to insert the rest of the elastic and close the waistband.



42 Sewing tips : Stitch through layers in the side seams to stabilize the elastic ; this will help the gathers to be distributed regularly and prevent the elastic from twisting in the casing.

F. FINISHES : TURN-UPS



43 Fold the leg bottom over 2/5" and fold again over 1,4" (3,5cm) to make the turn-ups.



44 Stitch through layers in the side seams to hold the turn-ups.

45 Congrats. Your BARCELONA jogants is finished!



French Sewing Patterns for Kids

© *ikatee* est une marque déposée. Ce produit est limité à l'usage privé. Son usage à titre commercial ou industriel est interdit. La reproduction, vente ou échange, totale ou partielle en est interdite.

© *ikatee* All texts, designs and patterns are protected. This product is for your personal use only. You are not permitted to share, resell or give this pdf file or its content, in any form to anyone else. No material may be reproduced in part or whole. Any commercial and industrial use is strictly prohibited. All rights reserved.