

Yellow shirt with one-side waterfall neck

Sizes S - XL



Design by Mathias Ackermann

Materials

- For sizes S and M: 1.20 m Jersey, 150 cm wide (1 1/3yd, 60" wide) (Fabric fold as usual)
- For sizes L und XL: 1.80 m Jersey, 150 cm wide (2yd, 60" wide) (body fabric fold cut perpendicular to selvage edge/grainline)
- Overlockthread
- bernette Overlock-Combomachine or bernette Overlock machine and bernette Coverstitch machine

Tips

Wash all fabrics before cutting out, as fabrics can shrink.

Transfer all the markings from the pattern onto the fabric from the pattern onto the fabric, including the mark indicating where the neckline/side seam begins.

Seam allowances



Seam allowances are not included in pattern pieces, add desired seam allowance or use the numbers in circles (cm) on the pattern.

Cutting

1 x Front/back piece on the fold

1 x Waist band 80/87/94/101 x 22 cm, finished width 11 cm (31.5/34/37/40in x 10in), or higher if desired.

2 x Sleeve cuffs 28/30/32/34 x 22 cm, finished width 11 cm, (11/12/13/13.5in x 10in), or higher if desired.

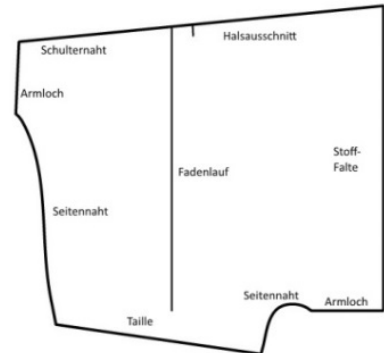


Seams: 4-thread overlock, default settings

Hem: 3-thread coverstitch narrow, stitch length extend to 3 – 3,5

Instructions

Cut shirt, waistband and cuffs, transfer all marks of the pattern to the fabric..

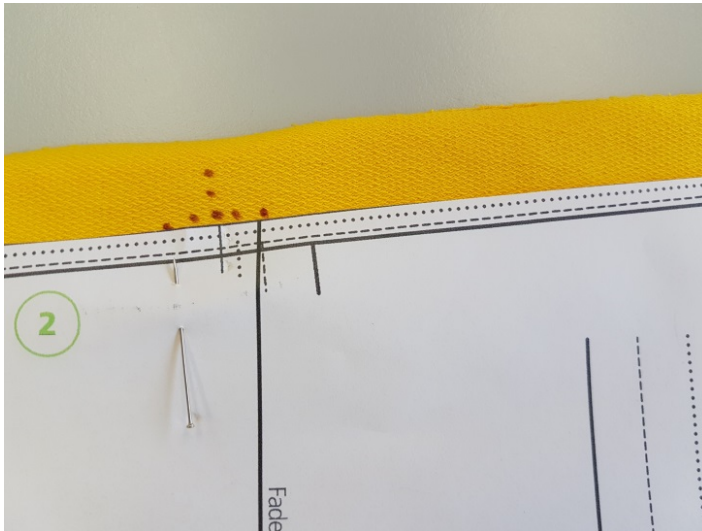

Fold neckline hem under 2 cm (3/4in), starting/stopping at the mark indicating the neckline and press. Use pins (wonderclips) to hold the hem in place.



Finish the neckline with a 3-thread coverstitch.



Trim excess fabric with appliqué scissors, if necessary, press.



Pin shoulder seam, right sides together.

Tip: use pins with a colorful head and remove them before they reach the knife to avoid accidentally sewing through the pin with the overlocker.



Sew shoulder seam with 4-thread overlock starting at the neckline.



Iron the shoulder seam against the front side.



Right sides together, pin long and short side seam.



Sew both side seams together with 4-thread overlock.



Divide the waist and sleeves into quarters and mark.



Right sides together, fold cuffs and waistband matching short sides, pin (or use wonderclips).



Using a 4-thread overlock stitch, sew the short sides together.

Tip: Try cuffs and adjust width if desired.



Press seam to one side.



Fold the waistband and cuffs, wrong sides together, along the long open side. Press and pin (or clip) together.



On waistband and cuffs mark quarters.



Attach waistband and sleeve cuffs onto shirt, right onto right side. Stretch cuffs if required due to personal width adjustments.



Sew waistband and cuffs onto the shirt with 4-thread overlock, making sure to remove all pins before they reach the knife.



Secure all remaining thread chains with a wool needle.



Finished!

