


Dressy Talk

PATTERNS



experienced
BEGINNER

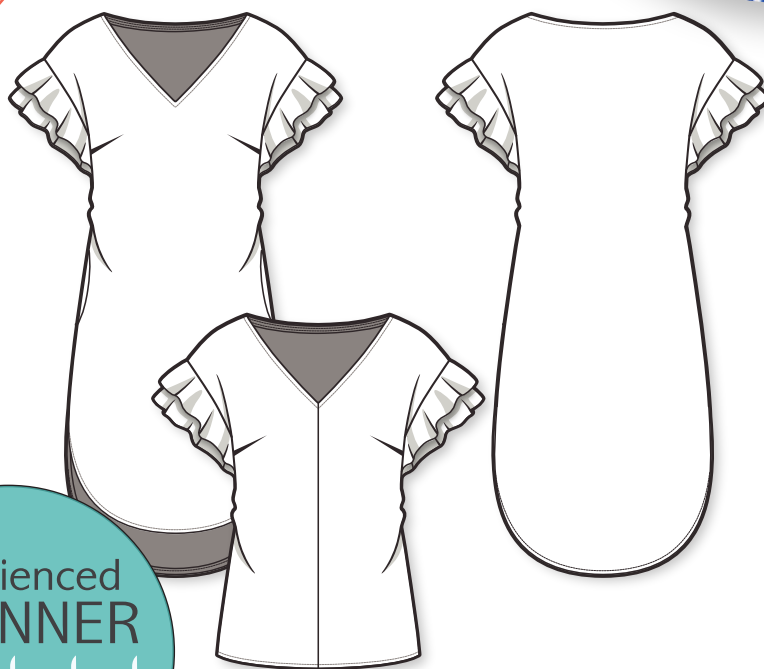

42-58

Kimono sleeve
dress/top with
layered sleeve flounces
and V-shape neckline

Dress/Top

Design #4106

Printable Sewing Pattern + Tutorial

shop.dressytalk.com



recommended MATERIALS:

Basic fabric - medium or light weight woven cotton or similar material from 140 cm (55") width:

- Dress – 1,9 m (2.1 yds) length
- Top – 1,5 m (1.6 yds) length

garment PIECES:

- 1) Front – 2
- 2) Back – 1
- 3) Upper flounce - 2
- 4) Under flounce - 2
- 5) Side gore - 2
- 6) Pocket lining - 4

size CHART:

Height	164 cm (fits up to 168 cm / 5ft 6in)								
Size	42	44	46	48	50	52	54	56	58
Bust	cm	84	88	92	96	100	104	108	112
	in	33,1	34,7	36,2	37,8	39,4	41	42,5	44,1
Waist	cm	62	66	70	74	78	82	86	90
	in	24,4	26	27,6	29,1	30,7	32,3	33,9	35,4
Hip	cm	92	96	100	104	108	112	116	120
	in	36,2	37,8	39,4	41	42,5	44,1	45,7	47,2

Height	170 cm (fits above 168 cm / 5ft 6in)								
Size	42	44	46	48	50	52	54	56	58
Bust	cm	84	88	92	96	100	104	108	112
	in	33,1	34,7	36,2	37,8	39,4	41	42,5	44,1
Waist	cm	62	66	70	74	78	82	86	90
	in	24,4	26	27,6	29,1	30,7	32,3	33,9	35,4
Hip	cm	92	96	100	104	108	112	116	120
	in	36,2	37,8	39,4	41	42,5	44,1	45,7	47,2

We would love to see your creations!

Use hashtag #DressyTalkPatterns,

share and follow us:



@dressy_talk



Dressy Talk



Dressy Talk




Join our mailing list to get special offers and free patterns regularly

<http://bit.ly/DT-Special-Offers>


Visit shop.dressytalk.com for more sewing patterns and tutorials from the Dressy Talk collection!

Notches guide


Front

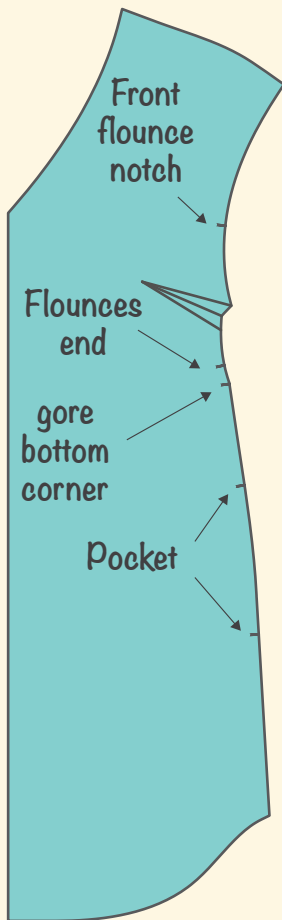


Back

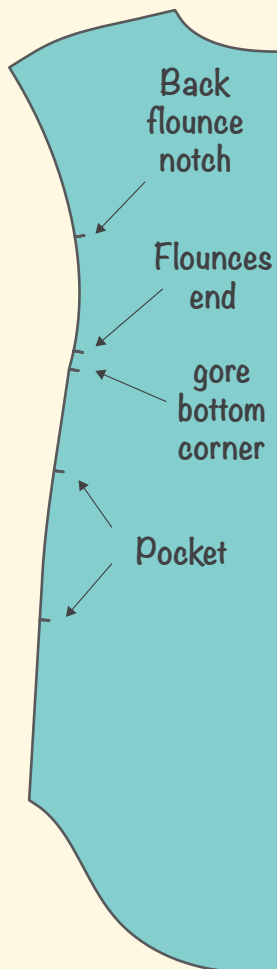


Under flounce

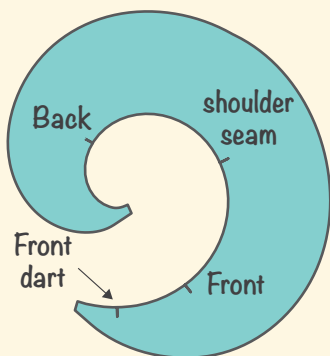

Upper flounce

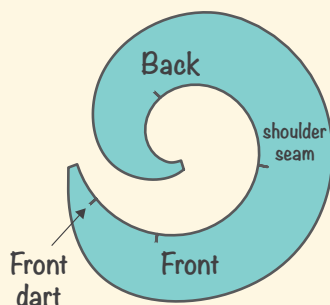


Gore

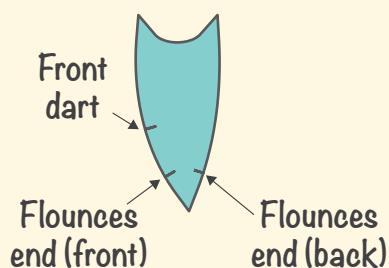

01

Sew the front darts



Sew the front darts right sides together, press them up.

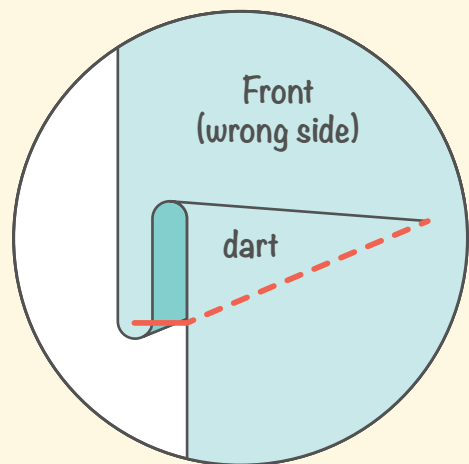

02

Sew the shoulder seams

Sew the shoulder seams right sides together, serge the allowances together, press them towards the back.

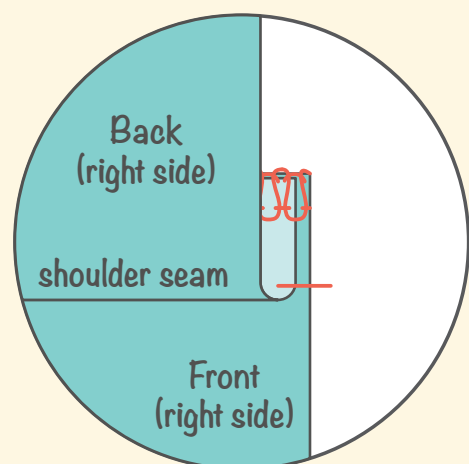
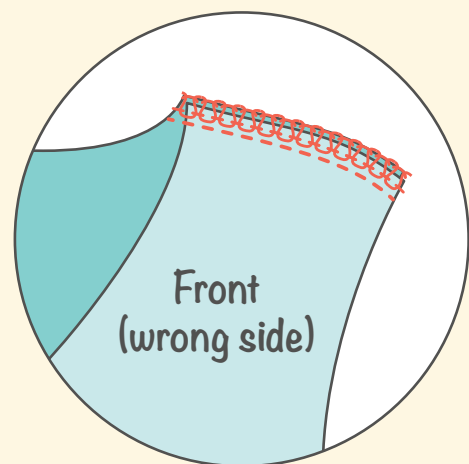


03 Finish the neckline with the binding

The back and front neckline can be finished with one of the following techniques:


3.1 Use the ready-made bias tape matching color and thickness (you can also make a bias tape from the basic fabric).

- Trim a piece of the tape the same length as the back and front neckline (measure the neckline on the paper pattern).
- Sew the bias tape to the bodice all the way around the open back and front neckline.
- Fold the bias tape over to the wrong side, slightly rolling the fabric, so that the bias tape is not visible from the right side. Topstitch the bias tape from the wrong side as close to the edge as possible (baste beforehand if needed). Press the neckline.

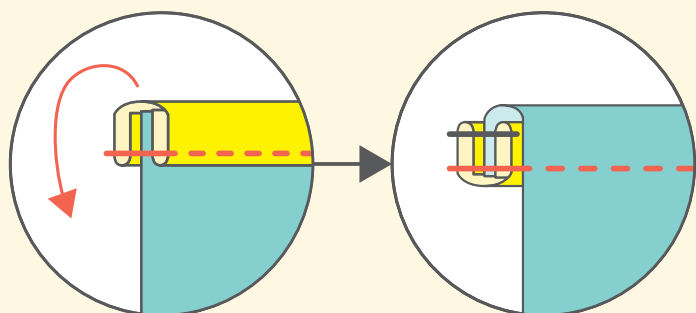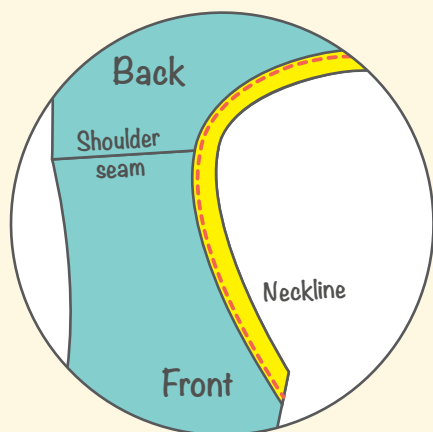

3.2 Cut the bias tape from the basic fabric the same length as the armhole.

- Fold and press the tape in half lengthwise wrong sides together.
- Sew the tape to the right side of the open front and back neckline, matching all raw edges.
- Fold and press the bias tape up.
- Fold the bias tape over to the wrong side, slightly rolling the fabric, so that the bias tape is not visible from the right side. Topstitch the bias tape from the wrong side as close to the edge as possible (baste beforehand if needed). Press the neckline.

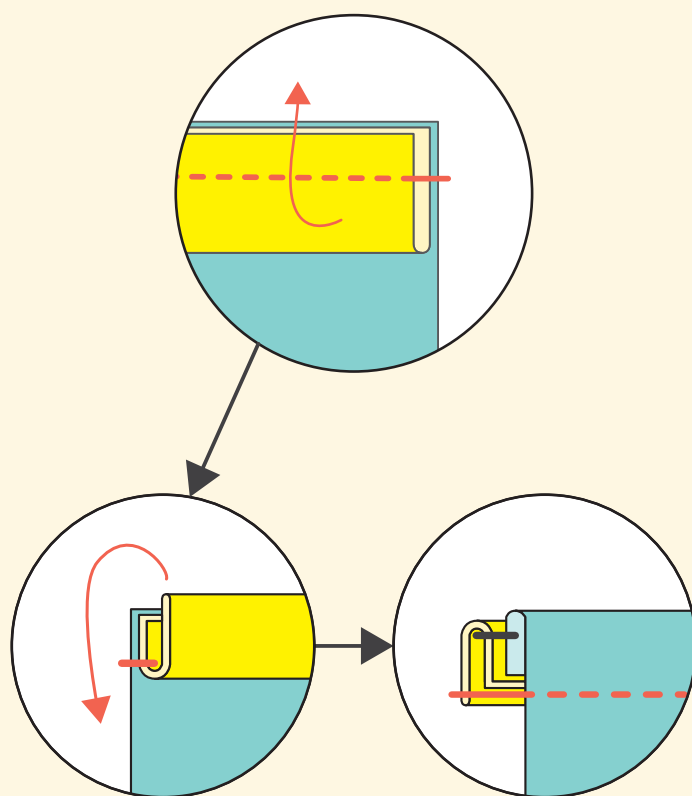


04


Sew the flounces

a) Finish the outer edges of the flounces with rolled serger stitching.

b) Sew the flounces together along the inner edges (the wrong side of the upper flounce together with the right side of the under flounce), press the seam flat.

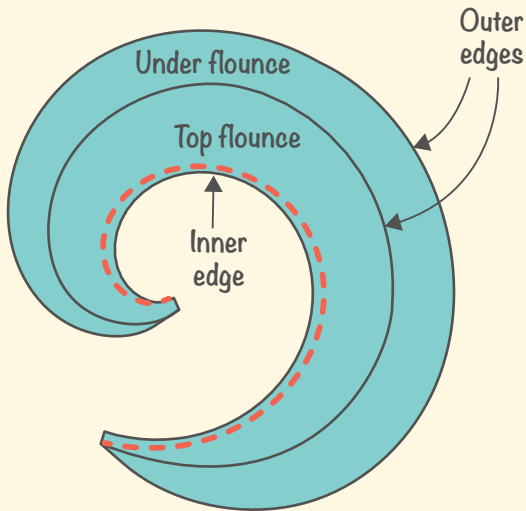

c) Sew the flounces to the armhole, press them flat.

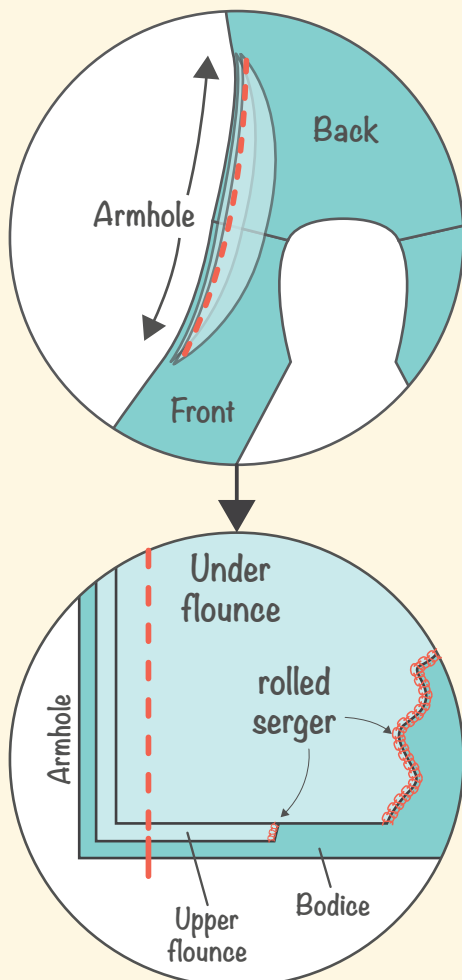


05

Sew the central front seam

a) Serge the front central edges from the right side, press them flat.

b) Sew the central front seam right sides together, press the allowances open.

c) Double topstitch the central front seam.

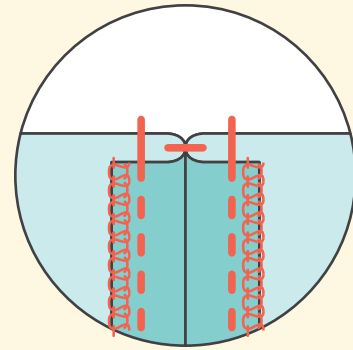


06

Sew the gore (side insert)

a) Finish the gore armhole edge (the top edge) with the binding the same way as the bodice neckline.


b) Sew the gore to the front right sides together, following the notches, serge the allowances together, continue serging all the way around the armhole. Press the allowances towards the bodice.

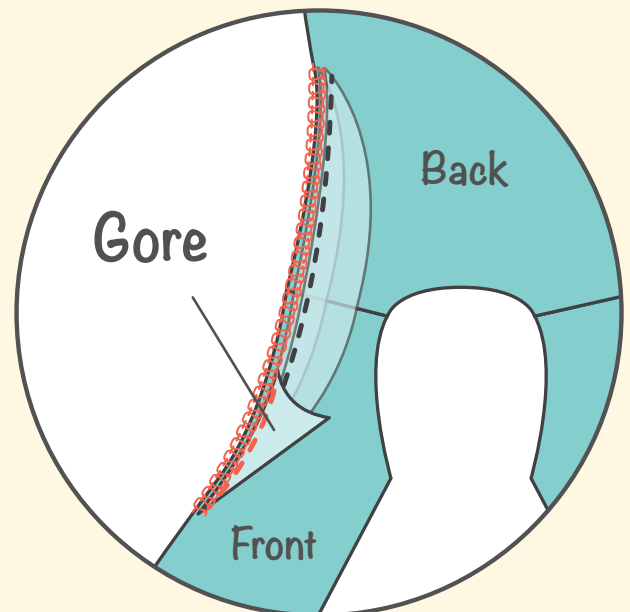


07

Sew the side seam


- Fuse the pocket pieces from the wrong side along the pocket opening edges with the fusible tape.
- Sew the pocket pieces to the front and back right sides together at 0,6 cm (1/4 in) distance from the edge.
- Serge the seam allowances together (only at the pocket area).

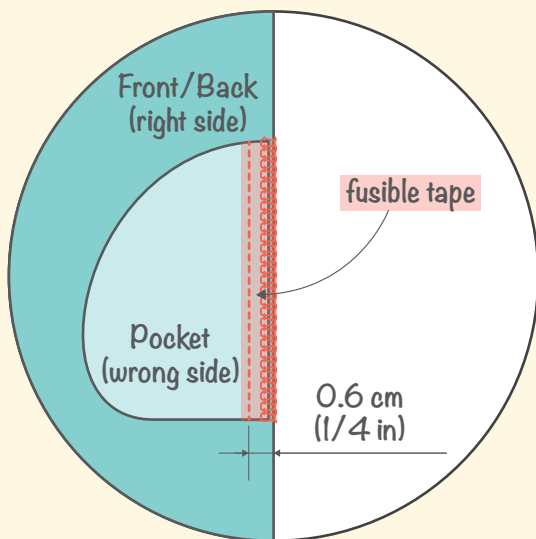

- Turn the pocket pieces out, press the seam allowances towards the pocket, topstitch from the right side of the pocket as close to the seam line as possible.

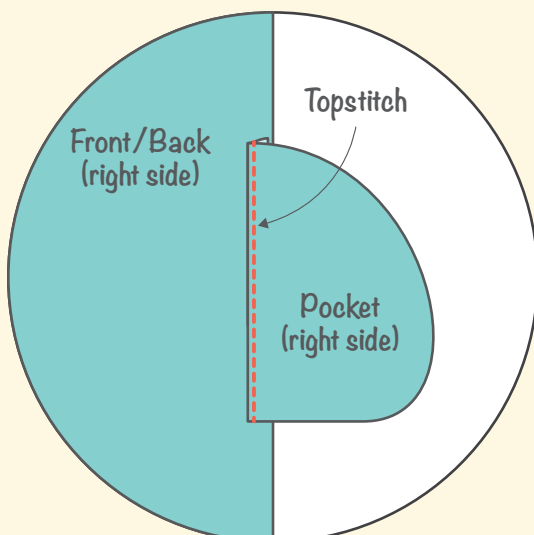

- Sew the side seam and pocket pieces with one stitching, starting from the top edge of the gore, serge the allowances together (also with one stitching), press them towards the back.

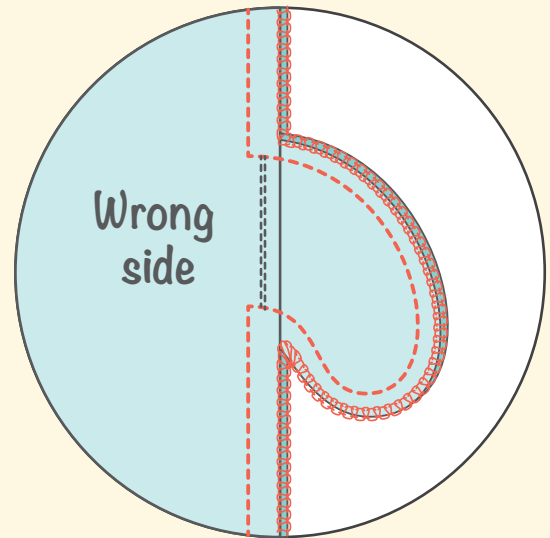

08

Sew the double-folded hem

- Fold and press the hem over to the wrong side twice (the half of the seam allowance each time). Baste the hem, sew the hem on the sewing machine, remove the handstitches, press the hem again.

